

Please Note:

The following two pages are a  
correction to Contract #1240.

posted 7/2/09

## UNIT DESCRIPTION

### CONIFER RELEASE, GROUND HERBICIDE

INVITATION TO BID # 1240

**Region:** NORTHWEST

**District:** BAKER

**Local:** HAMILTON

**Unit Name:** Alger HWD A&B

**Item Number:** 2

**Unit Number:** BK-10

**Section(s):** 9

**Township:** 36N

**Range:** 4E W.M.

**Trust:** 01

**Acres:** 30

**Section(s):** 16

**Township:** 36N

**Range:** 4E W.M.

**Trust:** 01

**Acres:** 10

**Total:** 40

### SPECIFICATIONS

**Contract Period:** August 3 - 14, 2009

**Minimum Crew Size:** 6

**Boundaries:** See unit map.

**Buffer Zones:** Avoid herbicide application in stream channels with water present.

**Vegetation To Be Treated:** Red elderberry.

Product (Trade Name)	Active Ingredient (A.I.)	A.I. Concentration	Rate/ Acre	Total Solution/Ac	Carrier	Marking Required
Transline	Clopyralid	40.9% by weight	8 oz.	10 gallons	Water	Dye compatible with herbicide. Flag strip edges.
Syl Gard, Kinetic or Slither	N/A	0.5 oz				

**Treatment Technique and Rate:** Ground broadcast, waving wand foliar application with backpack sprayers. Spray foliage till wet.

**Special Requirements:** Herbicide must be mixed on site in the presence of the DNR compliance representative. Applicator's equipment and application method must be in compliance with herbicide labels and Department of Agriculture regulations.

**GENERAL INFORMATION** – The following information is provided as a courtesy to bidders. This information is a general estimate and as such may not be accurate.

**Elevation:** 615 – 1010 Ft.

**Slope:** 33% Average

**Aspect:** W

**Gate:** Yes

**Access:** From Sedro-Woolley, travel north on Hwy 9 for 5 miles and turn left onto Prairie Rd. Follow Prairie Rd. for 3 miles and turn right on Parson Creek Rd. Go 1.2 miles on Parson Creek and turn right onto Skaarup Rd. Go 0.5 miles on Skaarup Rd. to the locked gate. The road becomes the AL-MI. Follow the AL-ML for 2 miles and turn left onto the A-1200. Go through the locked gate and follow the A-1200 for 1 mile to where the road is abandoned. There is a 0.25 mile walk to the units.


**Additional Comments:** Unit is behind a locked gate. **All road within the units is abandoned.** Please contact the Northwest Region Office for gate information 360-856-3500. Year Harvested 2005.

**Nearest Hospital:** United General Hospital: 1971 Highway 20, Sedro Woolley, WA. Ph: (360) 856-6021

BK- 10  
ALGER HWD A & B  
40 ACRES

# UNIT MAP

## Invitation to Bid Number 1240 Item 2



Roads	Treatment Unit	
Abandoned Road	DNR-Managed Lands	
Timber	ROAD	

Please Note:

This document is the original

Contract #1240

posted 6/23/09

State of Washington  
Department of Natural Resources  
Peter Goldmark, Commissioner of Public Lands  
Olympia, Washington 98504

INVITATION TO BID NUMBER **1240**

Contract Digest for Conifer Release/Site Preparation Ground Herbicide

SECTION I

Notice To All Contractors  
Instructions to Bidders

SECTION II

Division I - Bidding Requirements  
Division II - General Provisions  
Division III - Specifications

SECTION III

Unit Descriptions  
Unit Maps  
Vicinity Maps

SECTION IV

Bid Form

SECTION V

Offer and Contract Award

SECTION VI

Chemical Application Record

**Please note the following:**

- 1. Items 1 and 2 have different application timing windows for site prep (see Unit Descriptions). Items 1 and 2 included both site prep and conifer release. Please note that required herbicides and herbicide quantities vary.**
- 2. Please see 3-21.1 for a list of approved generic herbicides.**

SECTION I

NOTICE TO ALL CONTRACTORS

Bids will be received at the Department's Northwest Region office. Mailing address:

Department of Natural Resources  
919 North Township Street  
Sedro Woolley WA 98284

Bid Opening: Bids will be accepted at the Department's Northwest Region office until 2:00 P.M. Pacific Standard Time, **July 8, 2009** at which time and place all bids will be opened and read aloud.

You are invited to bid this work and are advised to examine the areas prior to bidding. Questions pertaining to unit(s) can be answered by contacting Department Representative Chris Hankey at (360) 856-3500.

INSTRUCTIONS TO ALL BIDDERS

The completed bid form and bid deposit must be received at the Department's Northwest Region office prior to 2:00 P.M. Pacific Standard Time on **July 8, 2009**

The sealed bid envelope should be prepared in the following manner:

Addressed to: William J. Wallace, Region Manager  
Department of Natural Resources  
919 North Township Street  
Sedro Woolley, WA 98284

Upper left corner: Bidder's Address

Lower left corner: Conifer Release /Site Preparation Ground Herbicide - "Sealed Bid"  
Invitation to Bid No. **1240**

Deliver completed bid forms, bid deposits, performance/damage deposits, certification of insurance, Contractor's Declaration of Industrial Insurance, and equipment and/or operator certifications when required to:

Chris Hankey, Region Intensive Management Forester  
Department of Natural Resources  
919 North Township Street  
Sedro Woolley, WA 98284

Questions concerning this Invitation to Bid should be referred to Department Representative Chris Hankey of the Northwest Region office by calling (360) 856-3500.

## SECTION II

### SECTION II – Division I – Bidding Requirements

#### 1-10 Preparation of Bids

- 1-11 Bidders are expected to examine this entire Invitation to Bid and are urged to inspect the work unit(s) prior to submission of any bid. No consideration shall be given any claim of bidding without comprehension of conditions.

#### 1-20 Submission of Bids

- 1-21 Your bid response to this Invitation to Bid/Contract is an offer to contract with the Department of Natural Resources. A bid response becomes a contract when officially accepted and awarded by the Department as evidenced by return of a countersigned SECTION V, "Offer and Contract Award".
- 1-22 Bids shall be submitted using the Bid Form, and the Offer and Contract Award form from SECTIONS IV and V of this document. The following shall be delivered to the Department's Region office in an envelope which shall be marked "Sealed Bid" and addressed to the Department's Region Manager as specified in Instructions To All Bidders (page 4): The Bid Form and the Offer and Contract Award form properly completed and signed, and a bid deposit as specified in Clause 1-23. No Facsimiled, E-mailed or any other non-original form of bids will be considered. Failure to comply with the above requirements or the requirements of Clause 1-23 prior to bid opening shall be cause to reject the Contractor's bid(s).
- 1-23 A bid deposit (guarantee) in the amount of FIVE HUNDRED DOLLARS (\$500) is required. This deposit is for the express purpose of assuring the Department that the Contractor will honor said bid and accept the award of any and all items on which the Contractor may be the lowest responsible bidder. In the event the Contractor fails to honor said bid by rejecting award of any item, the Contractor will automatically forfeit the bid deposit of FIVE HUNDRED DOLLARS (\$500). The bid deposit must be in the form of a certified check or money order and must be delivered to the Department's Regional office as per Clause 1-22. The bid deposit of a successful bidder will be released when the required performance/damage deposit (Clause 1-31) has been submitted and approved. Bid deposits of unsuccessful bidders will be returned at the conclusion of bidding.

#### 1-30 Performance/Damage Deposit

- 1-31 Contractor agrees to furnish a performance/damage deposit in the amount of ten percent (10%) of the Contractor's total award. The deposit shall be submitted as per Clause 1-45, and shall be in the form of certified check, savings account assignment, or irrevocable letter of credit acceptable to the Department. This deposit is to guarantee performance of all provisions of this contract and payment of any damages caused by operations under this contract or resulting from Contractors's noncompliance with any contract provisions or the law.
- 1-32 Bid deposits may be converted to apply to part or all of the required performance/damage deposits after successfully securing a bid.

#### 1-40 Award of Contract

- 1-41 Oral explanation and interpretations prior to bid opening shall not be binding.
- 1-42 Award of the contract shall be on the basis of an "Item" as specified in the Bid Form. An "Item" shall be a specific group of individual "Units". "Items" to be awarded are identified in the Bid Form. Individual "Units" are described in the Unit Description. The Department reserves the right to amend this Invitation to Bid by giving written notification to all bidders seven (7) days or more prior to bid opening.
- 1-43 Award of contract shall be to the lowest responsible bidder as determined by the Department of Natural Resources (Clauses 1-44 and 1-45). To be considered, bids must conform to the bidding requirements herein,

except that the Department may waive informalities and minor irregularities in bids received. The Department further reserves the right to reject any or all bids received.

- 1-44 Award is conditioned in addition to price, on the Contractor showing upon request by the Department of Natural Resources the capability of fulfilling the contract terms herein by reason of past performance, ability to complete work in the specified time, previous and existing compliance with laws relating to this contract, and the character, reputation, judgment, and experience of the bidder, and other information which may be secured and have a bearing upon award. Failure to demonstrate this capability or to conform to the contract terms herein, will nullify award on all or certain items tentatively awarded. In the event of such failure, the Department shall be the sole judge of the items to be selected for award and/or nullification of award.
- 1-45 A Notice of Award will be mailed to the successful bidder not later than five (5) working days following bid opening. The contract award is conditioned on the following: Within ten (10) days after the Contractor receives the Notice of Award or within fifteen (15) days from bid opening, whatever is shorter, the Department must receive from the Contractor the performance/damage deposit, a copy of Contractor's Farm Labor License, a copy of Contractor's Commercial Pesticide Applicator's License, proof of Workman's Compensation Insurance, and certification of insurance as specified in Clauses 1-31, 2-24 and 2-29, and furthermore, the Contractor shall submit the aforementioned through the Department's Region office specified in Instructions To All Bidders (page 3). It shall be the Department's prerogative to extend the time allowed for receipt of the above items if such an extension is in the best interest of the Department. Failure by the Contractor to submit the above items to the Department within the time specified or within an extension of that time as provided for shall be cause for the Department to consider the contract award rejected (Clause 1-22).
- 1-46 The Contractor is also required to notify the Department of Labor and Industries of the award of this contract on the appropriate Report by Contractor form.

#### 1-50 Gate Access

- 1-51 Northwest Region has installed a lock system on Region gates that will permit a single key to access gates throughout the Region. To preview contract units, prospective bidders can request, in writing, the loan of a key.
- 1-52 All keys remain the property of the Department of Natural Resources. Key recipient acknowledges that the key will be used only for official authorized purposes upon State managed lands. Official authorized purposes do not include any recreation activities. Unauthorized access or use will be considered trespass. Unauthorized access through private gates or upon private property will be considered trespass. Violations will result in the immediate confiscation of the key.
- 1-53 All keys will be returned upon request of the Department of Natural Resources. Replacement of lost keys will cost \$300.00.

## SECTION II - Division II – General Requirements

### 2-10 Definitions

- 2-11 Department: The Department of Natural Resources of the State of Washington, action by or through an authorized employee or agent.
- 2-12 Contractor: The person, partnership, or corporation to whom the contract is awarded.

### 2-20 Responsibilities and Legal Relations

- 2-21 The Contractor shall abide by and comply with all the laws and regulations of the United States, State of Washington, and counties wherein the work is executed insofar as they affect his/her contract. The Contractor will make any payments, contributions, remittances and all reports and statements required under said laws.
- 2-22 The Contractor shall, without additional expense to the Department, obtain all required licenses and permits necessary for executing provisions of his/her contract with the Department.
- 2-23 The Contractor shall save harmless the State of Washington, the Department, their officers, agents and employees from any and all claims for damages, injuries to persons or property that may occur as a result of the performance of the Contractor, agents or employees in connection with this contract.
- 2-24 The Contractor shall have and maintain for the life of the contract, liability insurance covering each motor vehicle operating hereunder with limits not less than \$1,000,000 of personal injury and property damage. The Department shall be supplied with a certificate of insurance coverage, as per Clause 1-45.
- 2-25 The Contractor shall abide by and comply with all laws and regulations of the United States, State of Washington, and counties wherein the work is executed insofar as they affect the safety, health and welfare of any and all employees.
- 2-26 In the event of legal conflict, the Contractor agrees to submit to the jurisdiction of the courts of the State of Washington and further agrees the venue shall be laid in Thurston County.
- 2-27 The State is not liable for delay or non-shipment of supplies and materials or for delay or nonperformance of its obligations if occasioned by war, civil commotions, strikes, lockouts, or labor disturbances.
- 2-28 For all active work sites the Contractor shall provide a contract representative who shall be on the site and responsible for directing the contracted activities of that site. The Contractor shall designate the contract representative(s) in writing at the time of the prework conference (Clause 2-71). The contract representative shall maintain a valid pesticide commercial applicators license on the site at all times when pesticide is being mixed or applied. All work on a site will be under the direct supervision of a licensed commercial applicator.
- 2-29 The Contractor shall complete and submit to the Department the Contractor's Declaration of Industrial Insurance Status form; the form shall be submitted as per Clause 1-45. The Industrial Insurance account shall be in the Contractor's name as it appears on the Invitation to Bid. If the name on the Industrial Insurance account is different from that on the Invitation to Bid, the Contractor will be considered to be subcontracting subject to Clause 2-31.

### 2-30 Subcontracting

- 2-31 The Contractor shall not, without written approval from the Department enter into any subcontract or assignment of contract relating to the performance of this contract.
- 2-32 All laws and regulations applicable to the contract also apply to all subcontracts.

- 2-33 The Contractor shall provide to the Department a copy of the Subcontractor's Farm Labor License, proof of Workman's Compensation Insurance, proof of Insurance, and Pesticide Applicator's License.

#### 2-40 Determination of Payment

- 2-41 The boundaries as designated under Clause Section 2-100, and defined in detail on the Unit Description attached, provide the basis for determining acreage completed. Failure to complete work to boundaries established by the Department renders work unsatisfactorily completed. The Contractor is to take the initiative in determining whether boundaries are sufficiently marked. No consideration will be given for work that extends beyond unit boundaries. If work extends beyond unit boundaries, charges may be levied against the Contractor by the Department for damages suffered.
- 2-42 Contract compliance inspection of work performed and payment for work performed will be based on acreage completed (Clause 2-41).
- 2-42.1 Using specifications contained in the Unit Description the Department representative will inspect and determine if work performed is satisfactory.
- 2-43 The Department may at its option subdivide and inspect units to determine the acceptability of work performed. Subdivisions for this purpose will be a minimum of ten (10) acres in size.
- 2-44 At the Department's option, the Contractor shall rework a unit or subdivision of a unit on which the Contractor's work performance is not rated satisfactory, and further, it shall be the Department's option to require the rework be completed prior to starting new work. Reworked areas will be reexamined for contract compliance, the resulting performance rating will supersede the previous performance rating for the area in question.
- 2-45 Payment shall be made as follows:
- 2-45.1 Payment may be made by the month, unit or by one total payment. Details of payment schedule will be determined in the prework conference (Clause 2-71). The Department will attempt to comply with the desires and needs of the Contractor but assumes no legal duty or obligation to adhere to the schedule of payment so arranged.
- 2-45.2 Partial payment may be made upon completion of part of an Item(s) determined by the Department. Request for partial payment is to be made by the Contractor utilizing the Contractor's Billing Invoice and Compliance Report provided by the Department. The Contractor or contract representative (Clause 2-28) shall sign the Contractor's Billing Invoice and Compliance Report after completion of each sub-item submitted for payment. The Department representative will then make payment recommendations for the invoice and forward the Contractor's Billing Invoice and Compliance Report to the Department's Regional office for processing.
- 2-45.3 The Contractor or contract representative (Clause 2-28) and the Department representative shall sign the Contractor's Billing Invoice and Compliance Report form at the conclusion of work. Final payment will not be made to the Contractor unless the Contractor's Billing Invoice and Compliance Report form are signed by the Contractor or contract representative and the Department representative, and "final" payment is designated thereon.
- 2-45.4 If a unit's contract acreage is disputed the Contractor may upon completion of the unit request a verification traverse by the Department, the request must be in writing and signed by the Contractor. The Department will pay the Contractor based on acres determined from the verification traverse. If the verification traverse indicates the net acres specified in the Unit Description are correct within plus or minus five percent (5%) the Contractor shall pay the cost of the verification traverse at a rate of ten dollars (\$10.00) per one hundred (100) feet of traversed boundary.

2-45.5 Five percent (5%) of all payments due Contractors who employ workers shall be retained by DNR as security for L&I industrial insurance premiums owed for their workers. Upon determination that the Contractor has met all financial obligations for industrial insurance premiums related to the Item(s) of this Contract, the 5% retainage will be returned to the Contractor.

## 2-50 Nondiscrimination

2-51 Except to the extent permitted by a bona fide occupational qualification the Contractor agrees as follows:

2-51.1 The Contractor shall not discriminate against any employee or applicant for employment because of race, creed, national origin, sex or age. The Contractor will insure that applicants are employed and that employees are treated during employment without regard to race, creed, color, national origin, sex, or age. Such action shall include, but not be limited to, the following: employment, upgrading, demotion or transfer, recruitment or recruiting advertising, layoff or termination, rates of pay or other forms of compensation and selection for training.

2-51.2 The Contractor shall, in all solicitations for employees or job orders for employees placed with any employment agency, union or other firm or agency, state that all qualified applicants will receive consideration for employment without regard to race, creed, color, national origin, sex or age. The words "equal opportunity employer" in advertisements shall constitute compliance with this section.

2-51.3 The Contractor shall send to each labor union or representative of workers with which the Contractor has a collective bargaining agreement or other contract or understanding, a notice of advising the said labor union, or worker's representative of the Contractor's commitments under this section.

2-51.4 The Contractor shall include the provisions of the foregoing paragraphs: 2-51.1, 2-51.2, and 2-51.3 in every subcontract or purchase order for the goods or services which are the subject matter of this contract.

2-52 In the event of noncompliance by the Contractor with any of the nondiscrimination provisions of the contract, the Department shall have the right, as its option, to cancel the contract in whole or in part. The Contractor shall be paid only for that work performed prior to cancellation of the contract and in accordance with provisions of the contract (Clause 2-40). In the event the Department suffers damages resulting from such noncompliance the Contractor shall be liable.

## 2-60 Contract Administration

2-61 The Region Manager will designate a representative(s) to enforce compliance of the contract as required in all specifications and to make recommendations for payment.

## 2-70 Contract Work Procedure

2-71 The Contractor shall attend a prework conference prior to commencing contract work (see Clause 2-72). The time and place of the prework conference shall be determined by the Department and the Contractor will be notified of the time and place when the contract is awarded. When considered practical by the Department the time and/or place of the prework conference may be altered if requested in writing by the Contractor.

2-72 A work schedule is required from the contractor. The work schedule shall be set at the prework conference (Clause 2-71) and must be acceptable to the Department. To be acceptable the work schedule must be practicable: The work schedule must identify the latest date by which the Contractor agrees to commence contract work on each unit awarded. The work schedule must allow a reasonable time period for the work to be completed according to contract requirements herein, and further, if more than one unit has been awarded the work schedule must indicate the sequence in which the units will be worked by the Contractor. If for any reason during the contract period the Contractor's work schedule is no longer viable, the Contractor must submit a revised work schedule for Department approval.

- 2-73 The Contractor shall obtain written permission to begin work on a unit. Such permission shall be applied for through the Department's Regional office listed in the Notice To All Bidders section of the contract. Permission requests will require a minimum of two working days to process. The Department at its option may require person-to-person discussions between the Contractor and selected Department representatives prior to granting the required written permission. In the event the Contractor stops work for a period of one (1) week or more, or if the initial start-up is delayed by one (1) week or more the Contractor must reapply for permission to begin work.
- 2-74 Work shall only proceed on regular Monday through Friday workdays. If allowed, work on weekends or designated State holidays will require written permission from the Department. Work will only proceed with a Department representative present on site.
- 2-75 Prior to the start of work, the Contractor must provide proof of an established Washington State Workman's Compensation Insurance Account. Out-of-State contractors covered by reciprocal agreements must also establish a Washington State Account.

#### 2-80 Work Progress and Contract Performance

- 2-81 The Contractor shall begin work as per the work schedule (Clause 2-72) and according to contract requirements herein (see Clauses 2-71 and 2-73). The Contractor shall work diligently and complete the unit(s) within the contract period specified in the Unit Description. As units are sequenced in the work schedule, work started on one unit must be completed prior to beginning work on the next.
- 2-82 The Department reserves the right to modify or cancel this contract in part or whole without cause. The Contractor shall be paid only for that work performed prior to cancellation of the contract and in accordance with provisions of the contract (Clause 2-40).
- 2-83 Nonperformance or unsatisfactory performance or willful violation of contract requirements by the Contractor shall constitute breach of contract. The Department may at its sole option extend the contract and collect liquidated damages or terminate the contract with forfeiture of the performance/damage deposit or declare breach of contract and make claim for actual damages suffered by the Department.

#### 2-90 Fire Responsibility

- 2-91 The Contractor and the Contractor's employees shall familiarize themselves with the Washington State Forest Fire Protection Requirements and adhere to them at all times. The operation will be subject to inspection by State personnel for adherence to regulations and presence of fire tools. All spark emitting engines will be equipped with approved spark arresters.
- 2-92 The Contractor shall not operate faulty power equipment.
- 2-93 The Contractor shall not build any open fires at anytime of the year on the contract area without first obtaining written permission from the Department.
- 2-94 If a fire waiver is granted, Contractor shall abide by the provisions of the waiver.

#### 2-100 Boundaries

- 2-101 The boundaries except for easily identified ground features have been plainly marked with colored plastic flagging.
- 2-102 Net acreage as indicated in the Unit Description was measured on the horizontal plane. Large openings, roads, and buffer zones have been deducted from the gross acreage and are designated on the unit map.

## 2-110 Merchantable Products

- 2-111 This contract, unless specifically amended, in no way permits the contractor to remove merchantable or potentially merchantable products from the operating area for the purpose of sale or use. Contractors wanting to remove Christmas trees, boughs, brush pickings, decorative shrubs, or trees, firewood, poles, posts and other merchantable or potentially merchantable material from Department managed land must enter into a separate agreement with the Department.

## 2-120 Litter and Refuse

- 2-121 Litter and/or refuse brought into operating areas or campsites and rest areas used by the contractor or employees, shall be removed from the premises and disposed of in garbage disposal areas meeting all State, county, and local requirements. Such litter will include refuse resulting from equipment maintenance, abandoned equipment, and containers and other expended materials.

## 2-130 Camping

- 2-131 No camping will be permitted on Department lands.

## SECTION II - Division III – Specifications

### 3-10 Unit Description

- 3-11 The Unit Description details the characteristics and specific work requirements for each unit.
- 3-12 If specific requirements of the Unit Description conflict with the specifications in this division of the contract, the specific requirements of the Unit Description will prevail.

### 3-20 Contractor and Department Obligations

- 3-21 The Contractor shall be responsible for the following:
  - 3-21.1 To provide all herbicide and carrier required to perform contract work as specified in the Unit Description(s).  
**The Unit Description specifies brand name herbicides. The following approved generic herbicides may be used: glyphosate – Foresters, imazapyr – Polaris SP, Sulfometuron methyl – Spyder, Triclopyr – Element 4 or Tahoe 4E.**
  - 3-21.2 To provide liquid coloring agent for the chemicals applied. Liquid coloring agent shall be compatible with specified chemicals and carriers.
  - 3-21.3 Upon request, provide a sample of the herbicide solution being applied as treatment.
  - 3-21.4 To keep records of each day's application work. The records to be kept shall be as per the Department's "Chemical Application Record". The Contractor shall provide the Department with a copy of such records prior to payment for work completed, or at any time earlier if requested by the Department.
  - 3-21.5 To bear all costs of operation not specifically furnished by the Department under Clause Section 3-22.
  - 3-21.6 To provide a licensed Commercial Operator or Applicator on the work site when herbicide is being applied.
  - 3-21.7 To provide all workers adequate crew supervision and serviceable equipment to satisfactorily accomplish treatment of acres described in the Unit Description.
  - 3-21.8 To furnish all safety equipment including water for eye wash, personal protective equipment required by label, vehicle to transport workers and first aid kit on site.
  - 3-21.9 To mix and apply herbicide on site as per the Unit Description(s).
  - 3-21.10 To minimize herbicide contact with conifer trees.
  - 3-21.11 To identify treatment strips, spots, stems, or clumps with flagging.
  - 3-21.12 To properly dispose of all herbicide solutions, residues and empty containers.
  - 3-21.13 To cease operations when:
    - a) wind exceeds twelve (12) miles per hour, or
    - b) air temperature is less than 40°F or greater than 85°F, or
    - c) rainfall causes water to run down stems of target plants, or
    - d) the Department's representative determines spray conditions are unsuitable.
  - 3-21.14 To refrain from applying herbicide to Department designated buffer area.

3-22 The Department shall be responsible for the following:

3-22.1 To provide maps, photos or other data necessary to orient the Contractor.

3-22.2 To provide a Department representative to acquaint the Contractor with the unit(s) and to conduct periodic field inspections.

3-30 General Specifications

3-31 Any debris or soil deposited in ditches, culverts, or roadways shall be removed immediately.

3-32 Activities that will result in excessive deterioration of ditches, culverts, or roadways shall be avoided.

3-33 Any legal land subdivision survey corners and/or witness objects are to be preserved. If destroyed or disturbed such points shall be reestablished by a licensed land surveyor in accordance with the U.S. General Land Office Standards.

**SECTION III**

**UNIT DESCRIPTIONS**

**UNIT MAPS**

**VICINITY MAPS**

## UNIT DESCRIPTION

### SITE PREP, GROUND HERBICIDE

**INVITATION TO BID # 1240**

**Region:** NORTHWEST

**District:** CASCADE

**Local:** STARBIRD

**Unit Name:** WHITEHORSE FLATS PC

**Item Number:** 1

**Unit Number:** CA-1

**Section(s):** 16, 17, 21

**Township:** 32N

**Range:** 9E W.M.

**Trust:** 01

**Acres:** 17

**Total:** 17

### SPECIFICATIONS

**Contract Period:** August 3, 2009 - August 28, 2009

**Minimum Crew Size:** 8

**Boundaries:** All treatment areas are bounded by pink flagging.

**Buffer Zones:** No-spray 25-foot buffers will be applied to any flowing water not within timbered buffers.

**Vegetation To Be Treated:** All vegetation.

Product (Trade Name)	Active Ingredient (A.I.)	A.I. Concentration	Rate/Acre	Total Solution/Ac	Carrier	Marking Required
Accord Concentrate	Glyphosate	5.4 lbs/gal 53.8%	48 oz.	10 gallons	Water	Dye compatible with herbicide. Flag strip edges.
Chopper	Imazapyr	2.0 lbs/gal 27.6%	8 oz.			
Oust XP	Sulfometuron methyl	56.25% by weight	3 oz.			
Syltac, Phase or Dynamic	N/A	4 oz. Syltac or Phase 6 oz. Dynamic				

**Treatment Technique and Rate:** Ground broadcast, waving wand foliar application with backpack sprayers. Spray foliage till wet.

**Special Requirements:** Herbicide must be mixed on site in the presence of the DNR compliance representative. Applicator's equipment and application method must be in compliance with herbicide labels and Department of Agriculture regulations.

**GENERAL INFORMATION** – The following information is provided as a courtesy to bidders. This information is a general estimate and as such may not be accurate.

**Elevation:** 504' - 843'

**Slope:** 0% - 36%

**Aspect:** variable

**Access:** From Arlington, travel 20.4 miles east on HWY 530 to the AS-ML. Turn right and travel 1.3 miles to the unit on the right.

**Additional Comments:** The unit is behind a locked gate. Please call the NW Region office for information.

**Nearest Hospital:** Cascade Valley Hospital, 330 S Stillaquamish Ave, Arlington 360-435-2133

# UNIT MAP

## Ground Herbicide

Invitation to Bid No. 1240

Item No. 1

Unit No. CA-1

UNIT NAME: WHITEHORSE FLATS

FMU ID: 42844

TRUST: 01

ACRES: 17


REGION: NORTHWEST

DISTRICT: CASCADE


LOCAL: STARBIRD


COUNTY: SNOHOMISH

T32N-R9E SEC 16, 17, 21

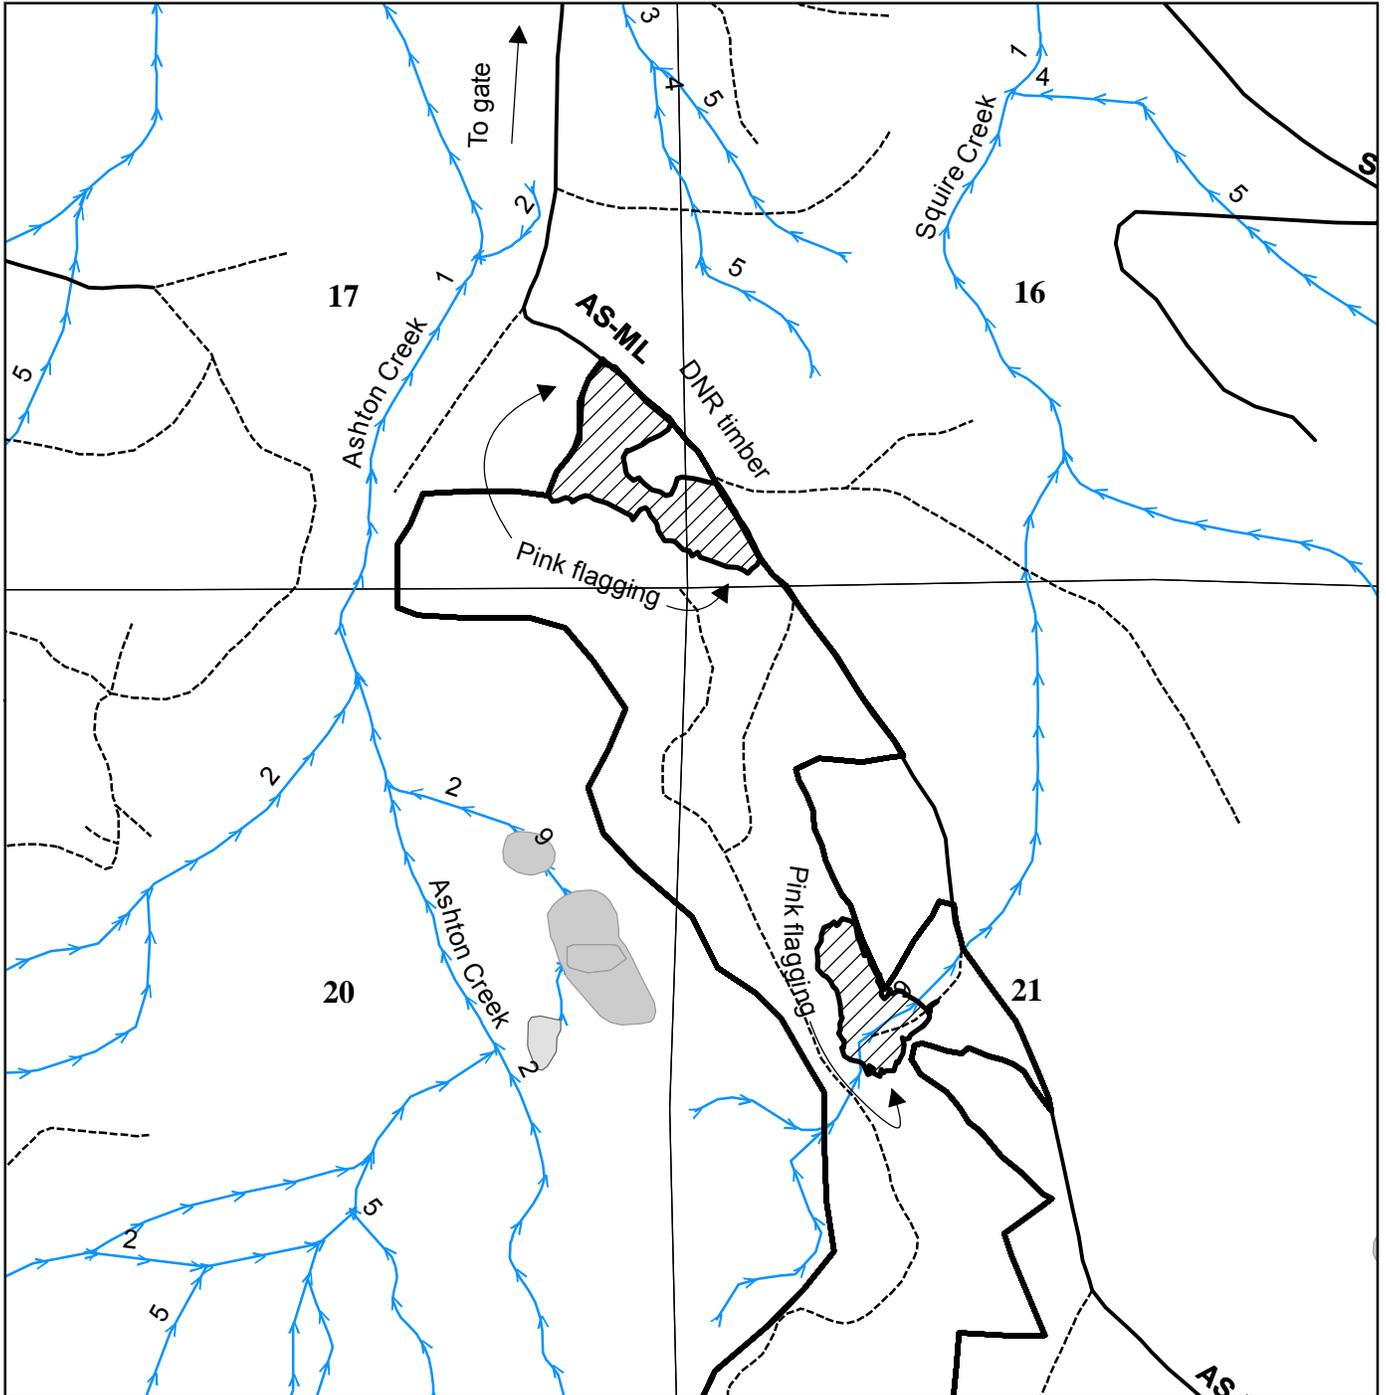

Scale 1:12,000

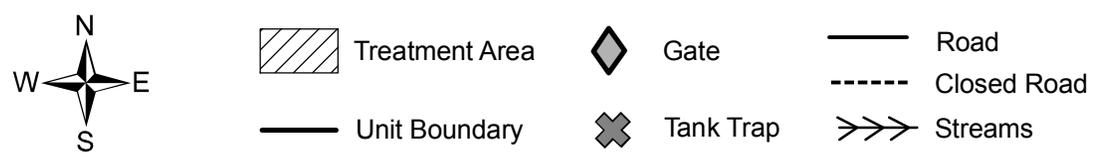

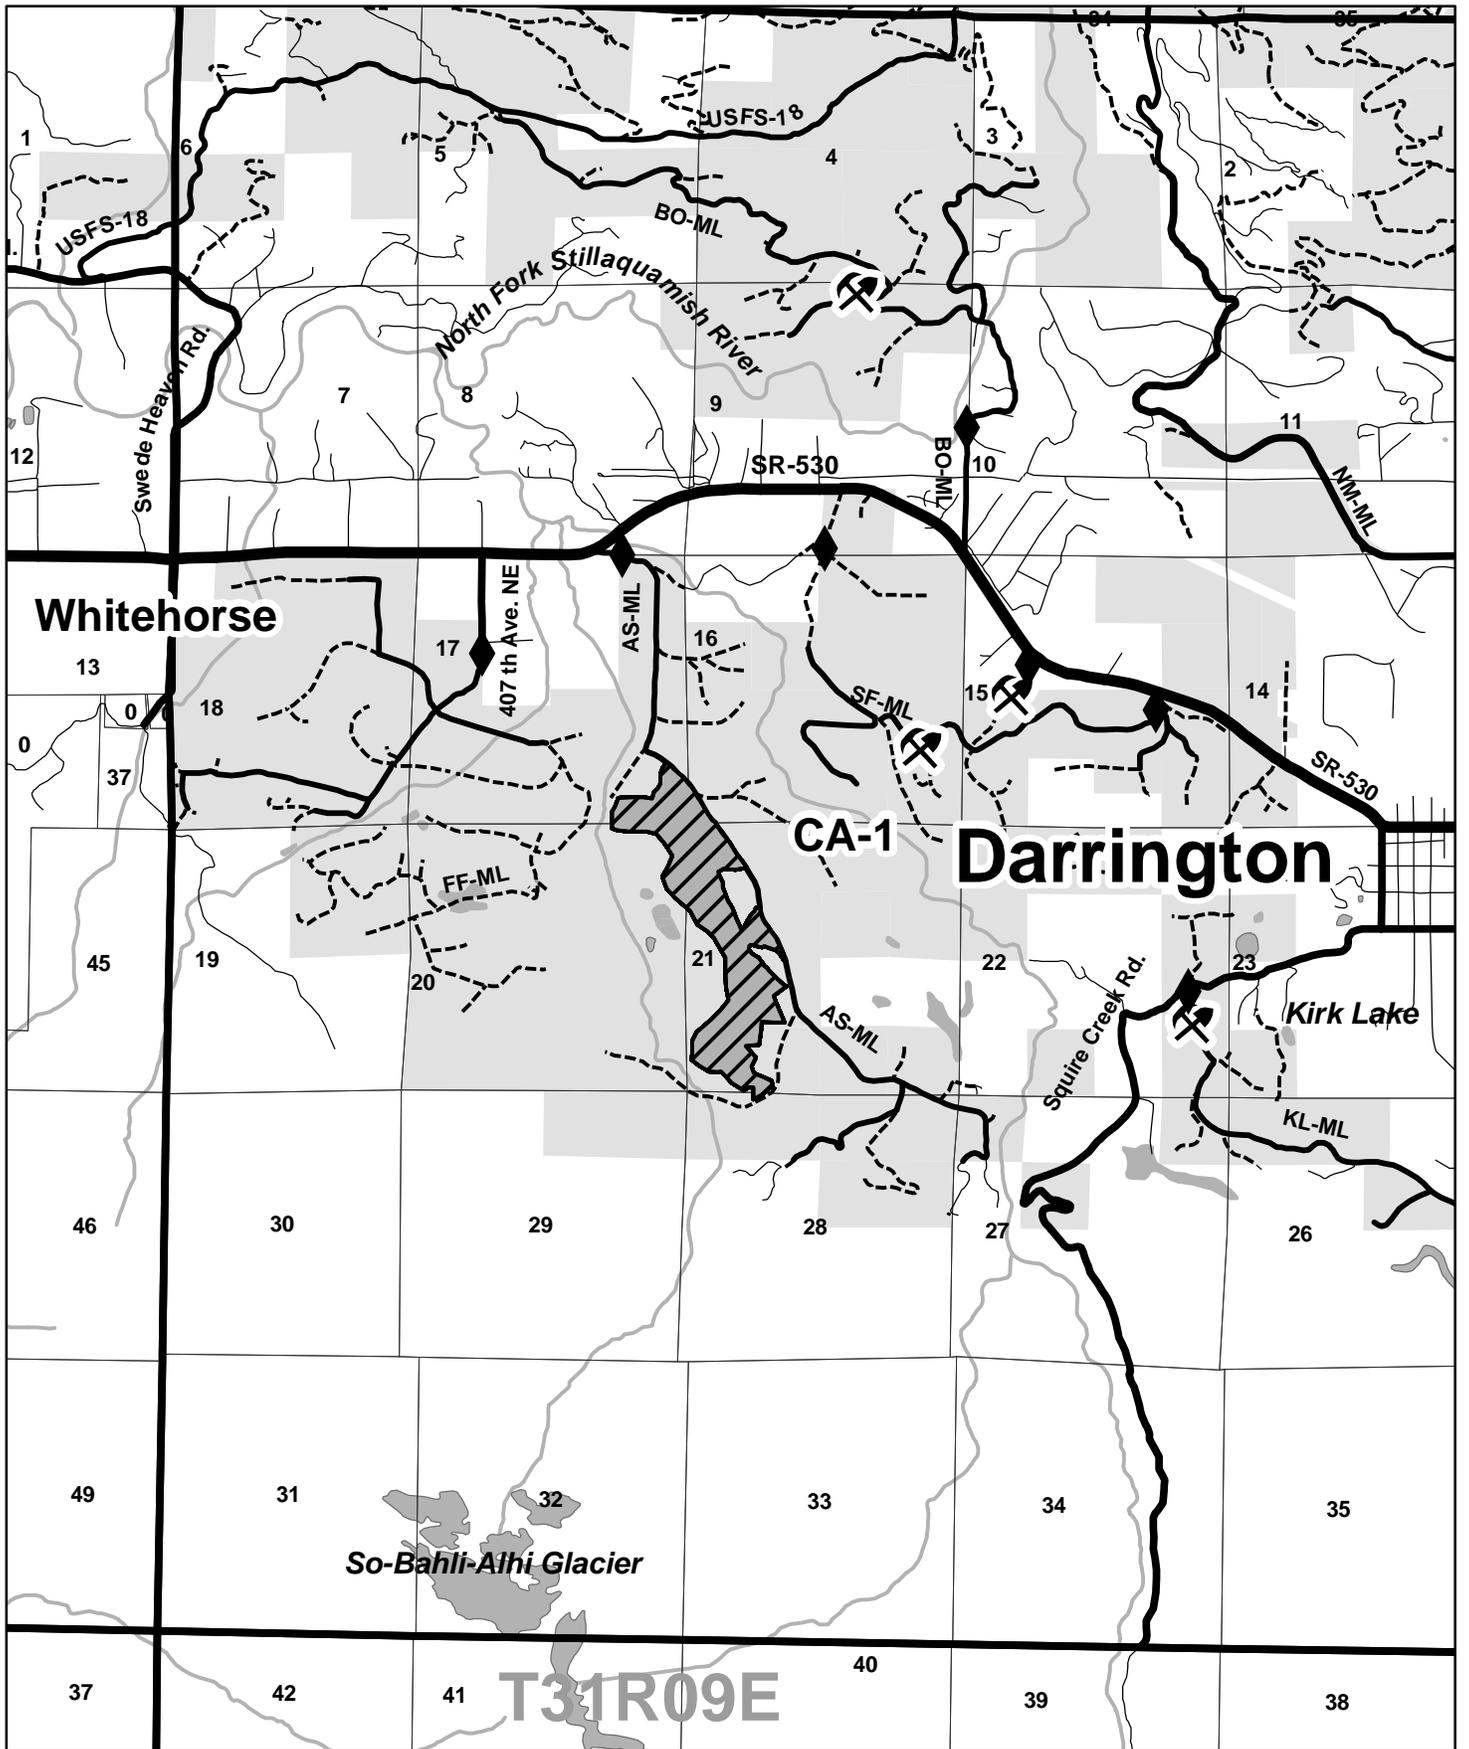

**Whitehorse**

**CA-1**

**Darrington**

**Kirk Lake**

**So-Bahli-Alhi Glacier**

**T31R09E**

**VICINITY MAP**



- Treatment Unit
- DNR-Managed Lands
- Active Road
- Closed Road
- Gates
- Rockpits

**UNIT DESCRIPTION**

**CONIFER RELEASE, GROUND HERBICIDE**

**INVITATION TO BID # 1240**

**Region:** NORTHWEST

**District:** CASCADE

**Local:** BOULDER

**Unit Name:** HARDWOOD PARTS U1

**Item Number:** 1

**Unit Number:** CA-2

**Section(s):** 36

**Township:** 28N **Range:** 8E W.M.

**Trust:** 03 **Acres:** 1

**Section(s):** 31

**Township:** 28N **Range:** 9E W.M.

**Trust:** 01 **Acres:** 12

**Total:** 13

**SPECIFICATIONS**

**Contract Period:** September 7, 2009 - September 30, 2009

**Minimum Crew Size:** 5

**Boundaries:** Private plantation to the north. The remainder of the unit is surrounded by DNR timber.

**Buffer Zones:** none

**Vegetation To Be Treated:** Everything except the crop trees. Species to be treated include Himalayan Blackberry and Butterfly Bush.

**Herbicide Generic Name:** Triclopyr **Active Ingredient:** 61.6% **Carrier:** water  
**Adjuvant:** Hasten

**Treatment Technique and Rate:** Directed spray application onto foliage using backpack sprayers. Care should be taken to direct spray away from conifer foliage. Application rate shall be 48 ounces Garlon 4 and 16 ounces Hasten per acre. Total solution is 10 gallons/acre. Spray foliage till wet.

**Special Requirements:** Herbicide must be mixed on site in the presence of the DNR compliance representative. Applicator's equipment and application method must be in compliance with herbicide labels and WSDA regulations.

**GENERAL INFORMATION** – The following information is provided as a courtesy to bidders. This information is a general estimate and as such may not be accurate.

**Elevation:** 304' - 466'

**Slope:** 3% - 22%

**Aspect:** south

**Access:** From Startup, travel 0.3 miles east on HWY 2 to Kellog Lake Road. Turn left and travel 0.2 miles to the WF-ML. Turn right, pass through the gate, and travel 2.0 miles to the west edge of the unit.

**Additional Comments:** The unit is behind a locked gate. Please call the NW Region office for information.

**Nearest Hospital:** Valley General Hospital, 14701 179<sup>th</sup> ST SE, Monroe WA 360-794-7497

# UNIT MAP

## Ground Herbicide

Invitation to Bid No. 1240


Item No. 1

Unit No. CA-2

UNIT NAME: HARDWOOD PARTS U1  
FMU ID:28249  
TRUST: 01, 03  
ACRES: 13

REGION: NORTHWEST  
DISTRICT: CASCADE  
LOCAL: BOULDER  
COUNTY: SNOHOMISH

T28N-R9E SEC 31  
T28N-R8E SEC 36

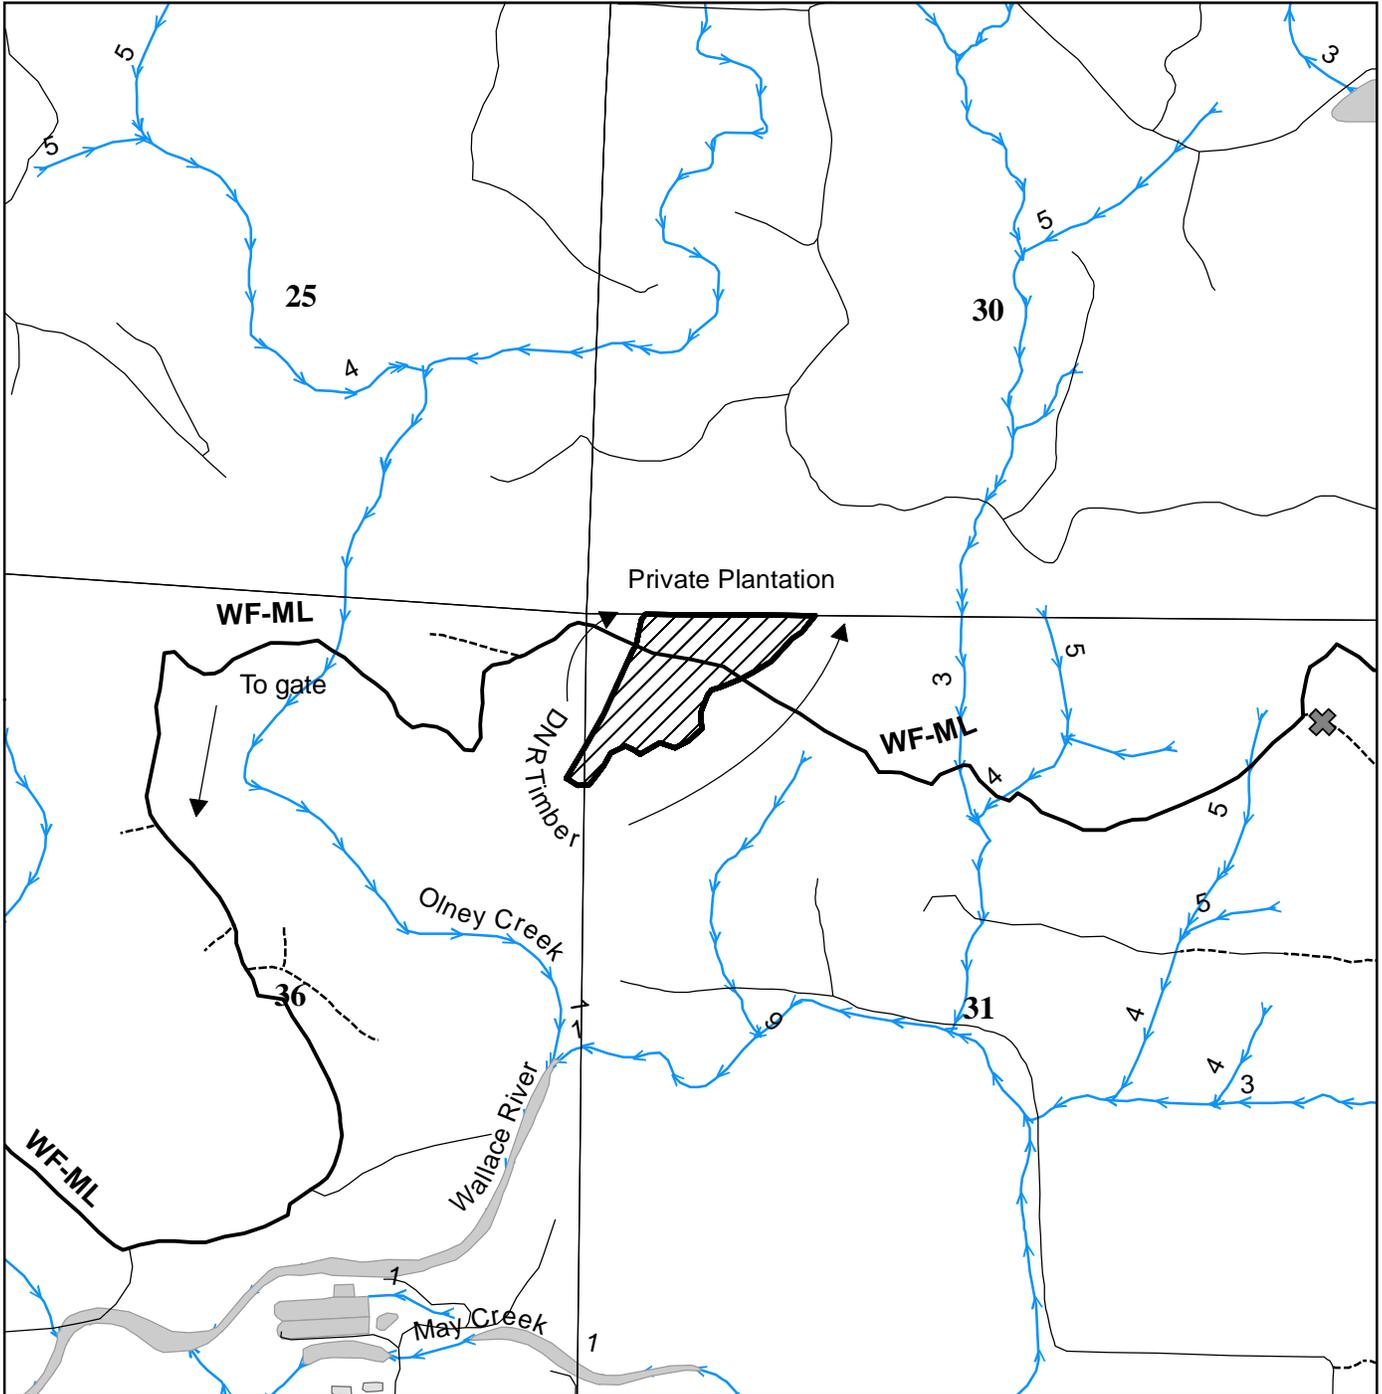

Treatment Area



Gate



Road




Closed Road



Unit Boundary




Tank Trap




Streams

Scale 1:12,000

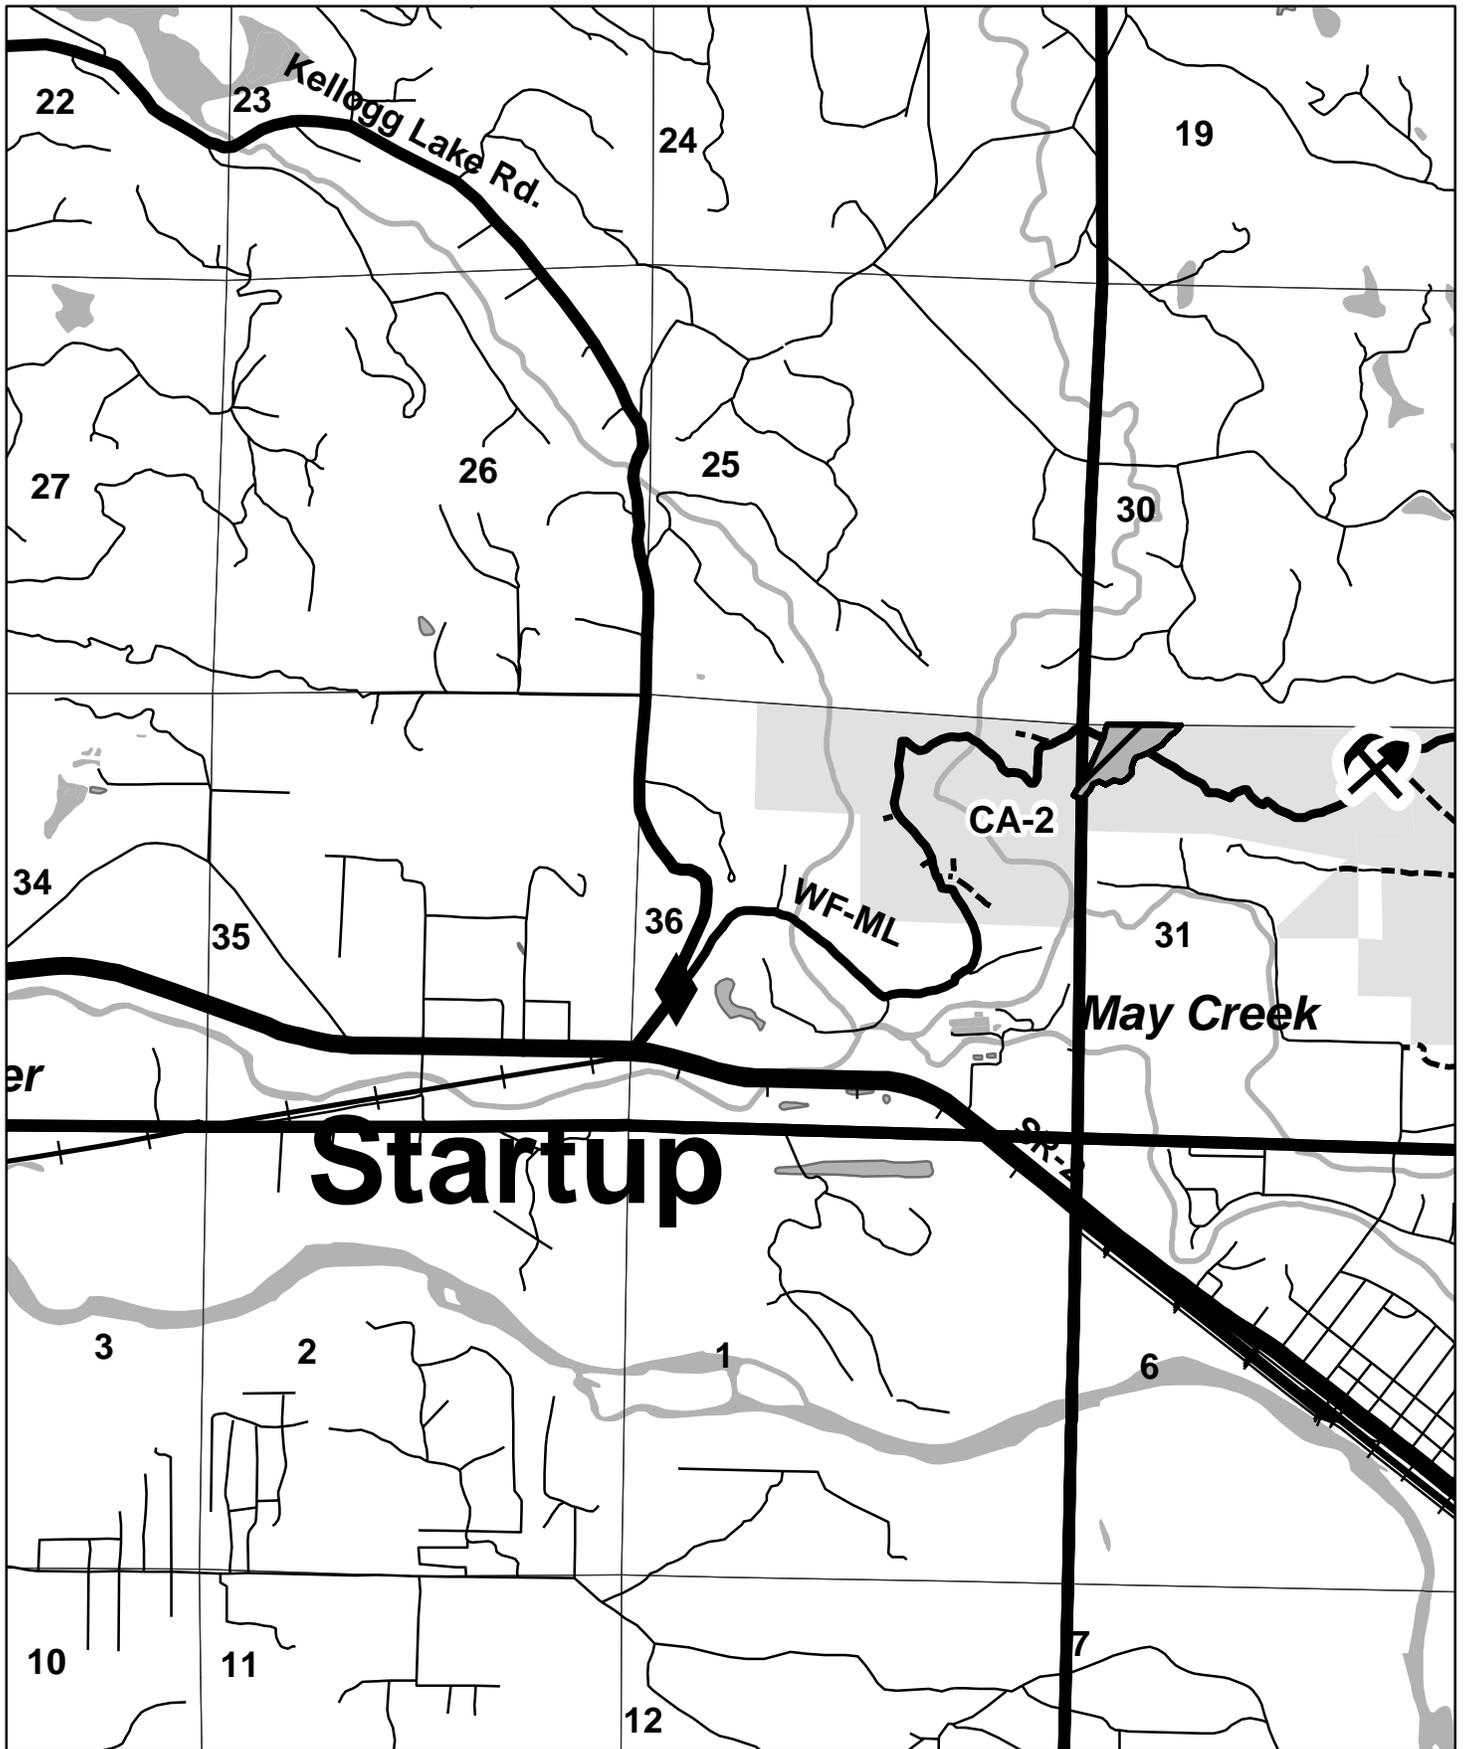

**Startup**

**VICINITY MAP**



-  Treatment Unit
-  Active Road
-  Gates
-  DNR-Managed Lands
-  Closed Road
-  Rockpits

## UNIT DESCRIPTION

### SITE PREP, GROUND HERBICIDE

**INVITATION TO BID # 1240**

**Region:** NORTHWEST

**District:** CASCADE

**Local:** BOULDER

**Unit Name:** Equinox U1

**Item Number:** 1

**Unit Number:** CA-3

**Section(s):** 20

**Township:** 27N

**Range:** 7E W.M.

**Trust:** 01

**Acres:** 35

**Total:** 35

### SPECIFICATIONS

**Contract Period:** August 3, 2009 - August 28, 2009

**Minimum Crew Size:** 8

**Boundaries:** All treatment areas are bounded by pink flagging.

**Buffer Zones:** No-spray 25-foot buffers will be applied to any flowing water not within timbered buffers.

**Vegetation To Be Treated:** All vegetation.

Product (Trade Name)	Active Ingredient (A.I.)	A.I. Concentration	Rate/Acre	Total Solution/Ac	Carrier	Marking Required
Accord Concentrate	Glyphosate	5.4 lbs/gal 53.8%	48 oz.	10 gallons	Water	Dye compatible with herbicide. Flag strip edges.
Chopper	Imazapyr	2.0 lbs/gal 27.6%	8 oz.			
Oust XP	Sulfometuron methyl	56.25% by weight	3 oz.			
Syltac, Phase or Dynamic	N/A	4 oz. Syltac or Phase 6 oz. Dynamic				

**Treatment Technique and Rate:** Ground broadcast, waving wand foliar application with backpack sprayers. Spray foliage till wet.

**Special Requirements:** Herbicide must be mixed on site in the presence of the DNR compliance representative. Applicator's equipment and application method must be in compliance with herbicide labels and Department of Agriculture regulations.

**GENERAL INFORMATION** – The following information is provided as a courtesy to bidders. This information is a general estimate and as such may not be accurate.

**Elevation:** 1101'-1338'

**Slope:** 4%-14%

**Aspect:** variable

**Access:** Follow SR 203 south from HWY 2 3.4 mile to High Rock RD. To Unit 1, Portions of Unit 2: Follow High Rock Rd 2.3 miles and turn left on Lake Fontel Rd. Follow Lake Fontel Rd 1.1 mi and turn left on PP-ML. Follow PP-ML 0.7 mi to Unit 1

**Additional Comments:** The unit is behind a locked gate. Please call the NW Region office for information.

**Nearest Hospital:** Valley General Hospital, 14701 179<sup>th</sup> ST SE, Monroe WA 360-794-7497

# UNIT MAP

## Ground Herbicide

Invitation to Bid No. 1240

Item No. 1

Unit No. CA-3

UNIT NAME: EQUINOX U1

FMU ID: 37530

TRUST: 01

ACRES: 35


REGION: NORTHWEST

DISTRICT: CASCADE

LOCAL: BOULDER

COUNTY: SNOHOMISH

T27N-R7E SEC 20

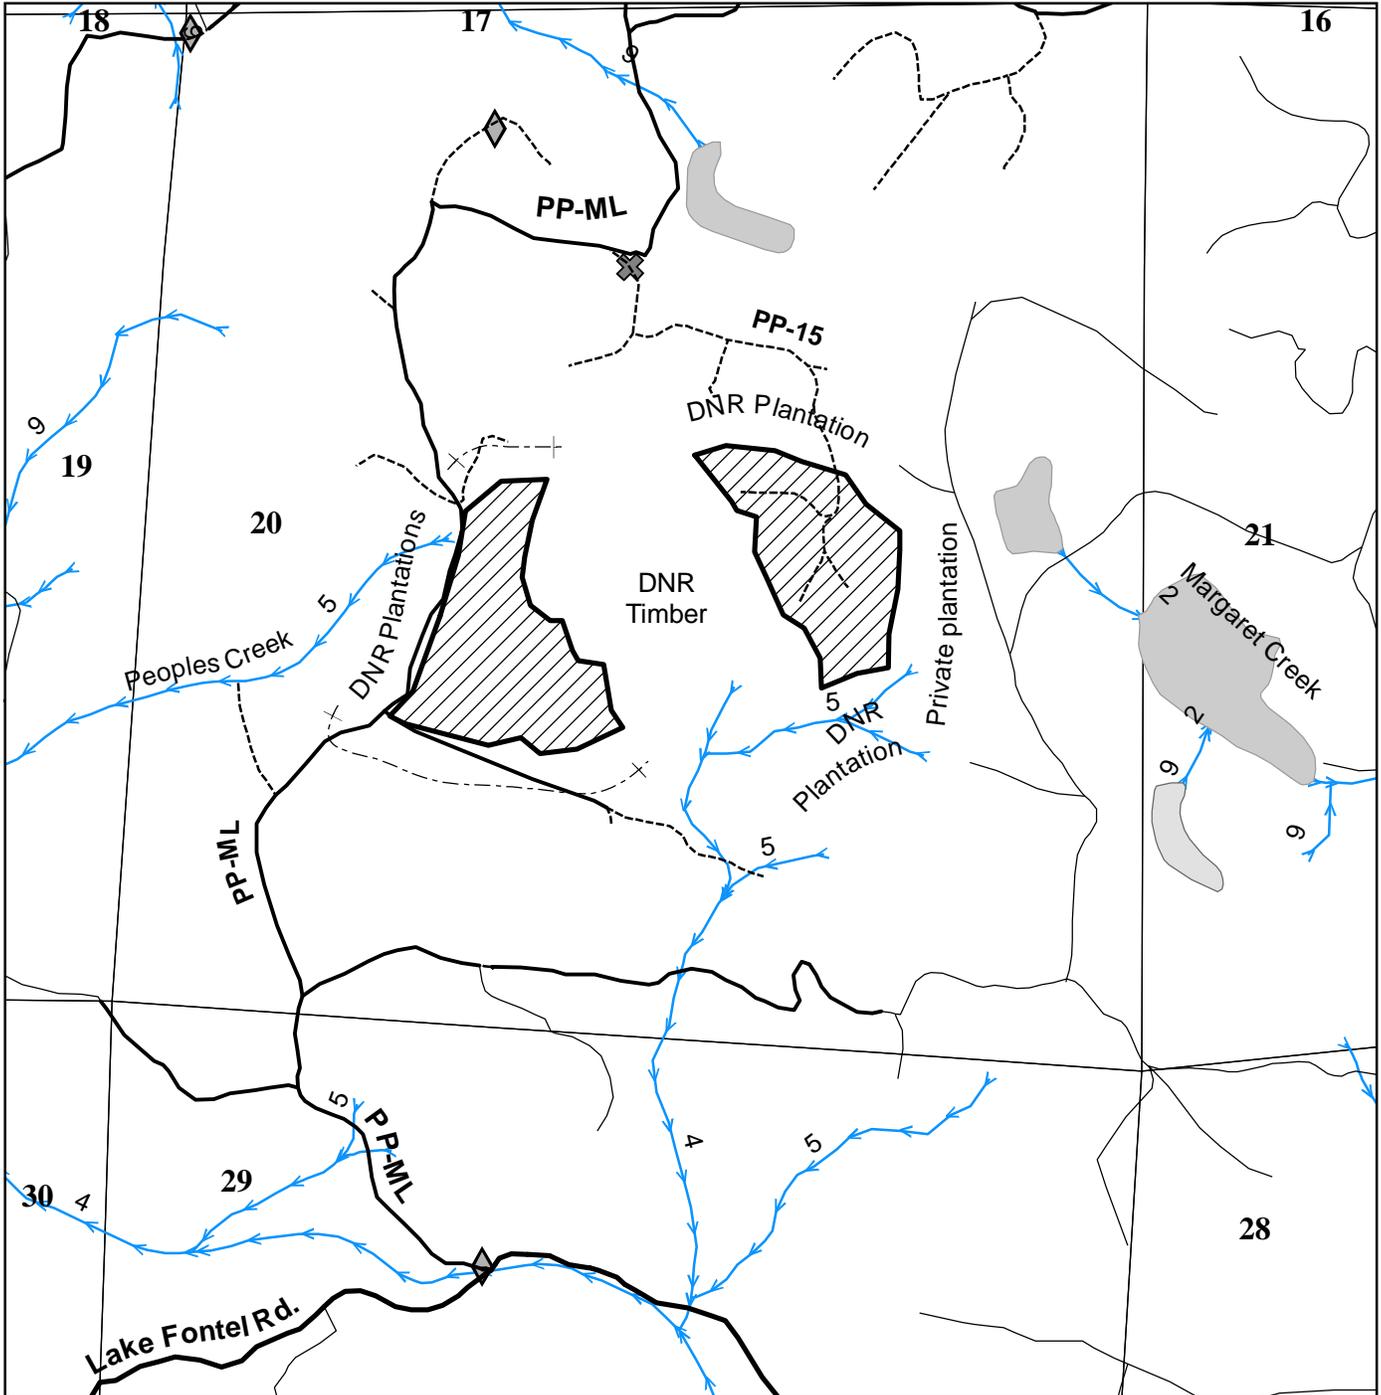

Treatment Area



Gate

Road


Closed Road

Unit Boundary

Tank Trap

Streams

Scale 1:12,000

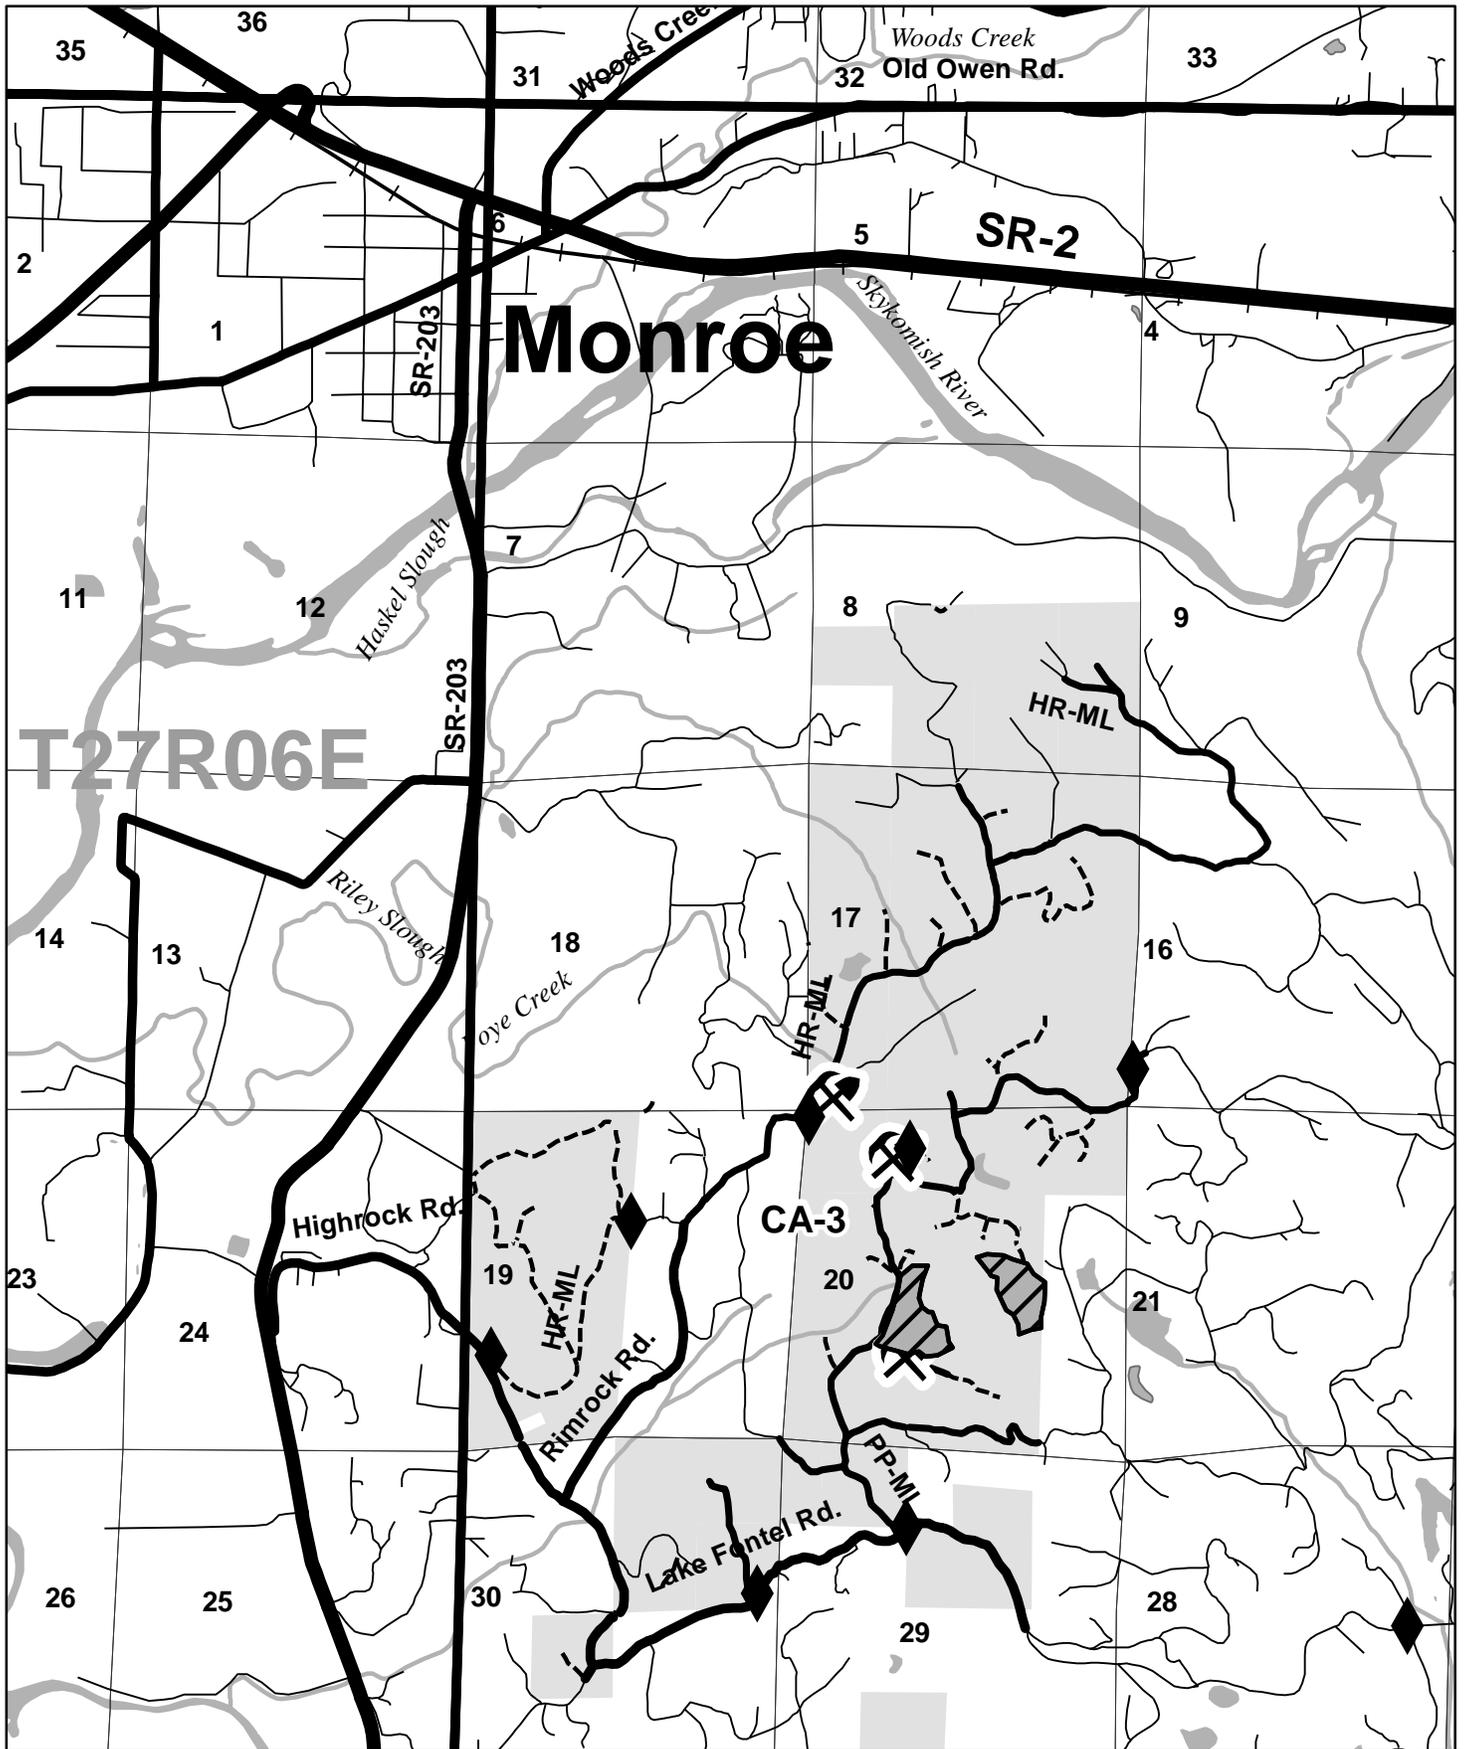

**VICINITY MAP**

- Treatment Unit
- Active Road
- Gates
- DNR-Managed Lands
- Closed Road
- Rockpits

**UNIT DESCRIPTION**

**SITE PREP, GROUND HERBICIDE**

**INVITATION TO BID # 1240**

**Region:** NORTHWEST

**District:** BAKER

**Local:** DEMING

**Unit Name:** Little Squirt 2

**Item Number:** 2

**Unit Number:** BK-1

**Section(s):** 33

**Township:** 40N

**Range:** 6E W.M.

**Trust:** 01

**Acres:** 40

**Section(s):** 33

**Township:** 40N

**Range:** 6E W.M.

**Trust:** 08

**Acres:** 9

**Total:** 49

**SPECIFICATIONS**

**Contract Period:** August 3 - September 4, 2009

**Minimum Crew Size:** 6

**Boundaries:** See unit map.

**Buffer Zones:** Avoid herbicide application in stream channels with water present.

**Vegetation To Be Treated:** Hardwoods, elderberry, slamonberry, blackberry, thimble berry and all new vegetation.

Product (Trade Name)	Active Ingredient (A.I.)	A.I. Concentration	Rate/Acre	Total Solution/Ac	Carrier	Marking Required
Accord Concentrate	Glyphosate	5.4 lbs/gal 53.8%	48 oz.	10 gallons	Water	Dye compatible with herbicide. Flag strip edges.
Chopper	Imazapyr	2.0 lbs/gal 27.6%	8 oz.			
Oust XP	Sulfometuron methyl	75% by weight	3 oz			
Syltac or Dynamic or Phase	N/A	4 oz Syltac or Phase 6 oz Dynamic				

**Treatment Technique and Rate:** Ground broadcast, waving wand foliar application with backpack sprayers. Spray foliage till wet.

**Special Requirements:** Herbicide must be mixed on site in the presence of the DNR compliance representative. Applicator's equipment and application method must be in compliance with herbicide labels and Department of Agriculture regulations.

**GENERAL INFORMATION** – The following information is provided as a courtesy to bidders. This information is a general estimate and as such may not be exact.

**Elevation:** 1,043 – 1,413 Ft.

**Slope:** 24% average

**Aspect:** SE

**Gate:** Yes

**Access:** From Deming travel 2.8 miles east on Hwy 542. Turn right on to the Mosquito Lake Road and travel 1 mile, and turn left on to the North Fork rd. and travel 2.4 miles to the end of the North Fork rd. which then turns into the S-1000 rd. Continue on the S-1000 5.8 miles to the gate, continue past the gate for 2.5 miles to the unit.


**Additional Comments:** Unit is behind a locked gate. Please contact the Northwest Region Office for gate information 360-856-3500. **All roads into unit have been abandoned.** Year Harvested 2008.

**Nearest Hospital:** St. Joseph Hospital, 2901 Squalicum Parkway, Bellingham, WA. Ph: (360) 734-5400

BK-1  
LITTLE SQUIRT 2  
49 ACRES

# UNIT MAP

Invitation to Bid Number 1240  
Item 2

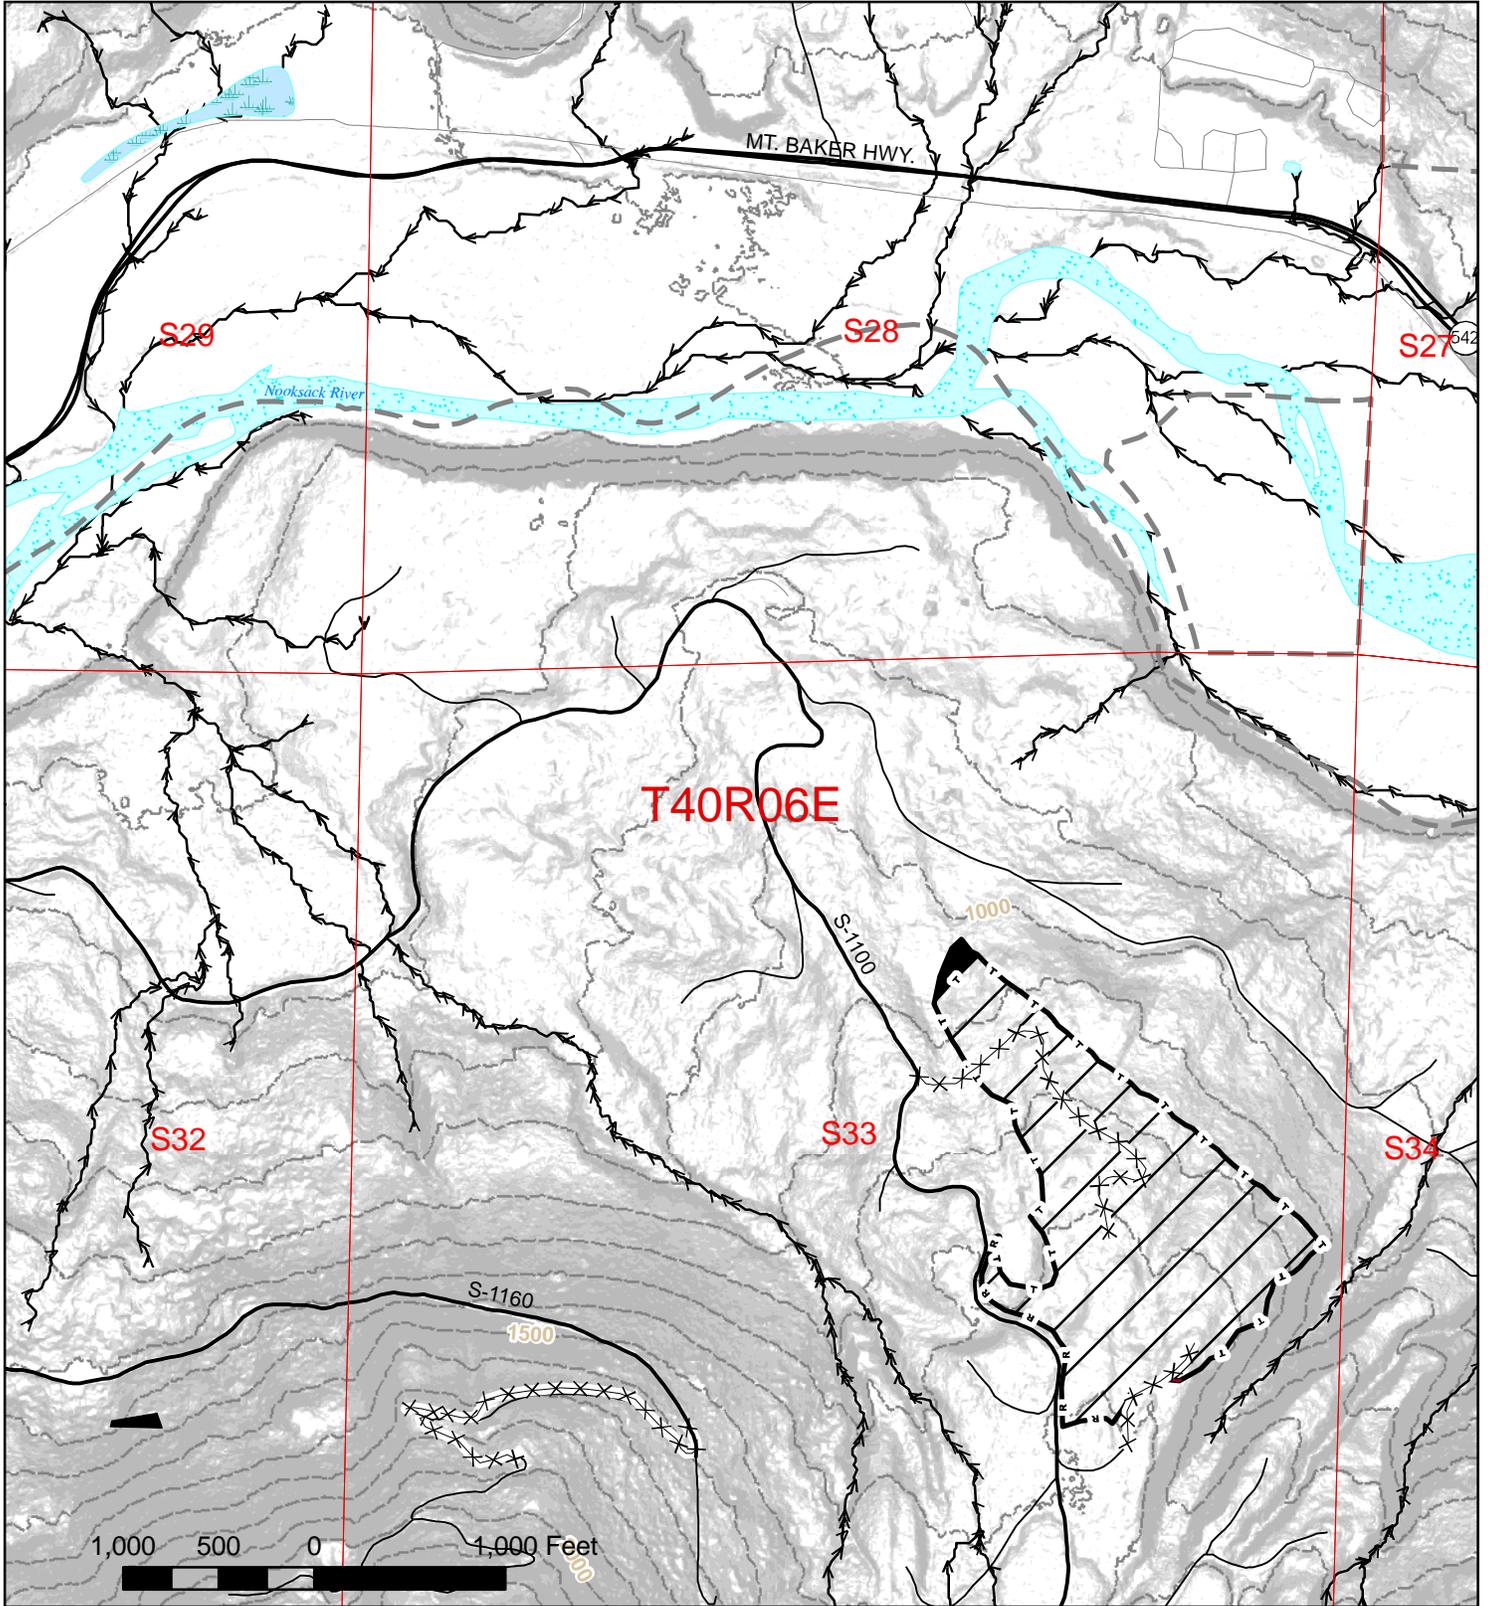

— Roads	Treatment Unit
***** Abandoned Road	DNR-Managed Lands
-T-T- Timber	-R-R- Road (unit boundary)
	-P-P- Plantation

# VICINITY MAP 1


## Invitation to Bid Number 1240

### Item 2



Northwest Region  
Baker District

BK-1 LITTLE SQUIRT 2

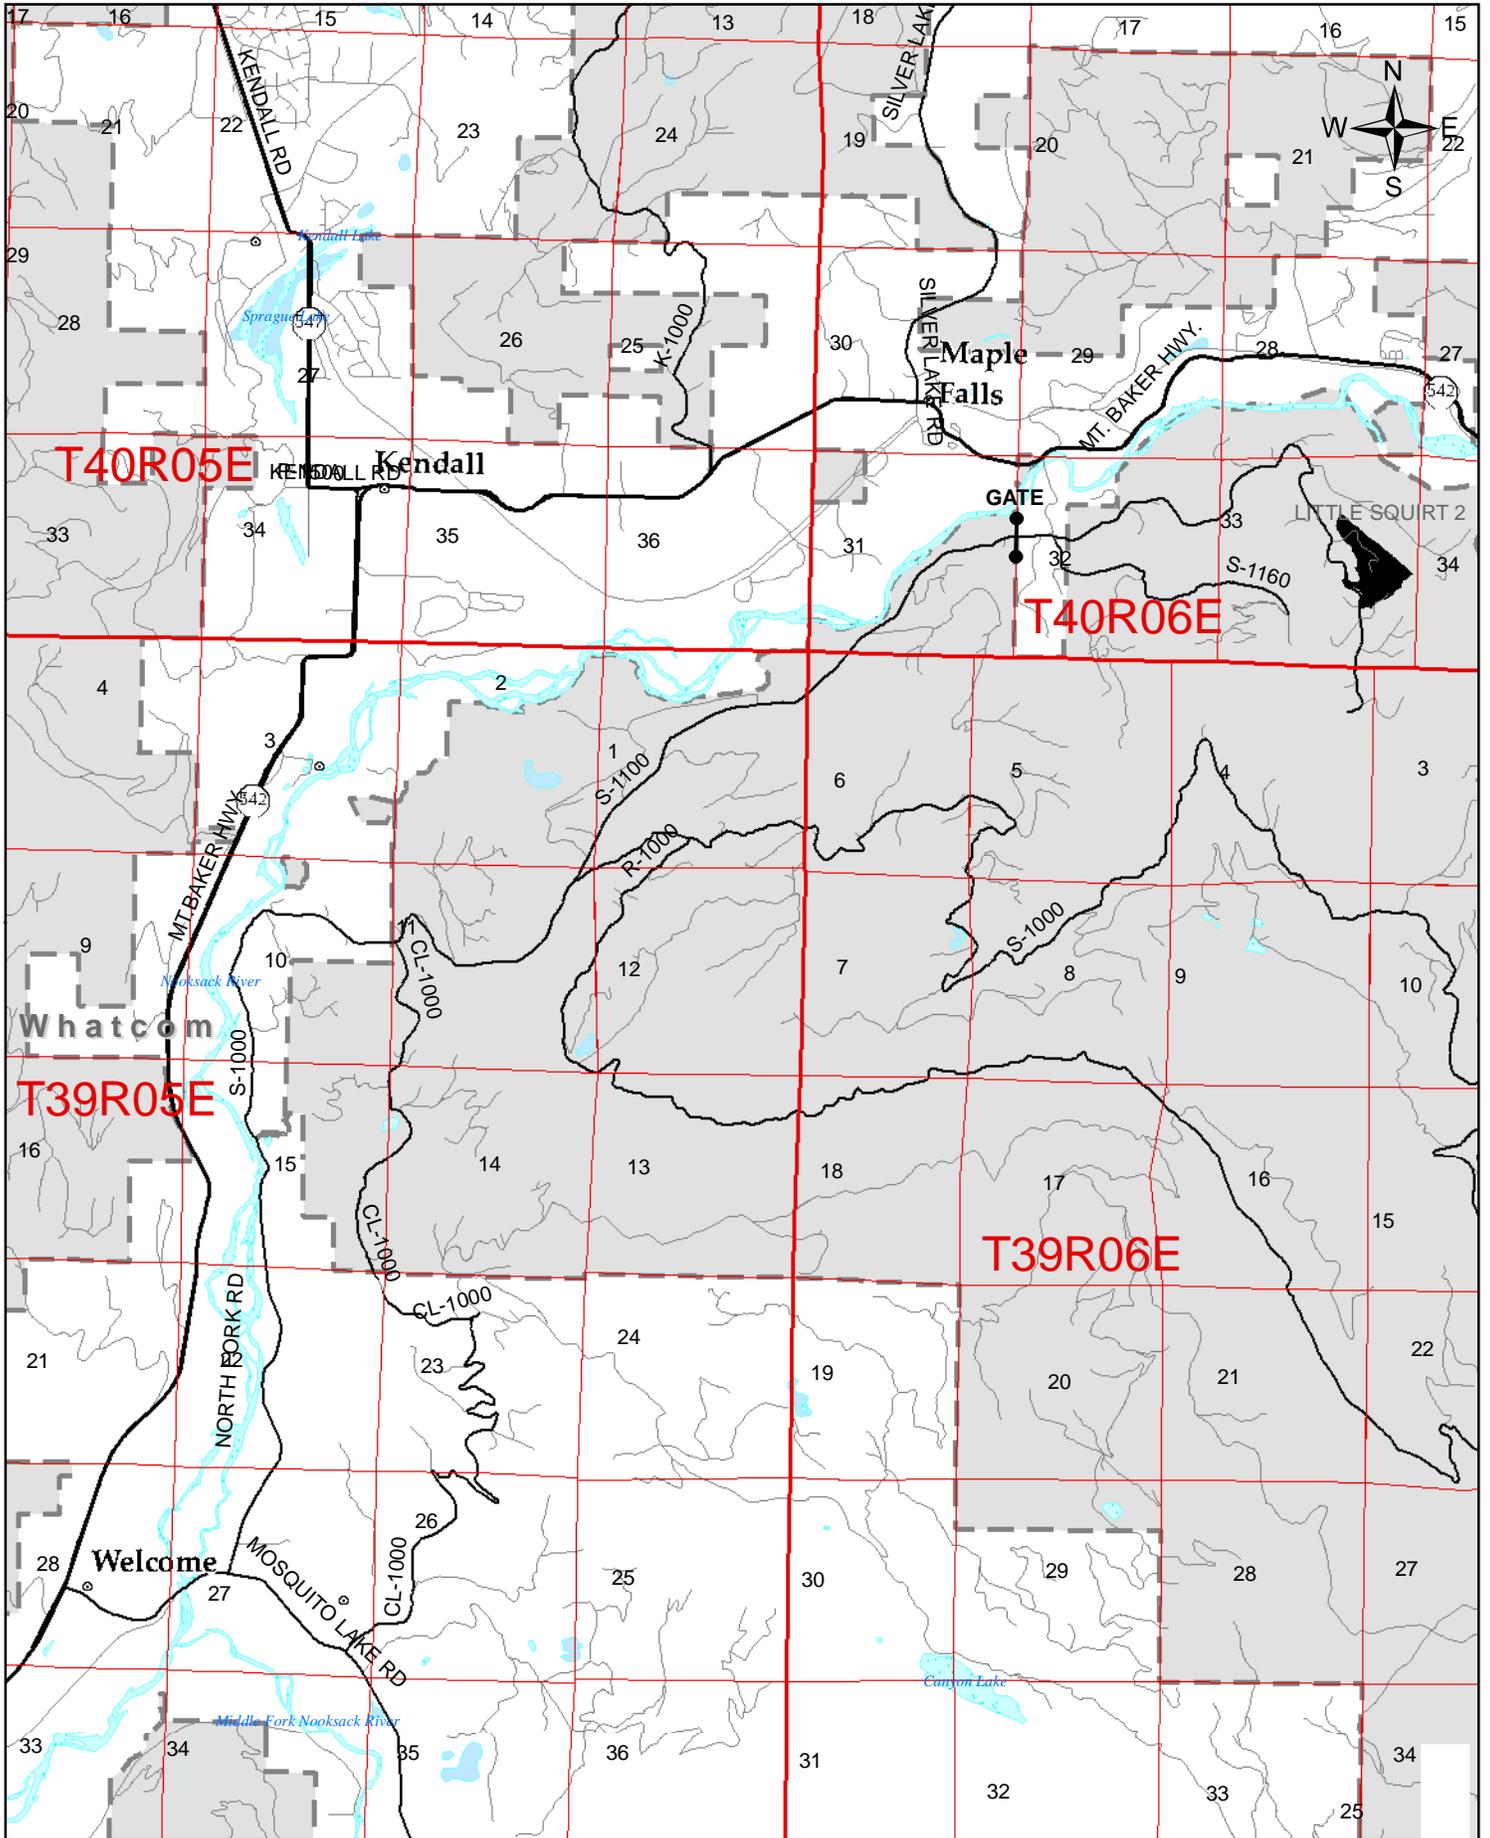

## UNIT DESCRIPTION

### SITE PREP, GROUND HERBICIDE

INVITATION TO BID # 1240

**Region:** NORTHWEST

**District:** BAKER

**Local:** DEMING

**Unit Name:** Southern Bell

**Item Number:** 2

**Unit Number:** BK-2

**Section(s):** 17

**Township:** 39N

**Range:** 5E W.M.

**Trust:** 10

**Acres:** 10

**Total:** 10

### SPECIFICATIONS

**Contract Period:** August 3 - September 4, 2009

**Minimum Crew Size:** 6

**Boundaries:** See unit map.

**Buffer Zones:** Avoid herbicide application in stream channels with water present.

**Vegetation To Be Treated:** Hardwoods, elderberry, slamonberry, blackberry, thimble berry and all new vegetation.

Product (Trade Name)	Active Ingredient (A.I.)	A.I. Concentration	Rate/Acre	Total Solution/Ac	Carrier	Marking Required
Accord Concentrate	Glyphosate	5.4 lbs/gal 53.8%	48 oz.	10 gallons	Water	Dye compatible with herbicide. Flag strip edges.
Chopper	Imazapyr	2.0 lbs/gal 27.6%	8 oz.			
Oust XP	Sulfometuron methyl	75% by weight	3 oz			
Syltac or Dynamic Or Phase	N/A	4 oz Syltac or Phase 6 oz Dynamic				

**Treatment Technique and Rate:** Ground broadcast, waving wand foliar application with backpack sprayers. Spray foliage till wet.

**Special Requirements:** Herbicide must be mixed on site in the presence of the DNR compliance representative. Applicator's equipment and application method must be in compliance with herbicide labels and Department of Agriculture regulations.

**GENERAL INFORMATION** – The following information is provided as a courtesy to bidders. This information is a general estimate and as such may not be exact.

**Elevation:** 1,300 – 1,940 Ft.

**Slope:** 57% Average

**Aspect:** S

**Gate:** Yes

**Access:** From Deming travel west on Hwy 542 (Mt. Baker Hwy) 2 miles and turn right on to the Hilliard rd. which turns into the P-1000 rd. at the end of the asphalt. Travel 1 mile up the P-1000 to the gate, continue past the gate on the P-1000 2.5 miles and turn right on to the P-1100 and go 2 miles and turn left on to the P-1170 and go 0.7 mile to the unit.


**Additional Comments:** Unit is behind a locked gate. Please contact the Northwest Region Office for gate information 360-856-3500. Year Harvested 2008.

**Nearest Hospital:** St. Joseph Hospital, 2901 Squalicum Parkway, Bellingham, WA. Ph: (360) 734-5400

BK-2  
SOUTHERN BELL  
10 ACRES

# UNIT MAP

Invitation to Bid Number 1240  
Item 2

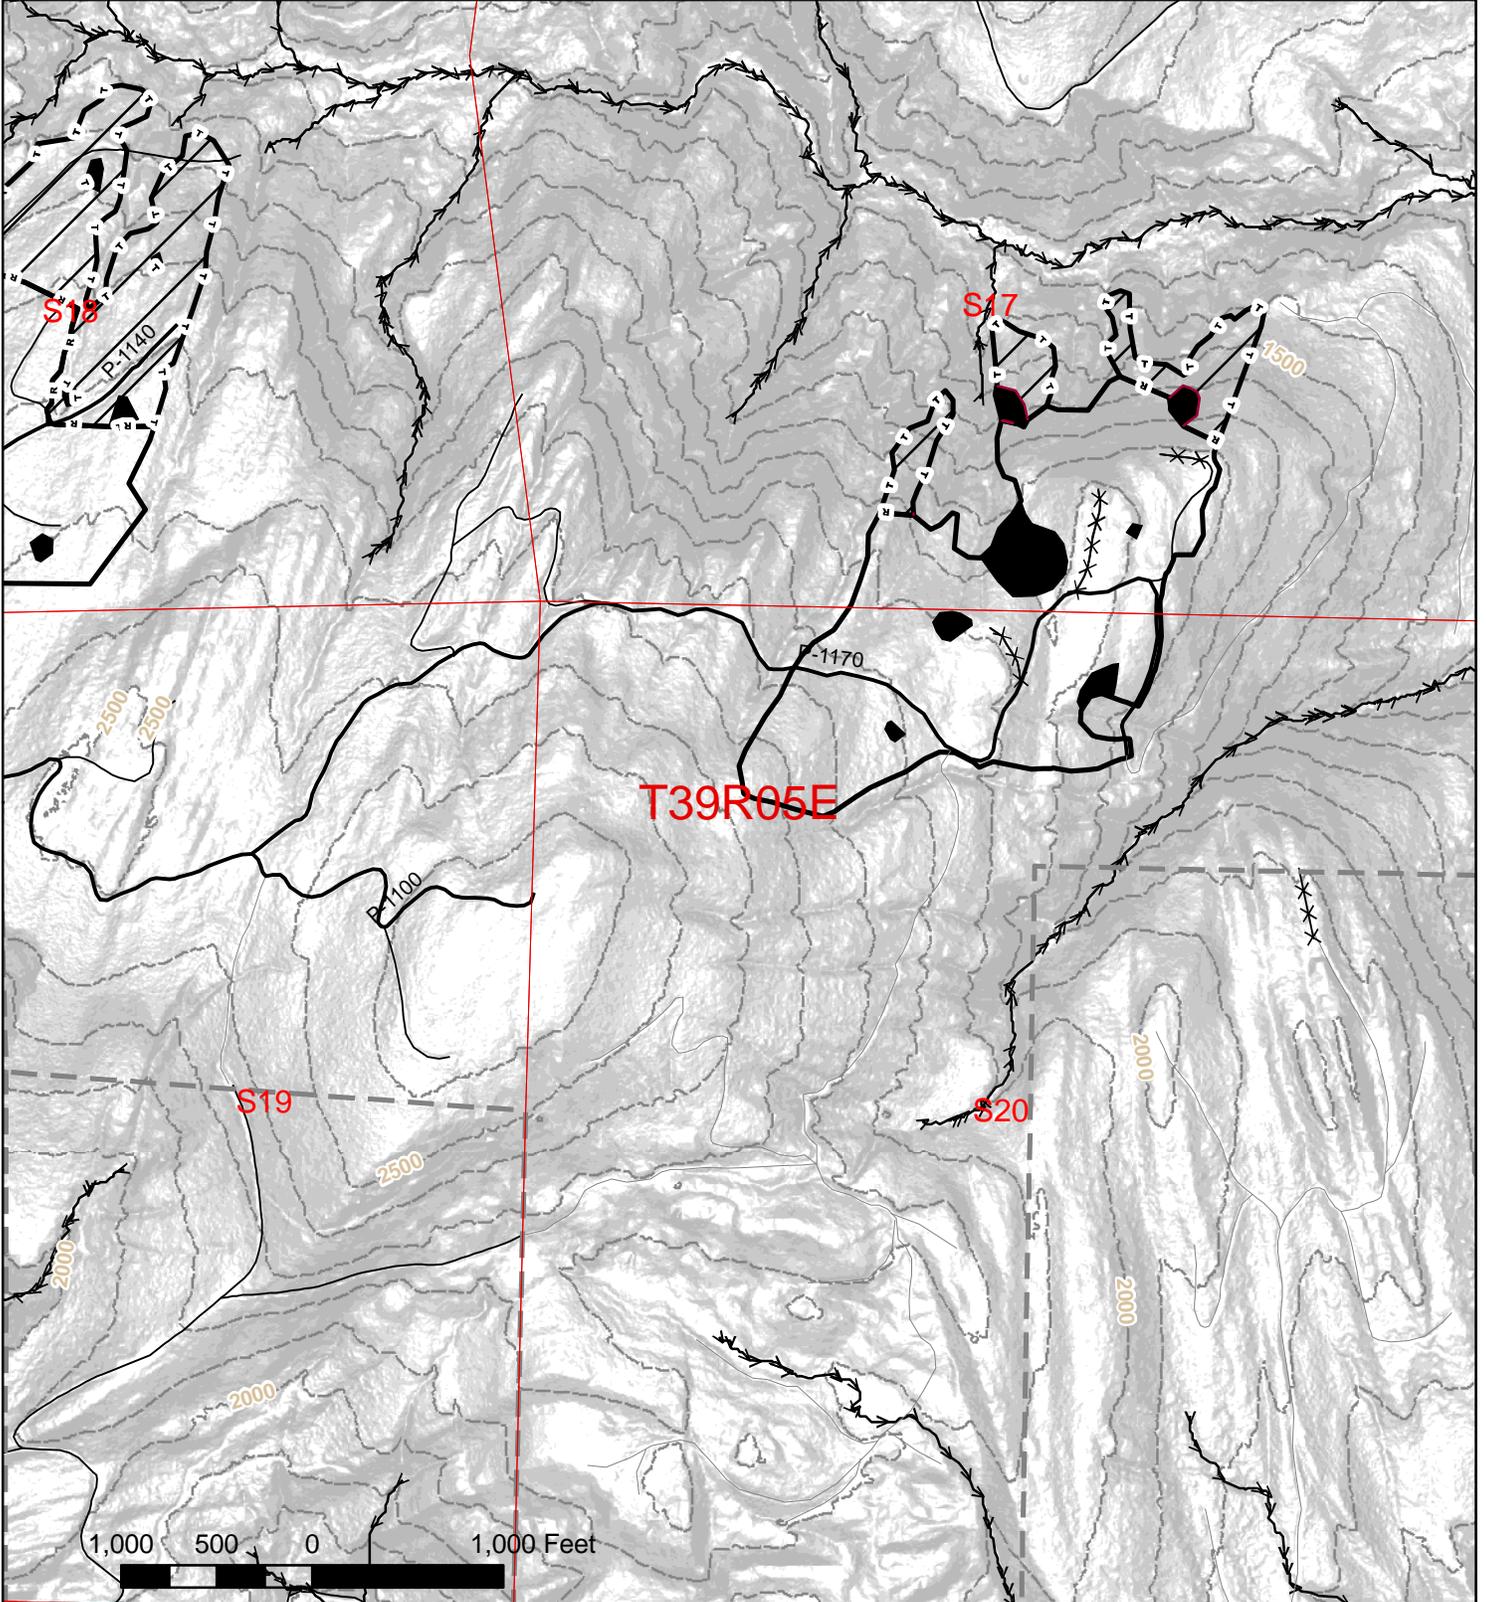

Roads	Treatment Unit	 27
Abandoned Road	DNR-Managed Lands	
Timber	Ribbon	

## UNIT DESCRIPTION

### SITE PREP, GROUND HERBICIDE

INVITATION TO BID # 1240

**Region:** NORTHWEST

**District:** BAKER

**Local:** DEMING

**Unit Name:** Williams Lake

**Item Number:** 2

**Unit Number:** BK-3

<b>Section(s):</b> 03	<b>Township:</b> 38N	<b>Range:</b> 5E W.M.	<b>Trust:</b> 01	<b>Acres:</b> 1
<b>Section(s):</b> 10	<b>Township:</b> 38N	<b>Range:</b> 5E W.M.	<b>Trust:</b> 01	<b>Acres:</b> 47
<b>Section(s):</b> 09	<b>Township:</b> 38N	<b>Range:</b> 5E W.M.	<b>Trust:</b> 01	<b>Acres:</b> 27
<b>Total:</b>				<b>75</b>

### SPECIFICATIONS

**Contract Period:** August 3 - September 4, 2009

**Minimum Crew Size:** 6

**Boundaries:** See unit map.

**Buffer Zones:** Avoid herbicide application in stream channels with water present.

**Vegetation To Be Treated:** Hardwoods, elderberry, slamonberry, blackberry, thimble berry and all new vegetation.

Product (Trade Name)	Active Ingredient (A.I.)	A.I. Concentration	Rate/ Acre	Total Solution/Ac	Carrier	Marking Required
Accord Concentrate	Glyphosate	5.4 lbs/gal 53.8%	48 oz.	10 gallons	Water	Dye compatible with herbicide. Flag strip edges.
Chopper	Imazapyr	2.0 lbs/gal 27.6%	8 oz.			
Oust XP	Sulfometuron methyl	75% by weight	3 oz			
Syltac or Dynamic Or Phase	N/A	4 oz Syltac or Phase 6 oz Dynamic				

**Treatment Technique and Rate:** Ground broadcast, waving wand foliar application with backpack sprayers. Spray foliage till wet.

**Special Requirements:** Herbicide must be mixed on site in the presence of the DNR compliance representative. Applicator's equipment and application method must be in compliance with herbicide labels and Department of Agriculture regulations.

**GENERAL INFORMATION** – The following information is provided as a courtesy to bidders. This information is a general estimate and as such may not be exact.

**Elevation:** 590 – 1,750 Ft.      **Slope:** 41% Average      **Aspect:** W      **Gate:** Yes

**Access:** From the intersection of Hwy 9 and Hwy 20 go north on Hwy 9, 21.5 miles and turn right on to the Rutsatz rd. travel 2.3 miles on the Rutsatz rd. and turn right on to the WI-ML and travel 1.2 miles. The abandoned road to the right is the WI-13. Walk the WI-13 into the unit.


**Additional Comments:** Unit is behind a locked gate. **All road in unit is abandoned.** Please contact the Northwest Region Office for gate information 360-856-3500. Harvest Year 2008.

**Nearest Hospital:** St. Joseph Hospital, 2901 Squalicum Parkway, Bellingham, WA. PH: (360) 734- 5400

BK-3  
WILLIAMS LAKE  
75 ACRES

# UNIT MAP

Invitation to Bid Number 1240  
Item 2

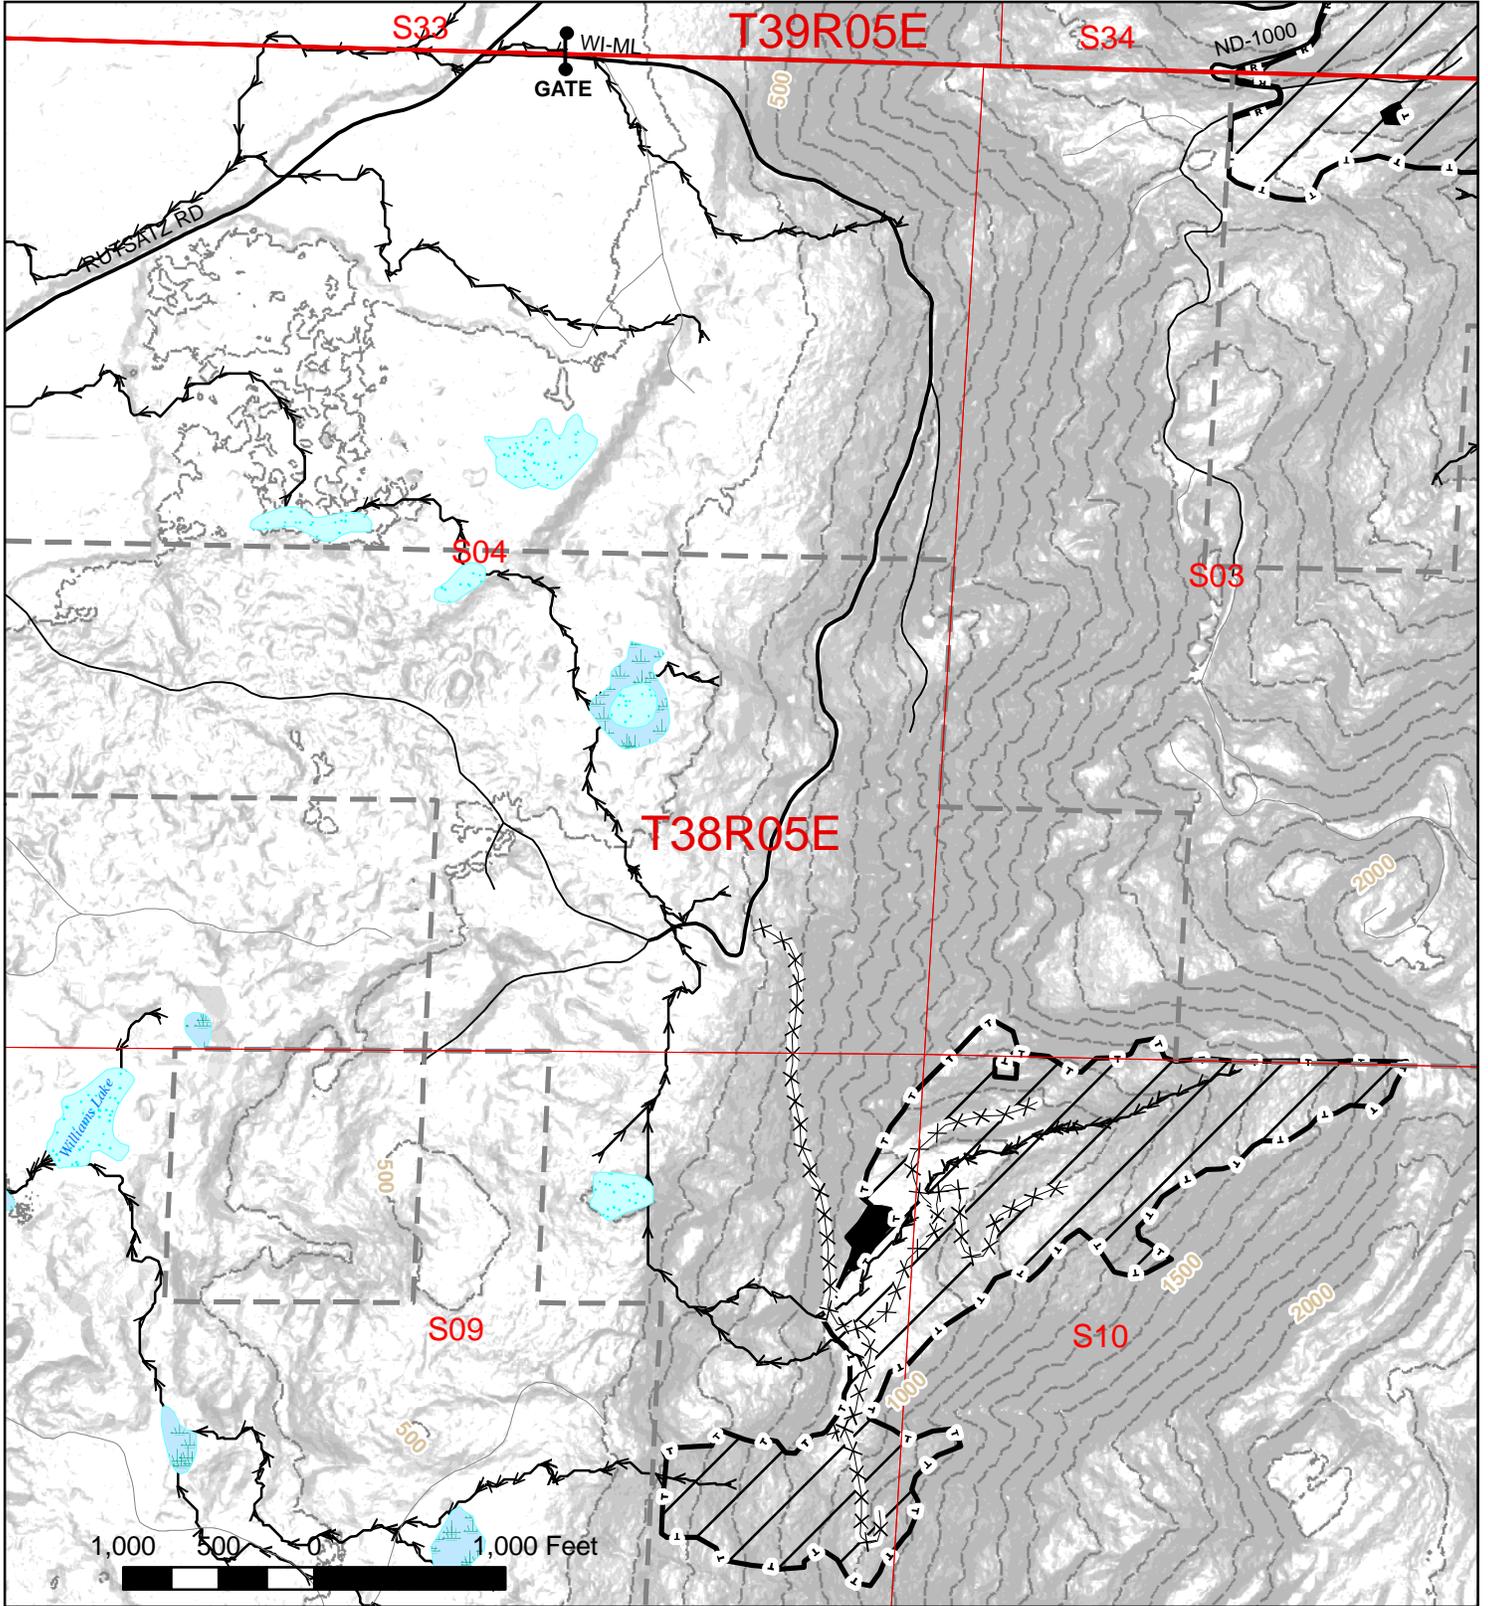

Roads	Treatment Unit	 N W E S 29
Abandoned Road	DNR-Managed Lands	
Timber		

**UNIT DESCRIPTION**

**SITE PREP, GROUND HERBICIDE**

**INVITATION TO BID # 1240**

**Region:** NORTHWEST

**District:** BAKER

**Local:** DEMING

**Unit Name:** Bench Top

**Item Number:** 2

**Unit Number:** BK-4

**Section(s):** 02

**Township:** 37N

**Range:** 5E W.M.

**Trust:** 01

**Acres:** 28

**Total:** 28

**SPECIFICATIONS**

**Contract Period:** August 3 - September 4, 2009

**Minimum Crew Size:** 6

**Boundaries:** See unit map.

**Buffer Zones:** Avoid herbicide application in stream channels with water present.

**Vegetation To Be Treated:** Hardwoods, elderberry, slamonberry, blackberry, thimble berry and all new vegetation.

Product (Trade Name)	Active Ingredient (A.I.)	A.I. Concentration	Rate/Acre	Total Solution/Ac	Carrier	Marking Required
Accord Concentrate	Glyphosate	5.4 lbs/gal 53.8%	48 oz.	10 gallons	Water	Dye compatible with herbicide. Flag strip edges.
Chopper	Imazapyr	2.0 lbs/gal 27.6%	8 oz.			
Oust XP	Sulfometuron methyl	75% by weight	3 oz			
Syltac or Dynamic Or Phase	N/A	4 oz Syltac or Phase 6 oz Dynamic				

**Treatment Technique and Rate:** Ground broadcast, waving wand foliar application with backpack sprayers. Spray foliage till wet.

**Special Requirements:** Herbicide must be mixed on site in the presence of the DNR compliance representative. Applicator’s equipment and application method must be in compliance with herbicide labels and Department of Agriculture regulations.

**GENERAL INFORMATION** – The following information is provided as a courtesy to bidders. This information is a general estimate and as such may not be accurate.

**Elevation:** 1,250 – 2,010 Ft.      **Slope:** 47% Average      **Aspect:** NW      **Gate:** Yes

**Access:** From Mosquito Lake Rd at Acme, drive 4.2 miles and turn right onto the JP - 1000 Rd which has a locked gate. Continue on the JP – 1000 for 1.7 miles and turn right onto the 6000 Rd. Continue on the 6000 Rd for approximately 0.9 miles to the 6300 Rd. Turn right onto the 6300 and travel 1.4 miles to where the road is abandoned. An additional walk-in of 0.1 miles will be required to reach the beginning of the unit. The upper portion of the main unit can be accessed from the 6302 Rd. On the 6300, turn left onto the 6302 0.2 miles passed the junction with the 6000 Rd and follow the 6302 0.9 miles to the junction with 6303 Rd. Continue on the 6302 for 0.4 miles to where the road is abandoned. An additional 0.1 mile walk is required to reach the unit. To get to the SE portion of the unit, follow the 6303 for 1.1 miles to the 6304 and turn right. Follow the 6304 for 0.5 miles to the end of the road. The unit is accessed by walking north across a private plantation.


**Additional Comments:** Unit is behind a locked gate. Please contact the Northwest Region Office for gate information 360-856-3500. **All roads within the unit have been abandoned.** Year Harvested 2008.

**Nearest Hospital:** United General Hospital, 1971 Highway 20, Sedro Woolley, WA. Ph: (360) 856-6021

BK- 4  
BENCH TOP  
28 ACRES

# UNIT MAP

## Invitation to Bid Number 1240 Item 2

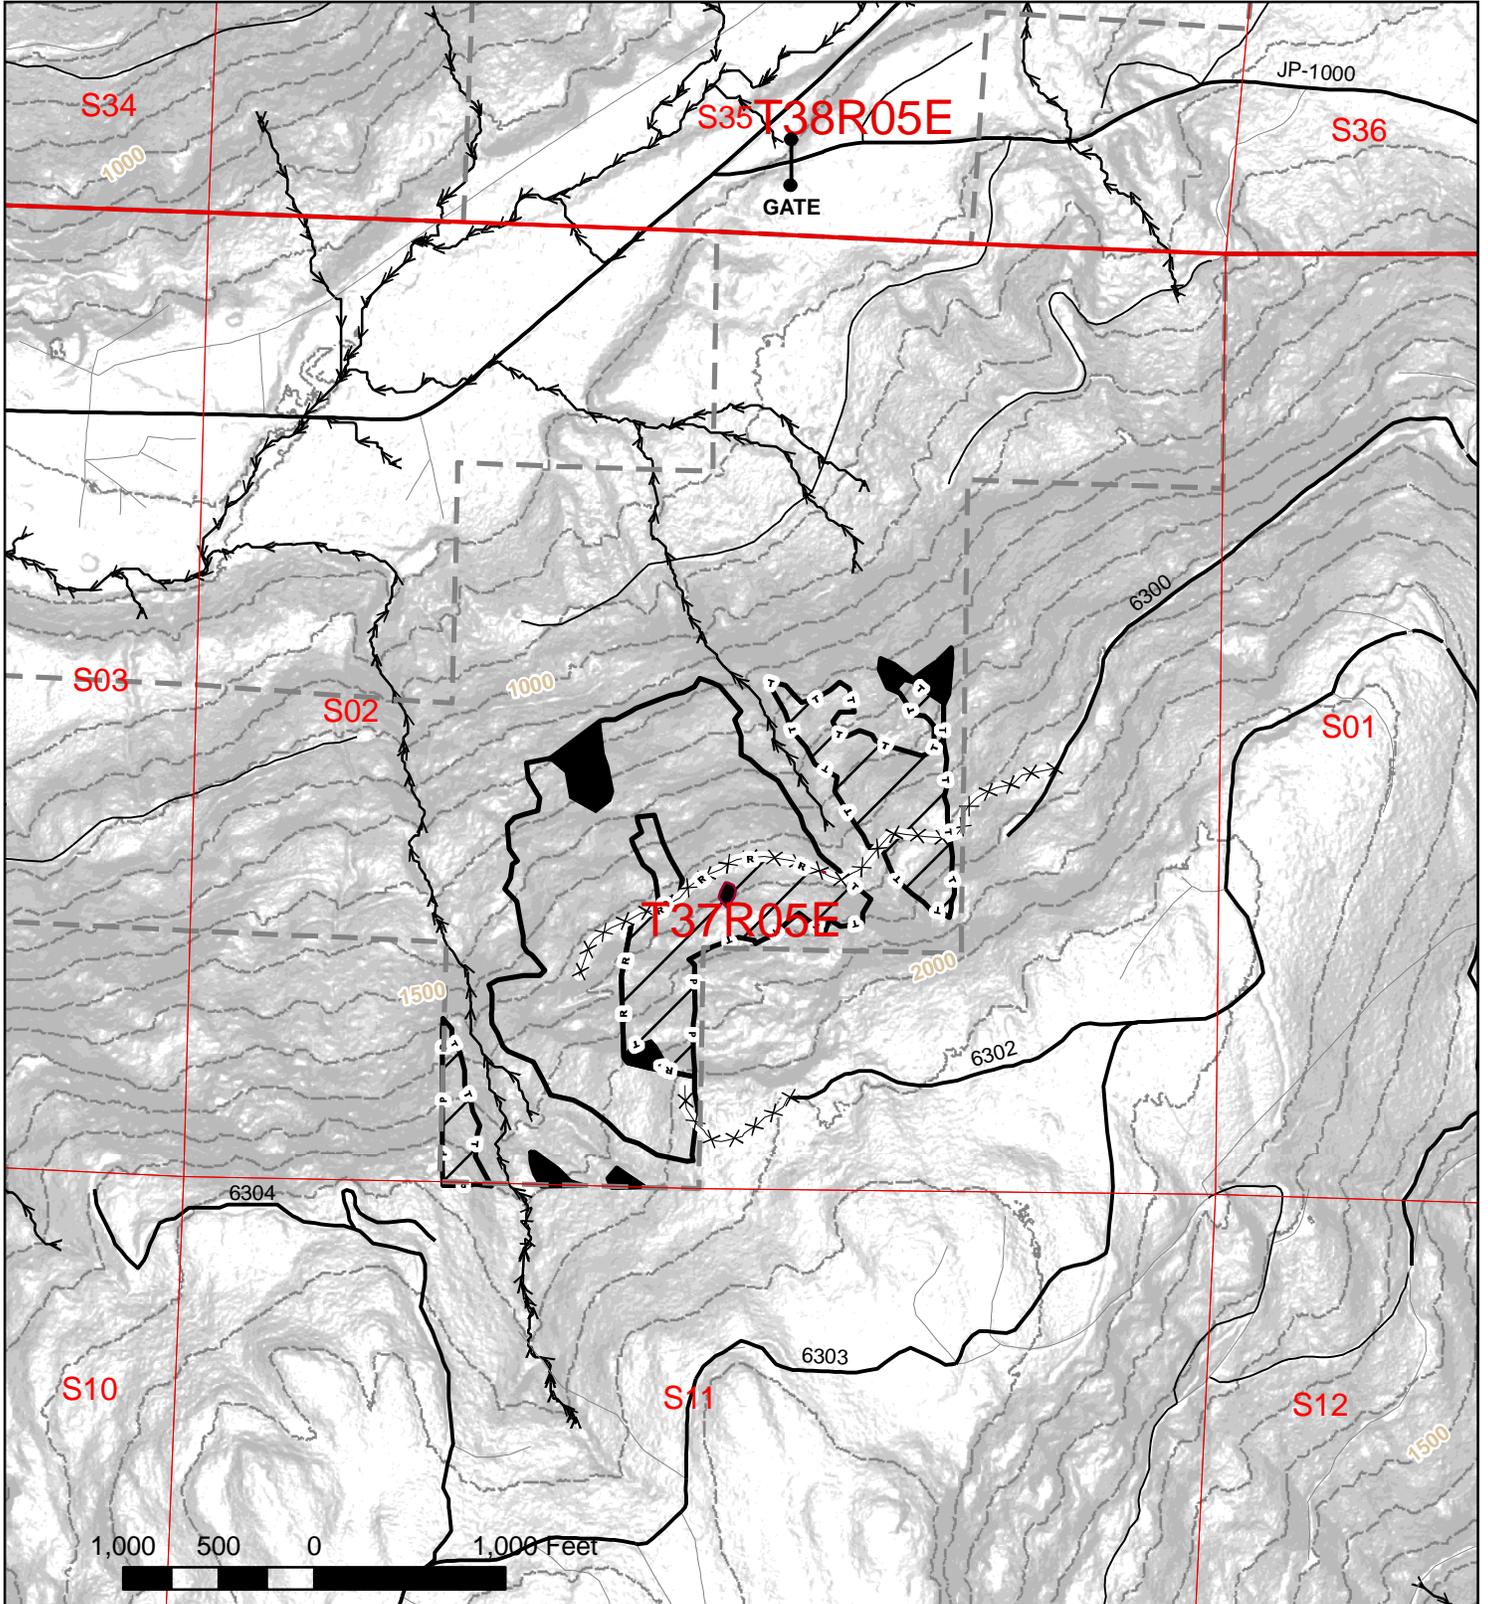

Roads	Treatment Unit
Abandoned Road	DNR-Managed Lands
Timber	Plantation
Ribbon/Road	

31

**UNIT DESCRIPTION**

**SITE PREP, GROUND HERBICIDE**

**INVITATION TO BID # 1240**

**Region:** NORTHWEST

**District:** BAKER

**Local:** HAMILTON

**Unit Name:** Median 3 & Apple Pie 1

**Item Number:** 2

**Unit Number:** BK-5

**Section(s):** 18

**Township:** 37N

**Range:** 5E W.M.

**Trust:** 01

**Acres:** 30

**Total:** 30

**SPECIFICATIONS**

**Contract Period:** August 3 - September 4, 2009

**Minimum Crew Size:** 6

**Boundaries:** See unit map.

**Buffer Zones:** No-spray 25-foot buffers will be applied to any flowing water not within timbered buffers.

**Vegetation To Be Treated:** Hardwoods, elderberry, salmonberry, blackberry, thimbleberry, and all new vegetation.

Product (Trade Name)	Active Ingredient (A.I.)	A.I. Concentration	Rate/Acre	Total Solution/Ac	Carrier	Marking Required
Accord Concentrate	Glyphosate	5.4 lbs/gal 53.8%	48 oz.	10 gallons	Water	Dye compatible with herbicide. Flag strip edges.
Chopper	Imazapyr	2.0 lbs/gal 27.6%	8 oz.			
Oust Extra	Sulfometuron methyl	56.25% by weight	4 oz.			
	Metsulfuron methyl	15.00% by weight				
Syltac or Dynamic Phase	N/A	4 oz. Syltac or Phase 6 oz. Dynamic				

**Treatment Technique and Rate:** Ground broadcast, waving wand foliar application with backpack sprayers. Spray foliage till wet.

**Special Requirements:** Herbicide must be mixed on site in the presence of the DNR compliance representative. Applicator's equipment and application method must be in compliance with herbicide labels and Department of Agriculture regulations.

**GENERAL INFORMATION** – The following information is provided as a courtesy to bidders. This information is a general estimate and as such may not be accurate.

**Elevation:** 1216 - 1670Ft.

**Slope:** 23% Average

**Aspect:** E

**Gate:** Yes

**Access:** From Sedro-Woolley, travel 12.5 miles north on highway 9 and turn left onto the CC-ML. Go through the locked gate and continue up the CC-ML for 1.7 miles. Turn right onto the CC-14. Follow the CC-14 for 0.4 miles to unit.


**Additional Comments:** Unit is behind a locked gate please call the NW Region office for gate information. Year harvested 2008.

**Nearest Hospital:** United General Hospital, 1971 Highway 20, Sedro Woolley, WA.( 360) 856-6021

BK- 5  
 MEDIAN 3/APPLE PIE 1  
 30 ACRES

# UNIT MAP

Invitation to Bid Number 1240  
 Item 2

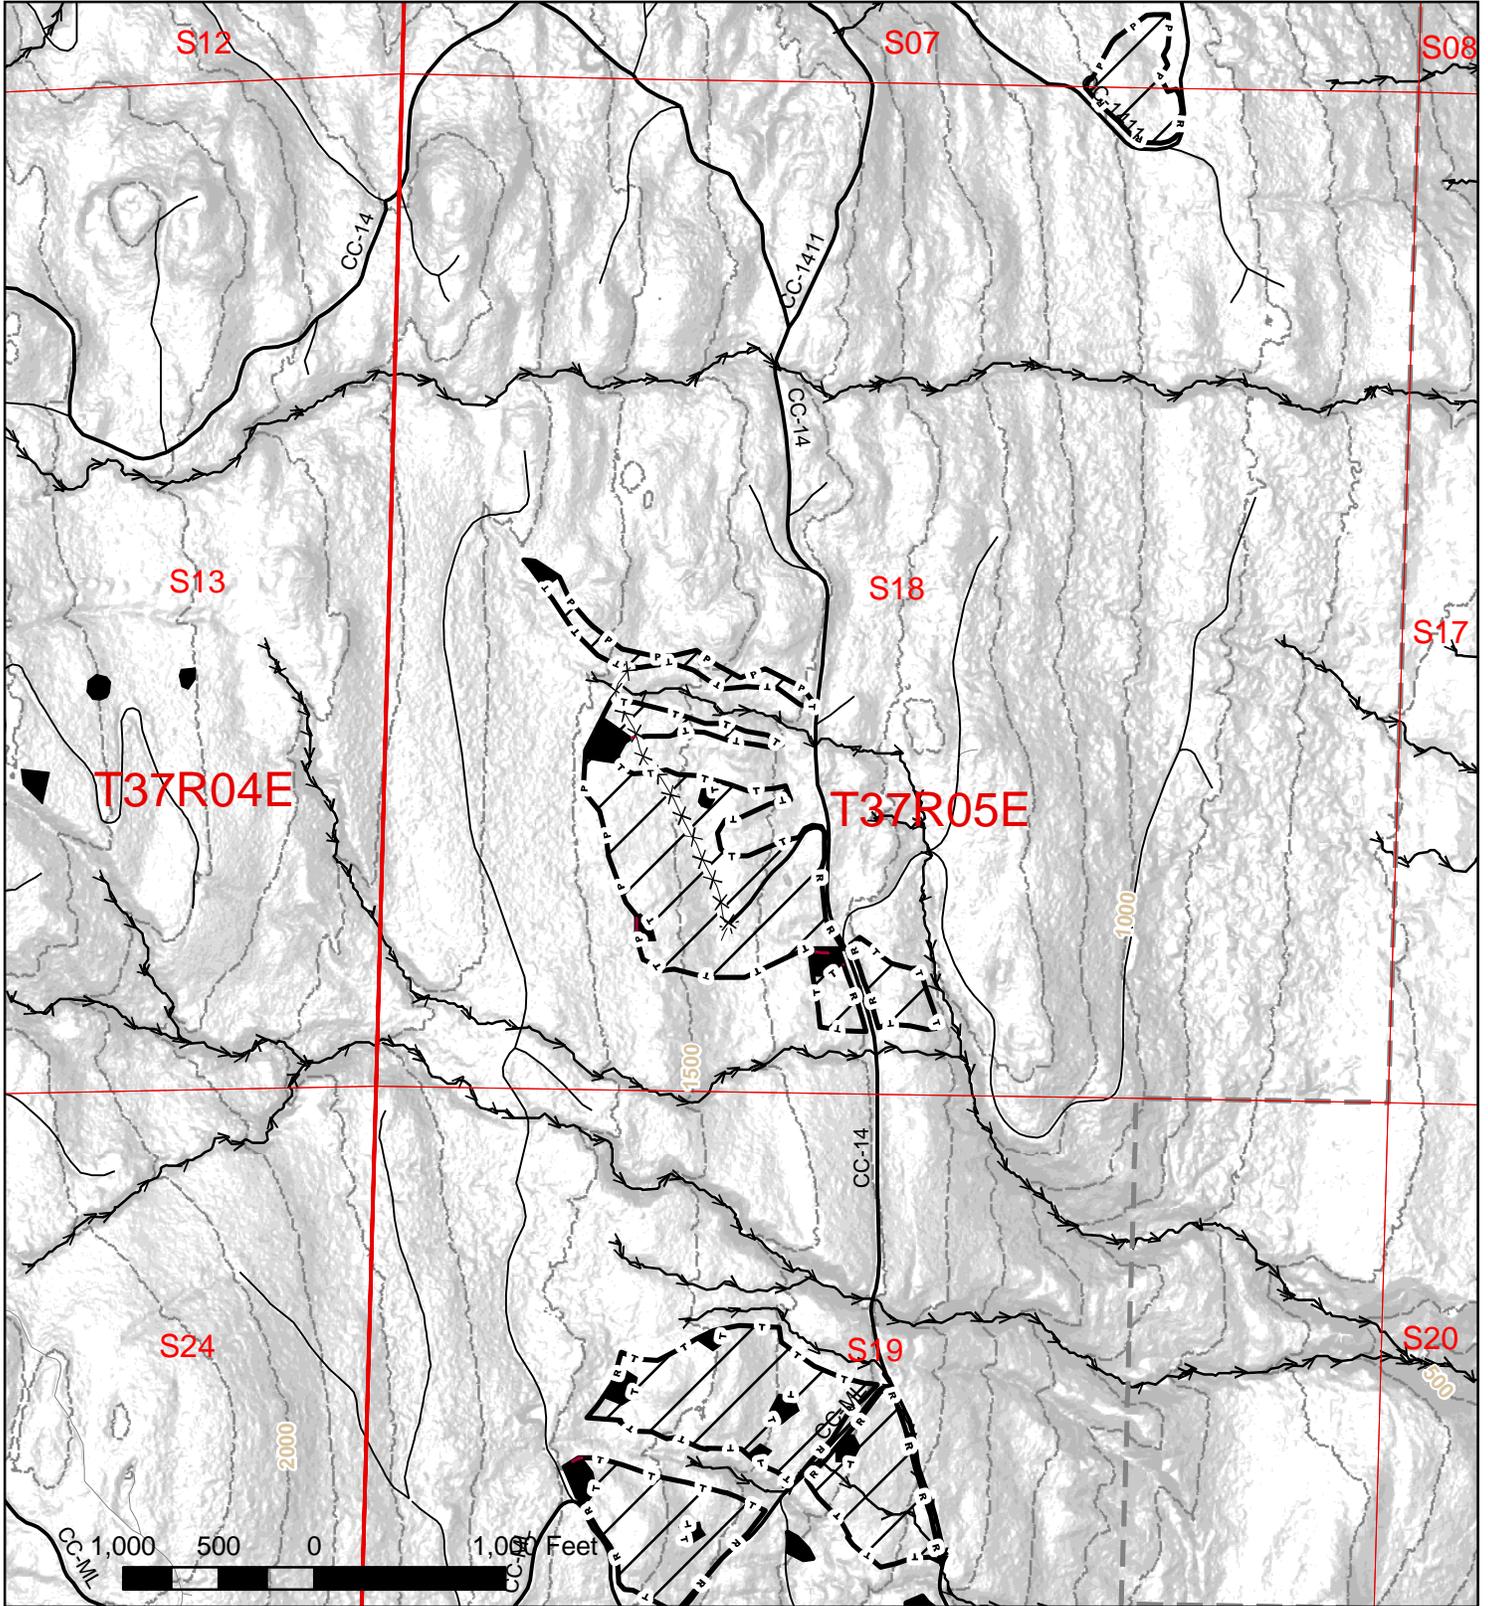

Roads	Treatment Unit	 33 S
Abandoned Road	DNR-Managed Lands	
Timber	Plantation	
Roads(Unit Boundary)		

**UNIT DESCRIPTION**

**SITE PREP, GROUND HERBICIDE**

**INVITATION TO BID # 1240**

**Region:** NORTHWEST

**District:** BAKER

**Local:** HAMILTON

**Unit Name:** Apple Pie 2

**Item Number:** 2

**Unit Number:** BK-6

**Section(s):** 18

**Township:** 37N

**Range:** 5E W.M.

**Trust:** 01

**Acres:** 5

**Total:** 5

**SPECIFICATIONS**

**Contract Period:** August 3 - September 4, 2009

**Minimum Crew Size:** 6

**Boundaries:** See unit map.

**Buffer Zones:** No-spray 25-foot buffers will be applied to any flowing water not within timbered buffers.

**Vegetation To Be Treated:** Hardwoods, elderberry, salmonberry, blackberry, thimbleberry, and all new vegetation.

Product (Trade Name)	Active Ingredient (A.I.)	A.I. Concentration	Rate/Acre	Total Solution/Ac	Carrier	Marking Required
Accord Concentrate	Glyphosate	5.4 lbs/gal 53.8%	48 oz.	10 gallons	Water	Dye compatible with herbicide. Flag strip edges.
Chopper	Imazapyr	2.0 lbs/gal 27.6%	8 oz.			
Oust Extra	Sulfometuron methyl	56.25% by weight	4 oz.			
	Metsulfuron methyl	15.00% by weight				
Syltac or Dynamic or Phase	N/A	4 oz. Syltac or Phase 6 oz. Dynamic				

**Treatment Technique and Rate:** Ground broadcast, waving wand foliar application with backpack sprayers. Spray foliage till wet.

**Special Requirements:** Herbicide must be mixed on site in the presence of the DNR compliance representative. Applicator's equipment and application method must be in compliance with herbicide labels and Department of Agriculture regulations.

**GENERAL INFORMATION** – The following information is provided as a courtesy to bidders. This information is a general estimate and as such may not be accurate.

**Elevation:** 915-1015 Ft.

**Slope:** 20% Average

**Aspect:** NE

**Gate:** Yes

**Access:** From Sedro-Woolley, travel 12.5 miles north on highway 9 and turn left onto the CC-ML. Go through the locked gate and continue up the CC-ML for 1.7 miles. Turn right onto the CC-14. Follow the CC-14 for 1.2 miles and turn right on to the CC-1411. Follow the CC-1411 for 1.1 miles to the unit.


**Additional Comments:** Unit is behind a locked gate please call the NW Region office for gate information. Year harvested 2008.

**Nearest Hospital:** United General Hospital, 1971 Highway 20, Sedro Woolley, WA. (360) 856-6021

BK-6  
APPLE PIE 2  
5 ACRES

# UNIT MAP

Invitation to Bid Number 1240  
Item 2

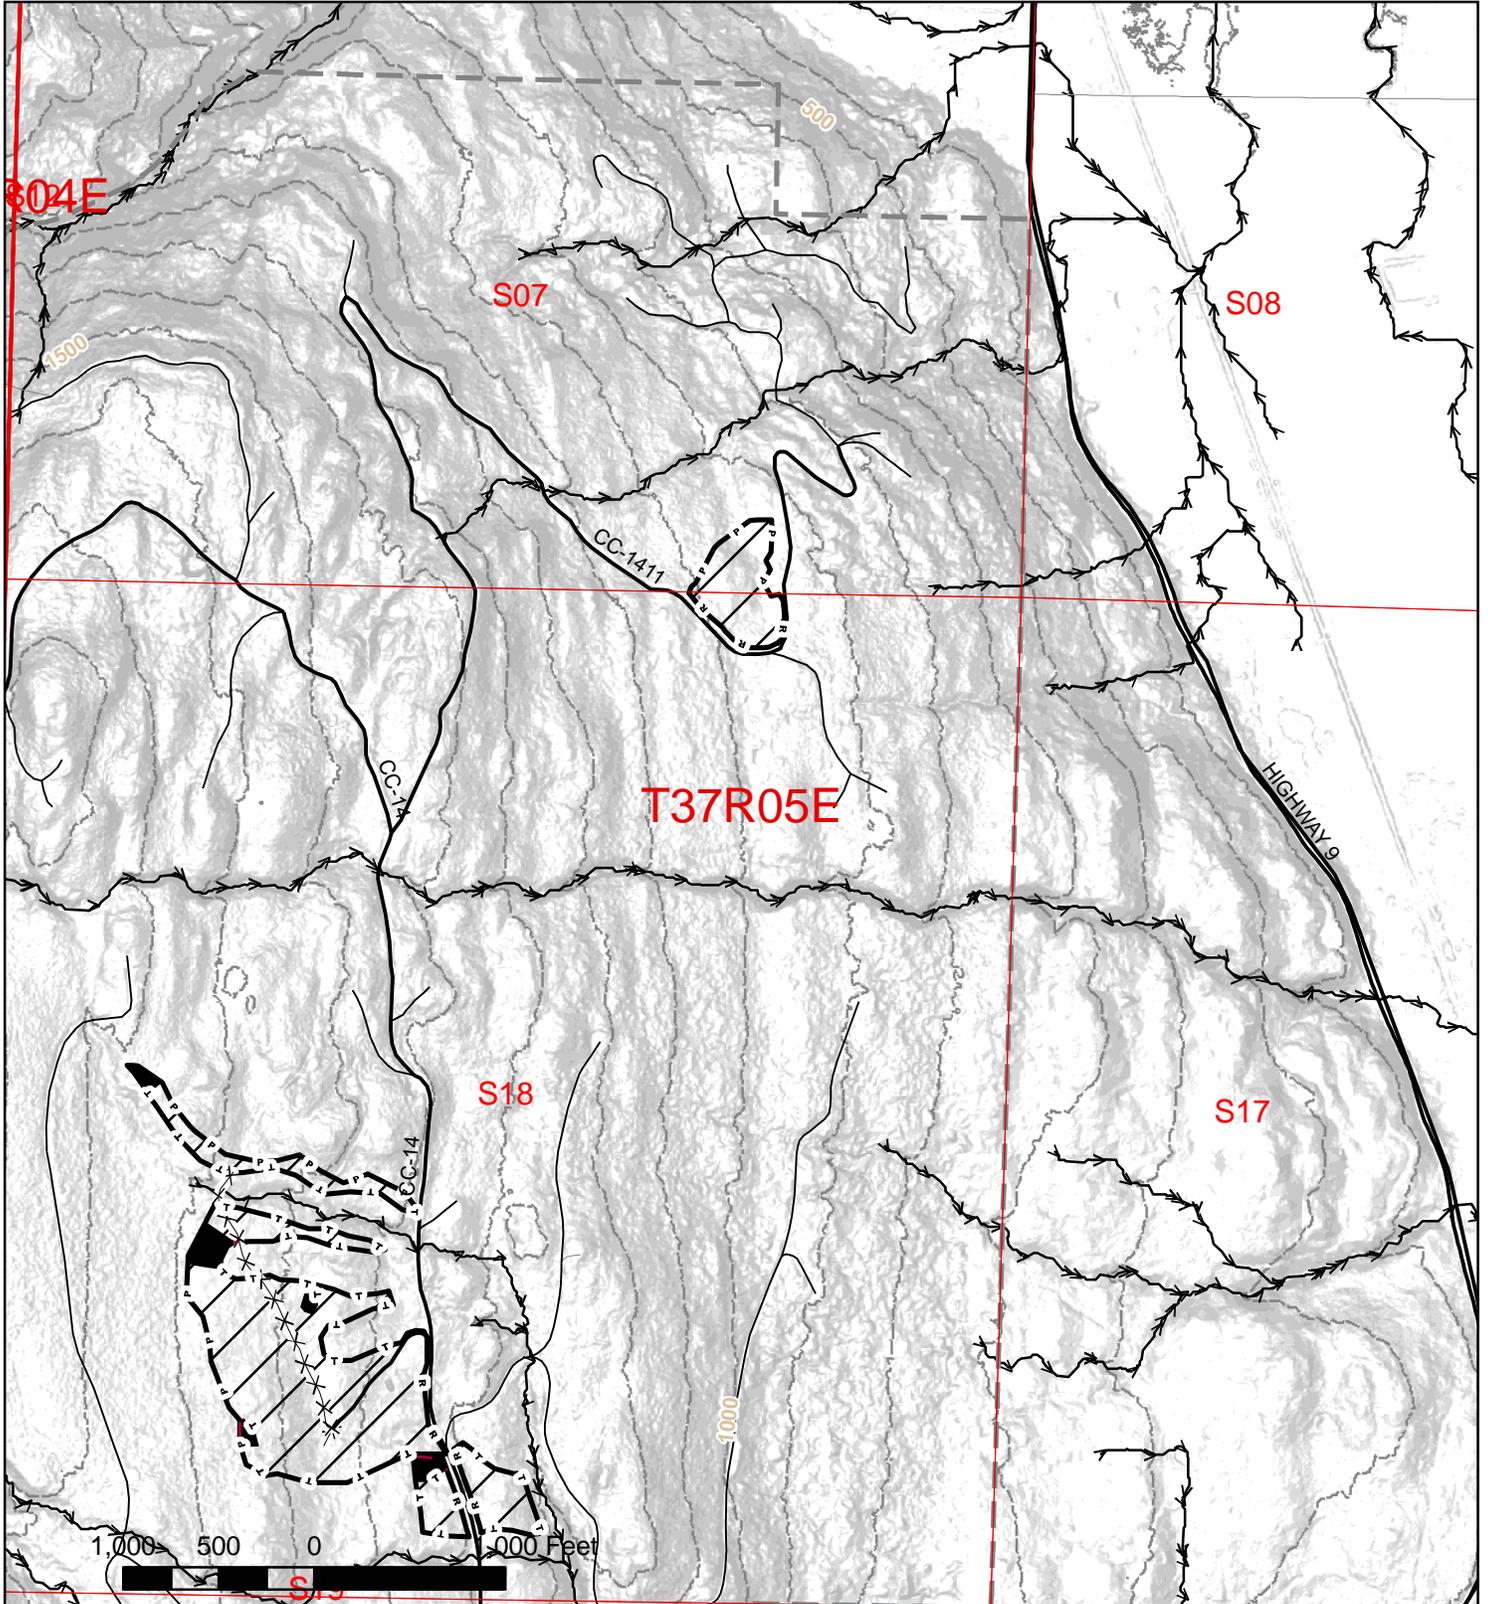

Roads	DNR-Managed Lands
Abandoned Road	Treatment Unit
Timber	Roads(Unit Boundary)
Plantation	

N  
W E  
S  
35

**UNIT DESCRIPTION**

**SITE PREP, GROUND HERBICIDE**

**INVITATION TO BID # 1240**

**Region:** NORTHWEST

**District:** BAKER

**Local:** HAMILTON

**Unit Name:** Mills Creek Regen

**Item Number:** 2

**Unit Number:** BK-7

**Section(s):** 17,18

**Township:** 36N

**Range:** 5E W.M.

**Trust:** 03

**Acres:** 8

**Section(s):** 19,20

**Township:** 36N

**Range:** 5E W.M.

**Trust:** 01

**Acres:** 2

**Total:** 10

**SPECIFICATIONS**

**Contract Period:** August 3 - September 4, 2009

**Minimum Crew Size:** 6

**Boundaries:** See unit map.

**Buffer Zones:** Avoid herbicide application in stream channels with water present.

**Vegetation To Be Treated:** Hardwoods, elderberry, slamonberry, blackberry, thimble berry and all new vegetation.

Product (Trade Name)	Active Ingredient (A.I.)	A.I. Concentration	Rate/Acre	Total Solution/Ac	Carrier	Marking Required
Accord Conc.	Glyphosate	5.4 lbs/gal 53.8%	48 oz.	10 gallons	Water	Dye compatible with herbicide. Flag strip edges.
Chopper	Imazapyr	2.0 lbs/gal 27.6%	8 oz.			
Oust Extra	Sulfometuron methyl	56.25% by weight	4 oz			
	Metsulfuron methyl	15% by weight				
Syltac or Dynamic Or Phase	N/A	4 oz Syltac or Phase 6 oz Dynamic				

**Treatment Technique and Rate:** Ground broadcast, waving wand foliar application with backpack sprayers. Spray foliage till wet.

**Special Requirements:** Herbicide must be mixed on site in the presence of the DNR compliance representative. Applicator's equipment and application method must be in compliance with herbicide labels and Department of Agriculture regulations.

**GENERAL INFORMATION** – The following information is provided as a courtesy to bidders. This information is a general estimate and as such may not be accurate.

**Elevation:** 940 – 1465 Ft.

**Slope:**43% Average

**Aspect:** SW

**Gate:** Yes

**Access:** From Sedro-Woolley, travel north on Hwy 9 for 6.5 miles and turn right on Hathaway Rd. Travel 0.7 miles on Hathaway to the gate at the end of the road. Road becomes the TH-ML. Follow the TH-ML for approximately 2 miles and turn right on to the TH-19. The TH-19 is abandoned at this point and a 0.5 miles walk-in is required.


**Additional Comments:** Unit is behind a locked gate. Please contact the Northwest Region Office for gate information 360-856-3500. **All roads into unit have been abandoned.** Harvest Year 2009.

**Nearest Hospital:** United General Hospital: 1971 Highway 20, Sedro Woolley, WA. Ph: (360) 856-6021

BK-7  
MILLS CREEK REGEN  
10 ACRES

# UNIT MAP

Invitation to Bid Number 1240  
Item 2

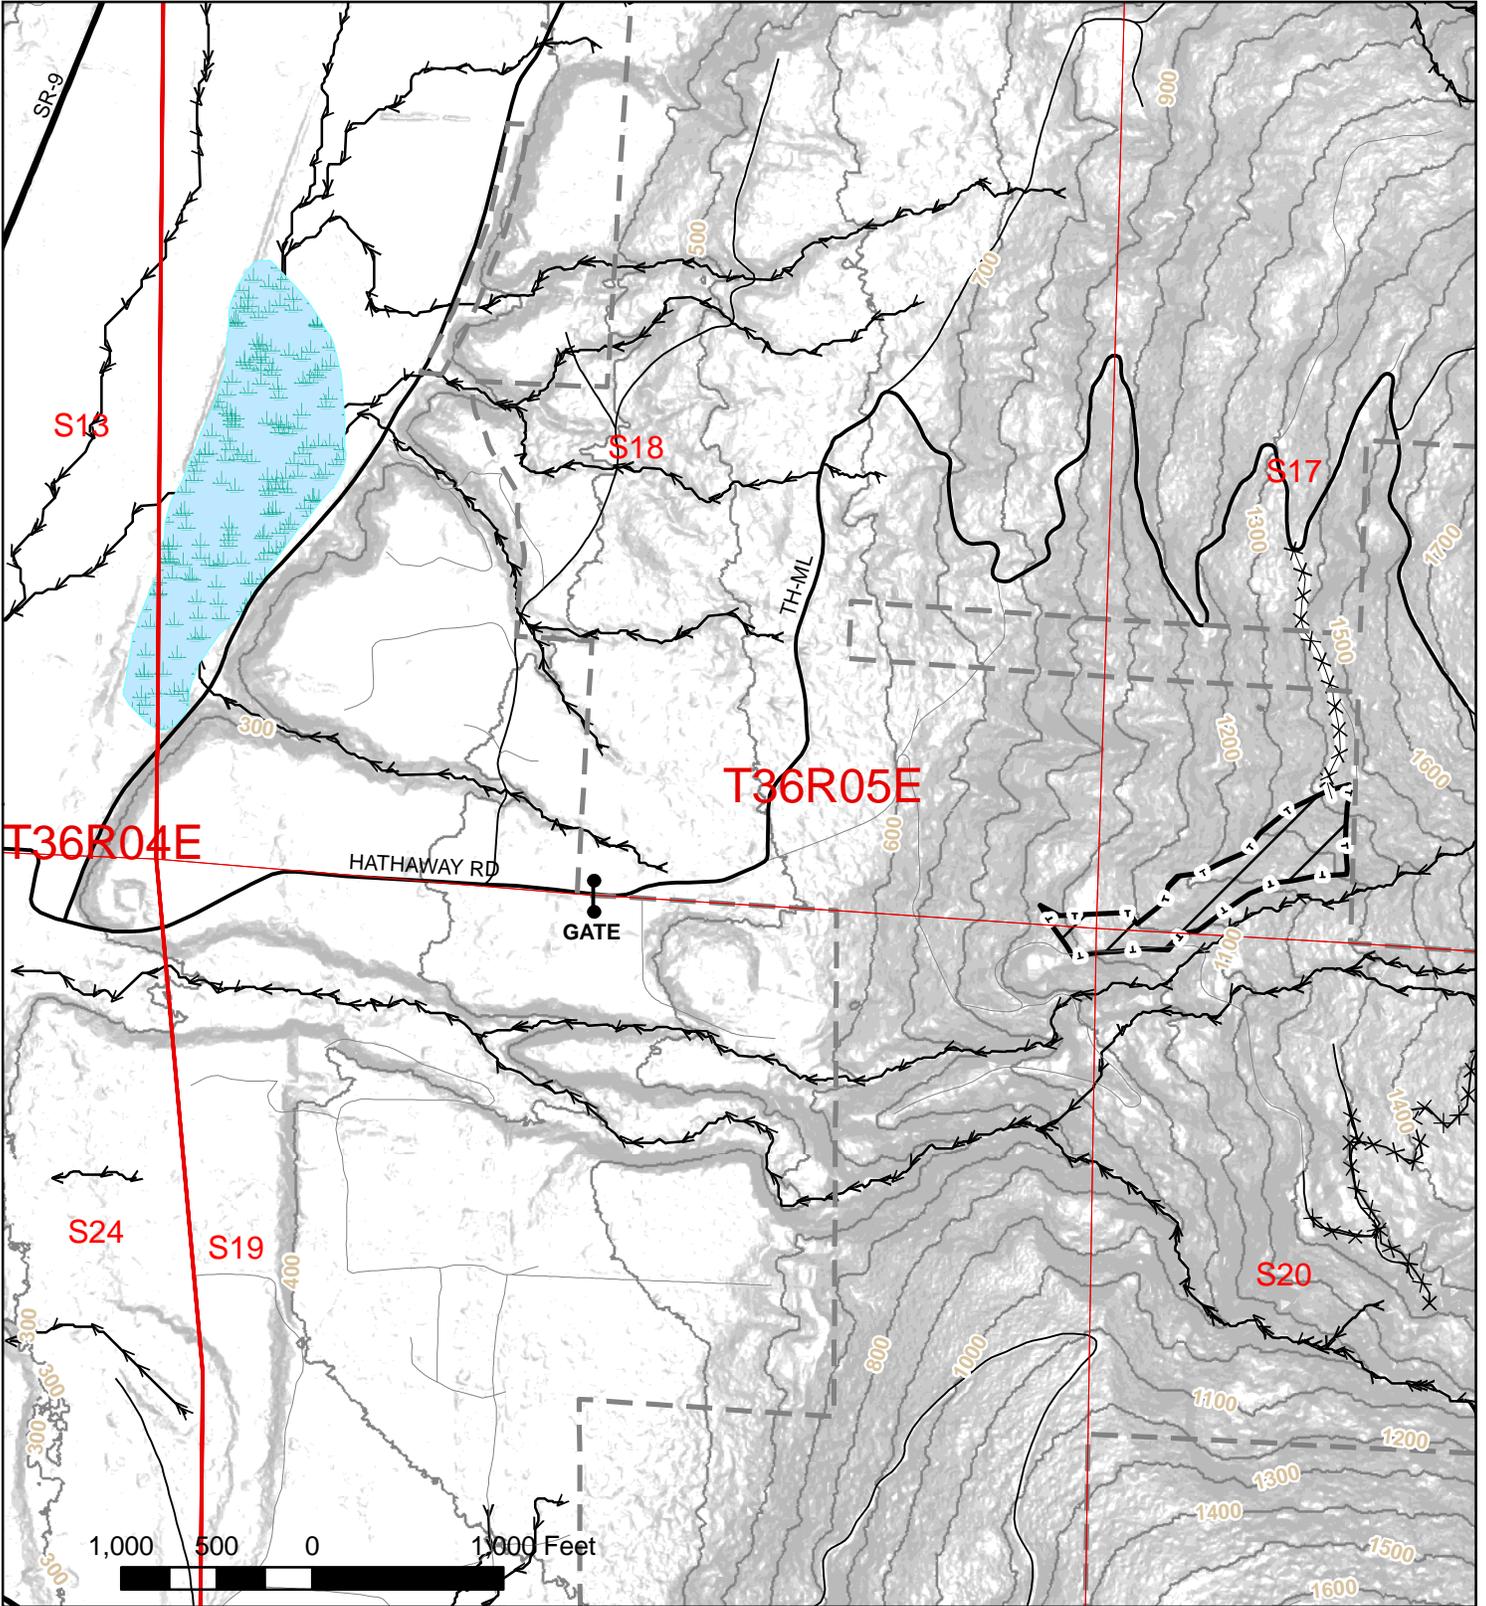

Roads	Treatment Unit	
Abandoned Road	DNR-Managed Lands	
Timber		

**UNIT DESCRIPTION**

**SITE PREP, GROUND HERBICIDE**

**INVITATION TO BID # 1240**

**Region:** NORTHWEST

**District:** BAKER

**Local:** HAMILTON

**Unit Name:** Ginger Bread 1

**Item Number:** 2

**Unit Number:** BK-8

**Section(s):** 2

**Township:** 35N

**Range:** 5E W.M.

**Trust:** 01

**Acres:** 1

**Section(s):** 3

**Township:** 35N

**Range:** 5E W.M.

**Trust:** 01

**Acres:** 2

**Total:** 3

**SPECIFICATIONS**

**Contract Period:** August 3 - September 4, 2009

**Minimum Crew Size:** 6

**Boundaries:** See unit map.

**Buffer Zones:** Avoid herbicide application in stream channels with water present.

**Vegetation To Be Treated:** Hardwoods, elderberry, slamonberry, blackberry, thimble berry and all new vegetation.

Product (Trade Name)	Active Ingredient (A.I.)	A.I. Concentration	Rate/Acre	Total Solution/Ac	Carrier	Marking Required
Accord Concentrate	Glyphosate	5.4 lbs/gal 53.8%	48 oz.	10 gallons	Water	Dye compatible with herbicide. Flag strip edges.
Chopper	Imazapyr	2.0 lbs/gal 27.6%	8 oz.			
Oust Extra	Sulfometuron methyl	56.25% by weight	4 oz			
	Metsulfuron methyl	15% by weight				
Syltac or Dynamic Or Phase	N/A	4 oz Syltac or Phase 6 oz Dynamic				

**Treatment Technique and Rate:** Ground broadcast, waving wand foliar application with backpack sprayers. Spray foliage till wet.

**Special Requirements:** Herbicide must be mixed on site in the presence of the DNR compliance representative. Applicator's equipment and application method must be in compliance with herbicide labels and Department of Agriculture regulations.

**GENERAL INFORMATION** – The following information is provided as a courtesy to bidders. This information is a general estimate and as such may not be exact.

**Elevation:** 1520-1965 Ft.

**Slope:** 58% Average

**Aspect:** SW

**Gate:** Yes

**Access:** From Sedro Woolley, go east on Hwy 20 for 3 miles and turn left onto the CR-ML. Go through the locked gate and follow the CR-ML 2.8 miles to the unit.


**Additional Comments:** Unit is behind a locked gate. **All road within the unit is abandoned.** Please contact the Northwest Region Office for gate information 360-856-3500. Year Harveted 2008.

**Nearest Hospital:** United General Hospital: 1971 Highway 20, Sedro Woolley, WA. Ph: (360) 856-6021

BK-8  
GINGER BREAD 1  
3 ACRES

# UNIT MAP

Invitation to Bid Number 1240  
Item 2

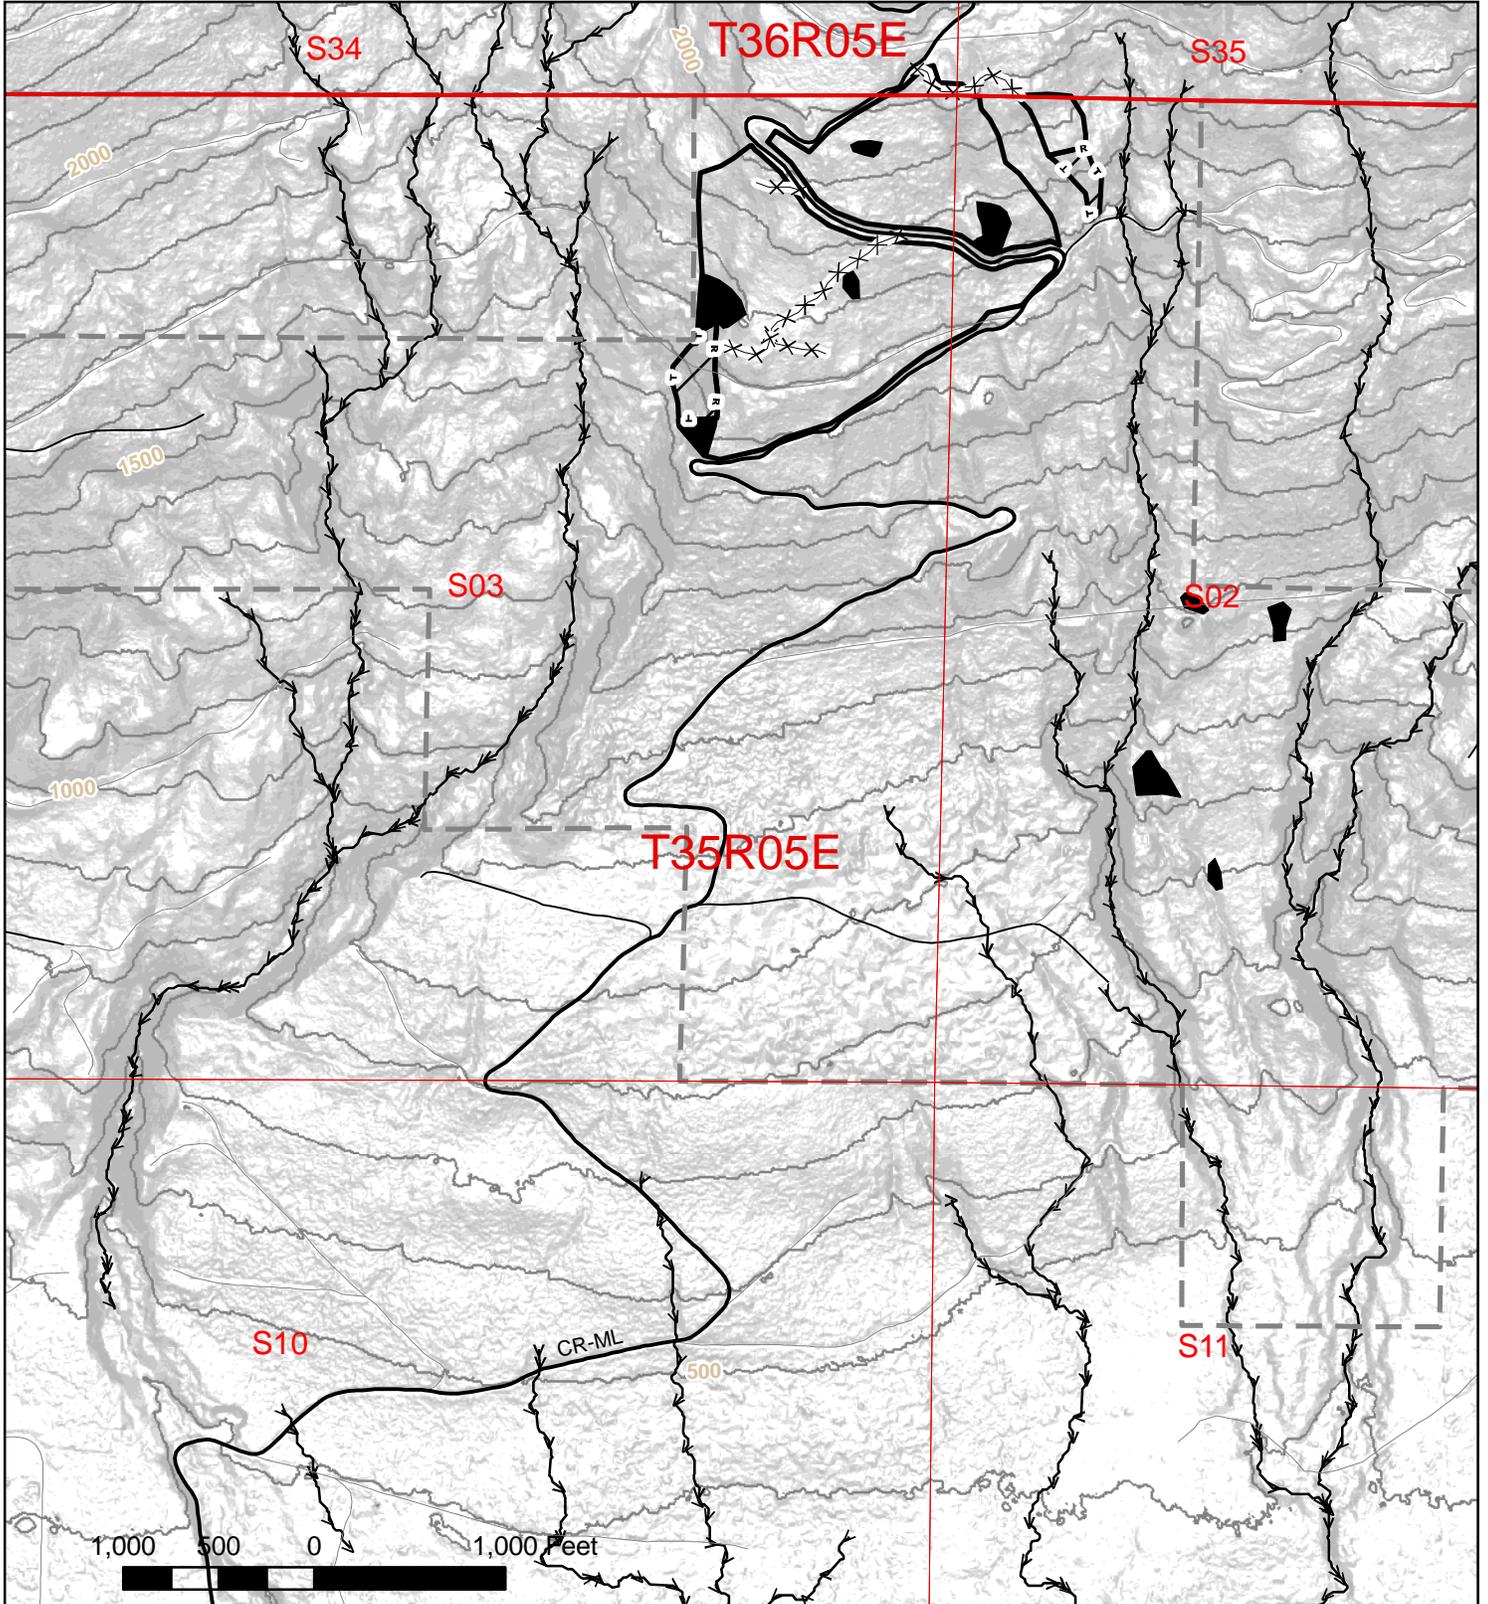

Roads	Treatment Unit	 N W E S 39
Abandoned Road	DNR-Managed Lands	
Timber	Ribbon	

**UNIT DESCRIPTION**

**SITE PREP, GROUND HERBICIDE**

**INVITATION TO BID # 1240**

**Region:** NORTHWEST

**District:** BAKER

**Local:** HAMILTON

**Unit Name:** Median 2AB

**Item Number:** 2

**Unit Number:** BK-9

**Section(s):** 13

**Township:** 36N

**Range:** 5E W.M.

**Trust:** 01

**Acres:** 2

**Section(s):** 14

**Township:** 36N

**Range:** 5E W.M.

**Trust:** 01

**Acres:** 2

**Total:** 4

**SPECIFICATIONS**

**Contract Period:** August 3 - September 4, 2009

**Minimum Crew Size:** 6

**Boundaries:** See unit map.

**Buffer Zones:** Avoid herbicide application in stream channels with water present.

**Vegetation To Be Treated:** Hardwoods, elderberry, slamonberry, blackberry, thimble berry and all new vegetation.

Product (Trade Name)	Active Ingredient (A.I.)	A.I. Concentration	Rate/Acre	Total Solution/Ac	Carrier	Marking Required
Accord Concentrate	Glyphosate	5.4 lbs/gal 53.8%	48 oz.	10 gallons	Water	Dye compatible with herbicide. Flag strip edges.
Chopper	Imazapyr	2.0 lbs/gal 27.6%	8 oz.			
Oust XP	Sulfometuron methyl	75% by weight	3 oz			
Syltac or Dynamic Or Phase	N/A	4 oz Syltac or Phase 6 oz Dynamic				

**Treatment Technique and Rate:** Ground broadcast, waving wand foliar application with backpack sprayers. Spray foliage till wet.

**Special Requirements:** Herbicide must be mixed on site in the presence of the DNR compliance representative. Applicator's equipment and application method must be in compliance with herbicide labels and Department of Agriculture regulations.

**GENERAL INFORMATION** – The following information is provided as a courtesy to bidders. This information is a general estimate and as such may not be exact.

**Elevation:** 1230-1680 Ft.

**Slope:** 36% Average

**Aspect:** NE

**Gate:** Yes

**Access:** From Sedro Woolley go east 10.5 miles on Hwy 20 and turn left on to Cabin Creek Rd. Go 0.25 miles and turn right onto Hamilton Cemetary Rd. Go 0.25 miles and turn left on to Scott Paper Rd. Follow road through the locked gate where it becomes the SK-ML. Follow the SK-ML for 5.8 miles to the SK-64. Turn left and follow the SK-64 for 1.9 miles and through the locked gate to the SK-6422. Turn right and go 0.5 miles to the unit. Access to the upper portion of the unit is from the SK-6430. See Unit Map.

**Additional Comments:** Unit is behind two locked gates. Please contact the Northwest Region Office for gate information 360-856-3500. Year Harvested 2008.


**Nearest Hospital:** United General Hospital: 1971 Highway 20, Sedro Woolley, WA. Ph: (360) 856-6021

BK-9  
MEDIAN 2AB  
4 ACRES

# UNIT MAP

## Invitation to Bid Number 1240

### Item 2

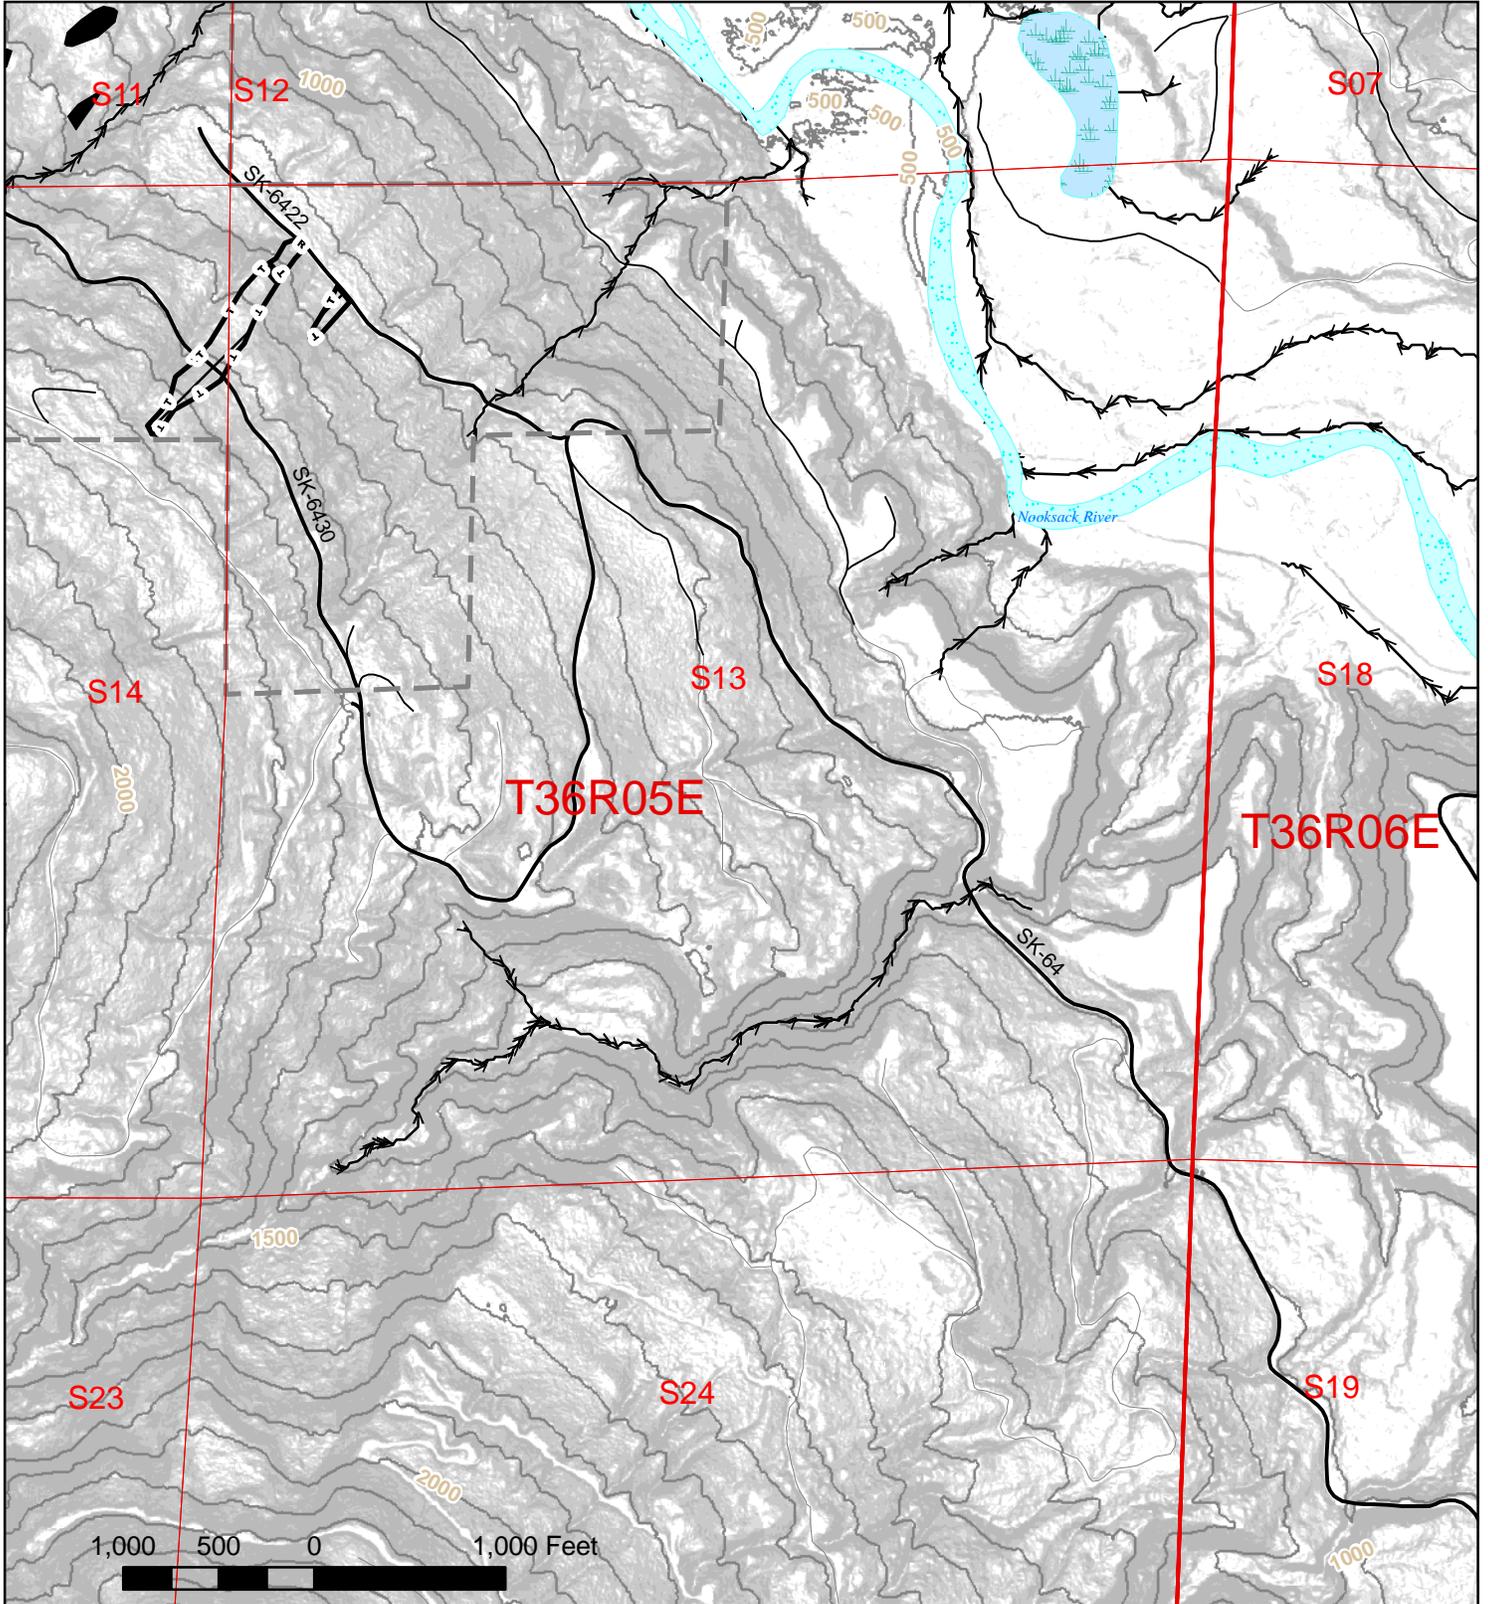

Roads	Treatment Unit	
Abandoned Road	DNR-Managed Lands	
Timber	Road	

**UNIT DESCRIPTION**

**CONIFER RELEASE, GROUND HERBICIDE**

**INVITATION TO BID # 1240**

**Region:** NORTHWEST

**District:** BAKER

**Local:** HAMILTON

**Unit Name:** Alger HWD A&B

**Item Number:** 2

**Unit Number:** BK-10

**Section(s):** 9

**Township:** 36N

**Range:** 4E W.M.

**Trust:** 01

**Acres:** 30

**Section(s):** 16

**Township:** 36N

**Range:** 4E W.M.

**Trust:** 01

**Acres:** 10

**Total:** 40

**SPECIFICATIONS**

**Contract Period:** August 3 - 14, 2009

**Minimum Crew Size:** 6

**Boundaries:** See unit map.

**Buffer Zones:** Avoid herbicide application in stream channels with water present.

**Vegetation To Be Treated:** Red elderberry.

Product (Trade Name)	Active Ingredient (A.I.)	A.I. Concentration	Rate/ Acre	Total Solution/Ac	Carrier	Marking Required
Transline	Clopyralid	40.9% by weight	5 oz.	10 gallons	Water	Dye compatible with herbicide. Flag strip edges.
Syl Gard, Kinetic or Slither	N/A	0.5 oz				

**Treatment Technique and Rate:** Ground broadcast, waving wand foliar application with backpack sprayers. Spray foliage till wet.

**Special Requirements:** Herbicide must be mixed on site in the presence of the DNR compliance representative. Applicator's equipment and application method must be in compliance with herbicide labels and Department of Agriculture regulations.

**GENERAL INFORMATION** – The following information is provided as a courtesy to bidders. This information is a general estimate and as such may not be accurate.

**Elevation:** 615 – 1010 Ft.

**Slope:** 33% Average

**Aspect:** W

**Gate:** Yes

**Access:** From Sedro-Woolley, travel north on Hwy 9 for 5 miles and turn left onto Prairie Rd. Follow Prairie Rd. for 3 miles and turn right on Parson Creek Rd. Go 1.2 miles on Parson Creek and turn right onto Skaarup Rd. Go 0.5 miles on Skaarup Rd. to the locked gate. The road becomes the AL-MI. Follow the AL-ML for 2 miles and turn left onto the A-1200. Go through the locked gate and follow the A-1200 for 1 mile to where the road is abandoned. There is a 0.25 mile walk to the units.


**Additional Comments:** Unit is behind a locked gate. **All road within the units is abandoned.** Please contact the Northwest Region Office for gate information 360-856-3500. Year Harvested 2005.

**Nearest Hospital:** United General Hospital: 1971 Highway 20, Sedro Woolley, WA. Ph: (360) 856-6021

BK- 10  
ALGER HWD A & B  
40 ACRES

# UNIT MAP

## Invitation to Bid Number 1240 Item 2

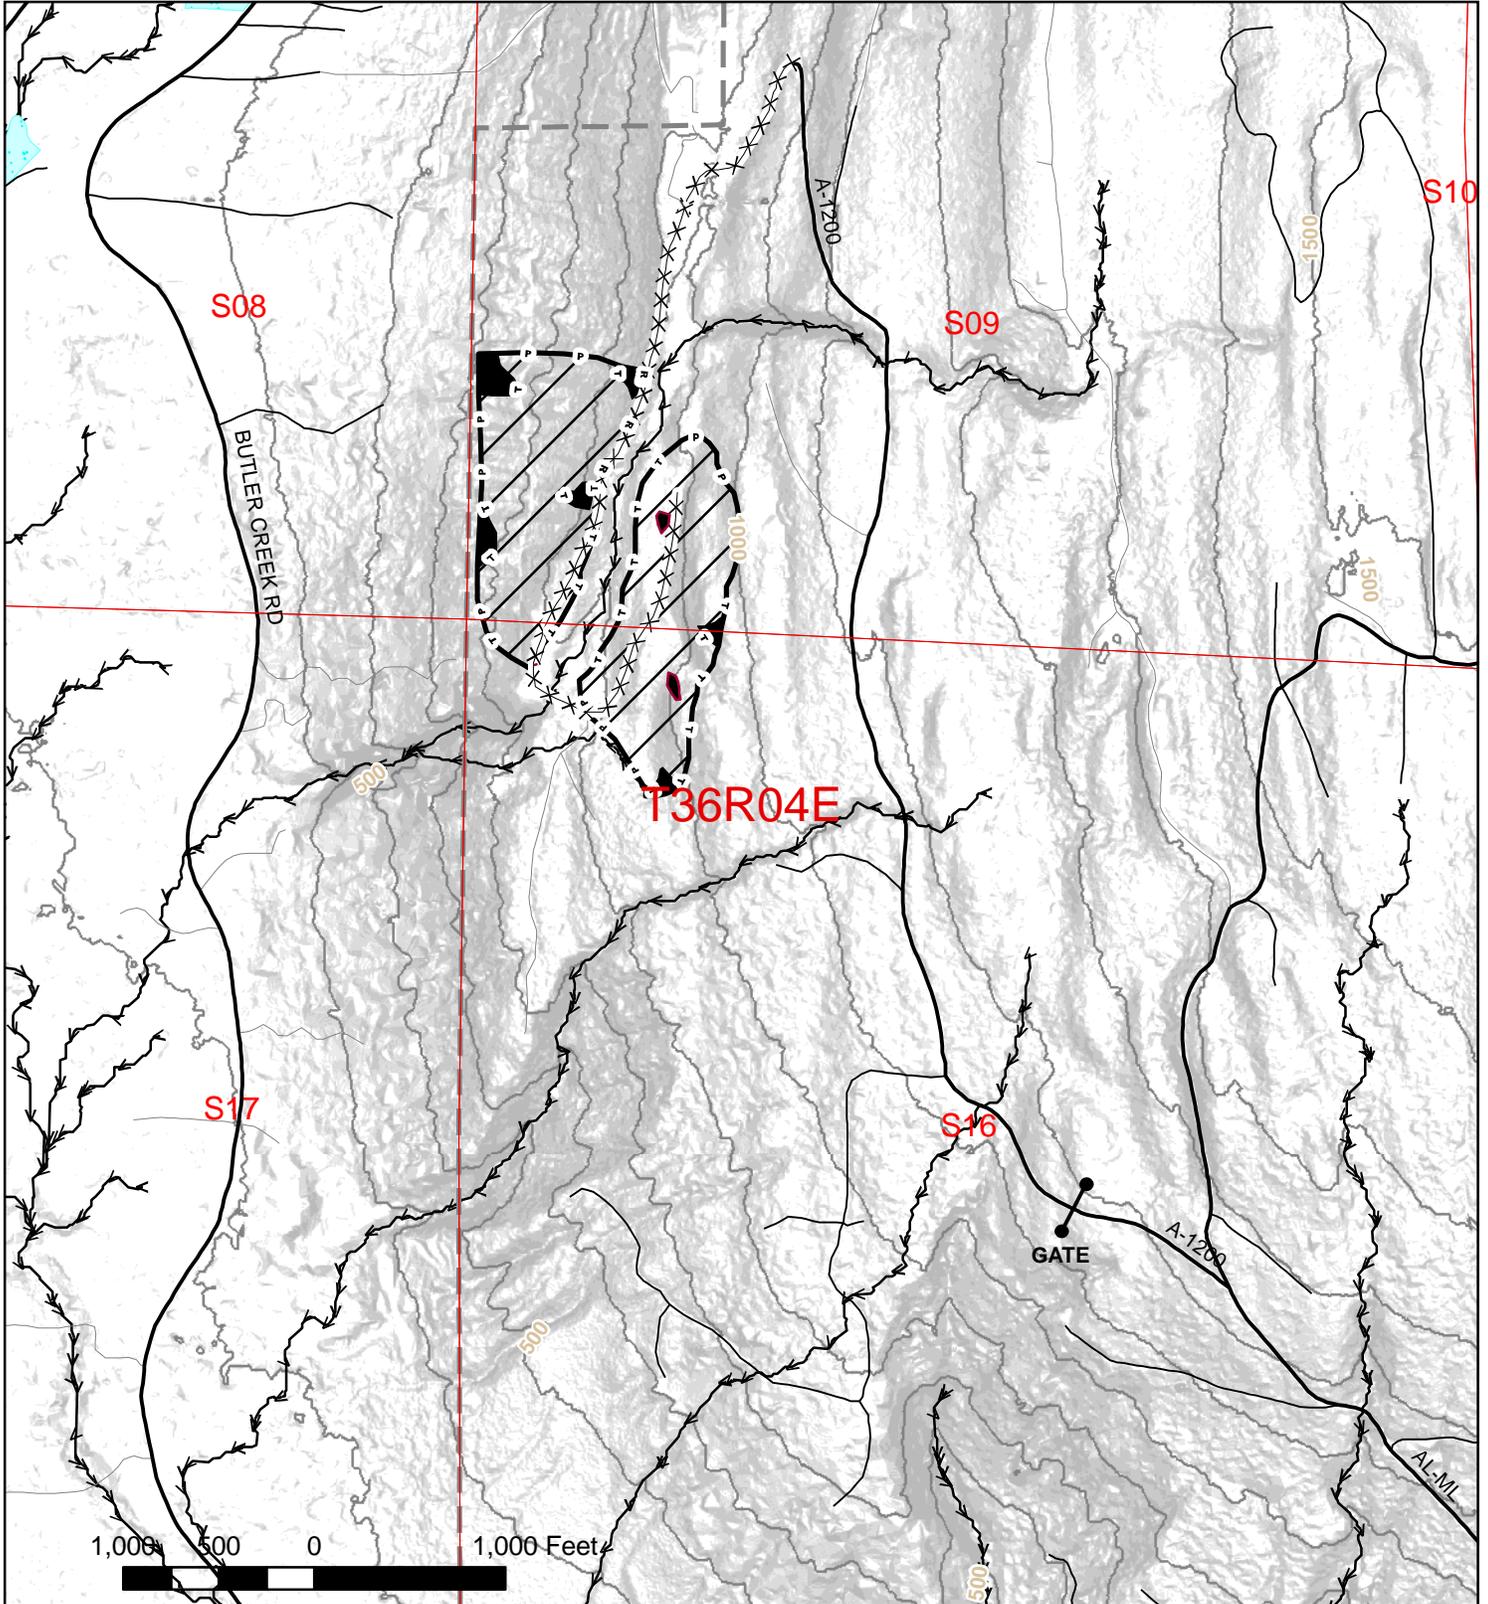

Roads	Treatment Unit	 N W E S 43
Abandoned Road	DNR-Managed Lands	
Timber	ROAD	

**UNIT DESCRIPTION**

**CONIFER RELEASE, GROUND HERBICIDE**

**INVITATION TO BID #1240**

**Region:** NORTHWEST

**District:** BAKER

**Local:** DEMING

**Unit Name:** Bell Ringer1

**Item Number:** 2

**Unit Number:** BK-11

**Section(s):** 18

**Township:** 39N

**Range:** 5E W.M.

**Trust:** 01

**Acres:** 26

**Total:** 26

**SPECIFICATIONS**

**Contract Period:** September 14 –October 9, 2009

**Minimum Crew Size:** 6

**Boundaries:** See unit map.

**Buffer Zones:** Avoid herbicide application in stream channels with water present.

**Vegetation To Be Treated:** Hardwoods, elderberry, salmonberry, blackberry, thimbleberry and all new vegetation.

<b>Product (Trade Name)</b>	<b>Active Ingredient (A.I.)</b>	<b>A.I. Concentration</b>	<b>Rate/Acre</b>	<b>Total Solution/Ac</b>	<b>Carrier</b>	<b>Marking Required</b>
Accord Concentrate	Glyphosate	5.4 lbs/gal 53.8%	36 oz.	10 gallons	Water	Dye compatible with herbicide. Flag strip edges.
Oust XP	Sulfometuron Methyl	75% by weight	2 oz.			
Sylgard or Kinetic or Slither	N/A	N/A	0.5 oz.			

**Treatment Technique and Rate:** Ground broadcast, waving wand foliar application with backpack sprayers. Spray foliage till wet.

**Special Requirements:** Herbicide must be mixed on site in the presence of the DNR compliance representative. Applicator’s equipment and application method must be in compliance with herbicide labels and Department of Agriculture regulations.

**GENERAL INFORMATION** – The following information is provided as a courtesy to bidders. This information is a general estimate and as such may not be exact.

**Elevation:** 1805 – 2260 Ft.

**Slope:**32% Average

**Aspect:** SW

**Gate:** Yes

**Access:** From Bellingham go east on Hwy 542 to milepost 11.6. Turn left on Hillard road. Follow Hillard Rd. 0.1 miles where it becomes the P-1000. Follow the P-1000 0.7 miles to the locked gate. Continue on the P-1000 for 3 miles and turn right on the P-1100 mainline. Follow the P-1100 for 1.5 miles to the P-1140. Turn left and travel 0.2 miles to unit.


**Additional Comments:** Unit is behind a locked gate. Please contact Northwest Region at 360-856-3500 for gate information. Year Harvested 2005.

**Nearest Hospital:** St. Joseph Hospital, 2901 Squalicum Parkway, Bellingham, WA. Ph: (360) 734-5400

BK- 11  
BELL RINGER 1  
26 ACRES

# UNIT MAP

Invitation to Bid Number 1240  
Item 2

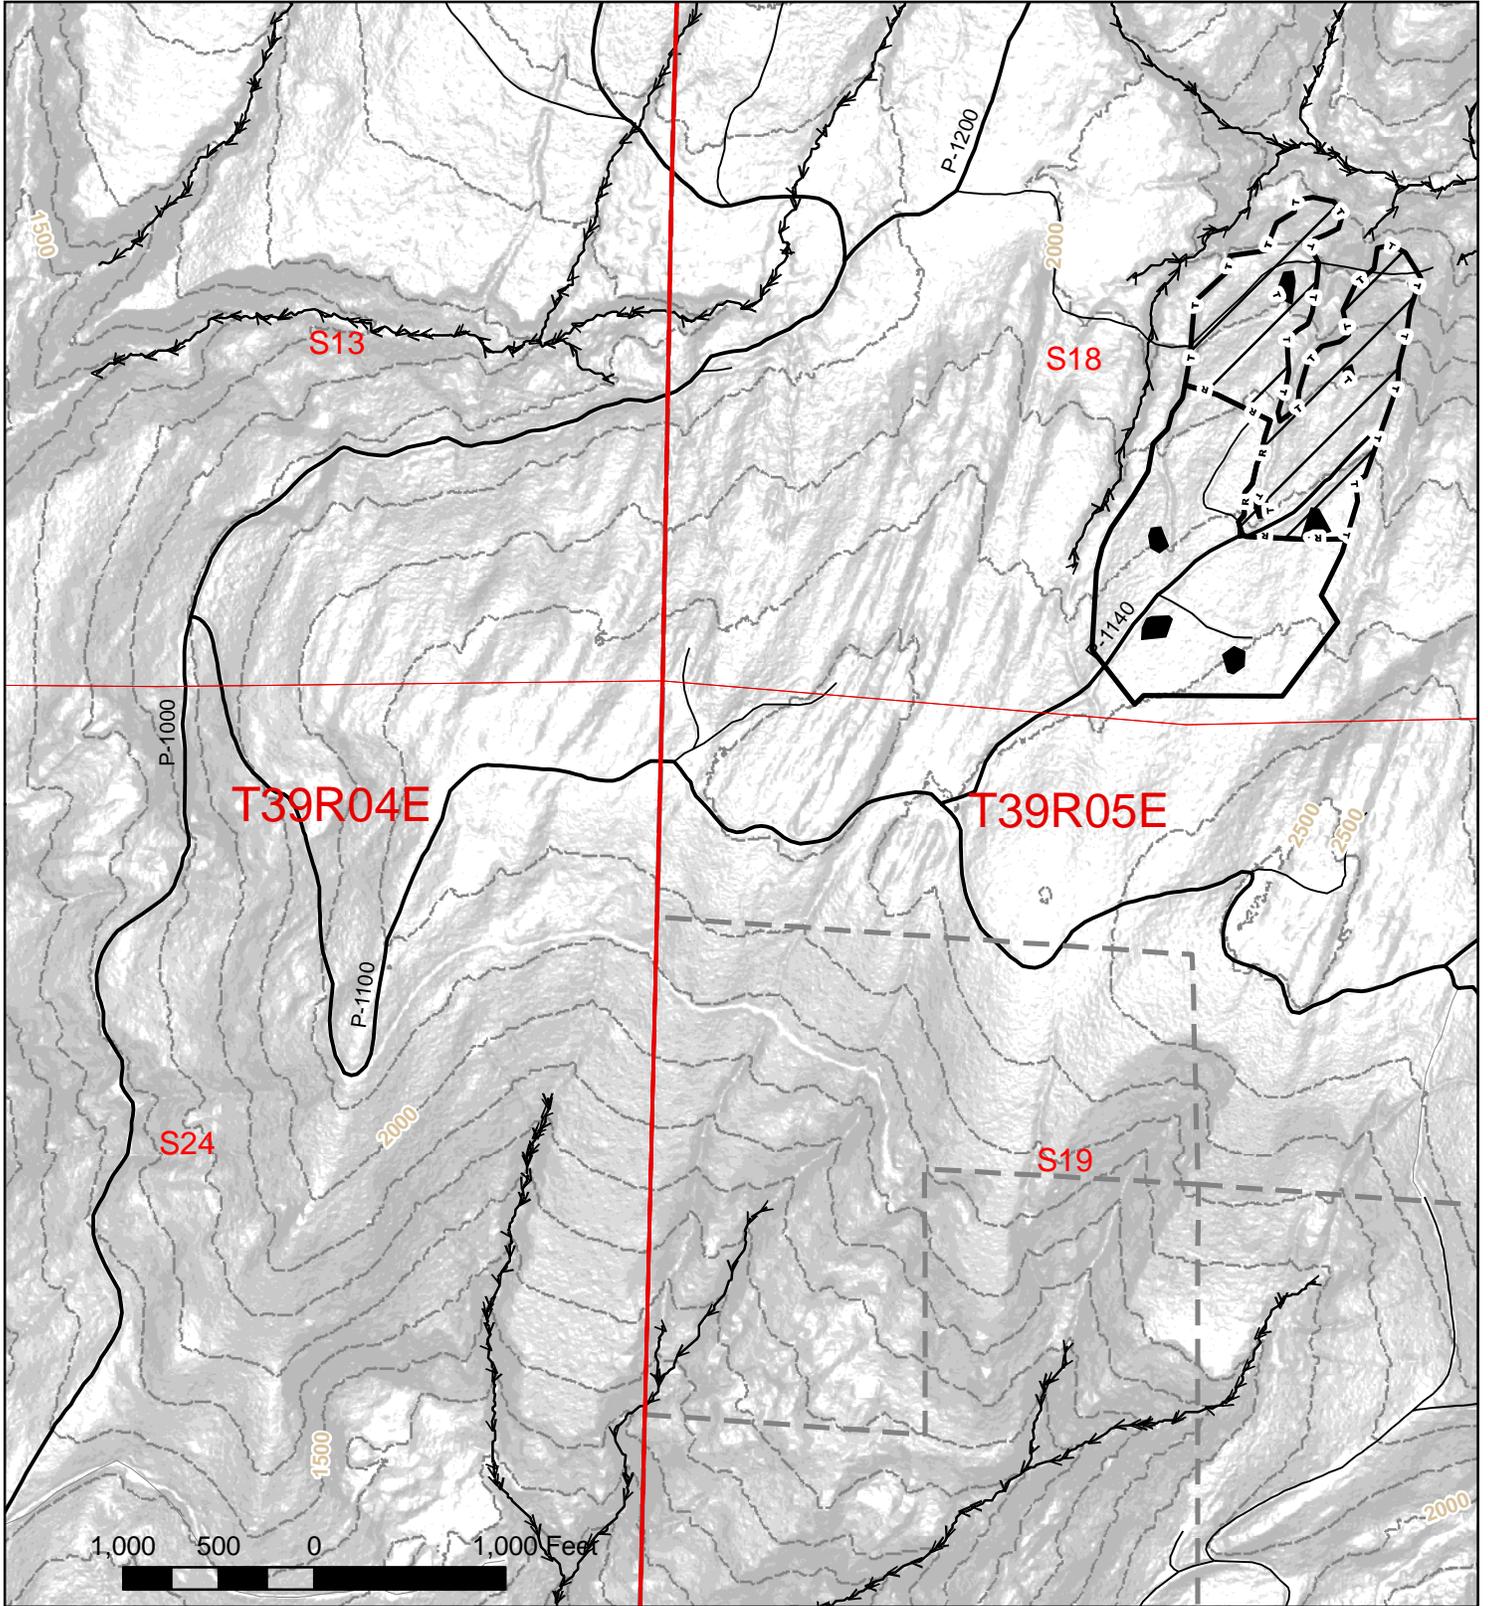

Roads	Treatment Unit	 N W E S 45
Abandoned Road	DNR-Managed Lands	
Timber	Ribbon	

BK-2 SOUTHERN BELL  
BK-3 WILLIAMS LAKE  
BK-11 BELL RINGER  
BK-12 RUTSATZ PASS


# VICINITY MAP 2

## Invitation to Bid Number 1240

### Item 2



Northwest Region  
Baker District

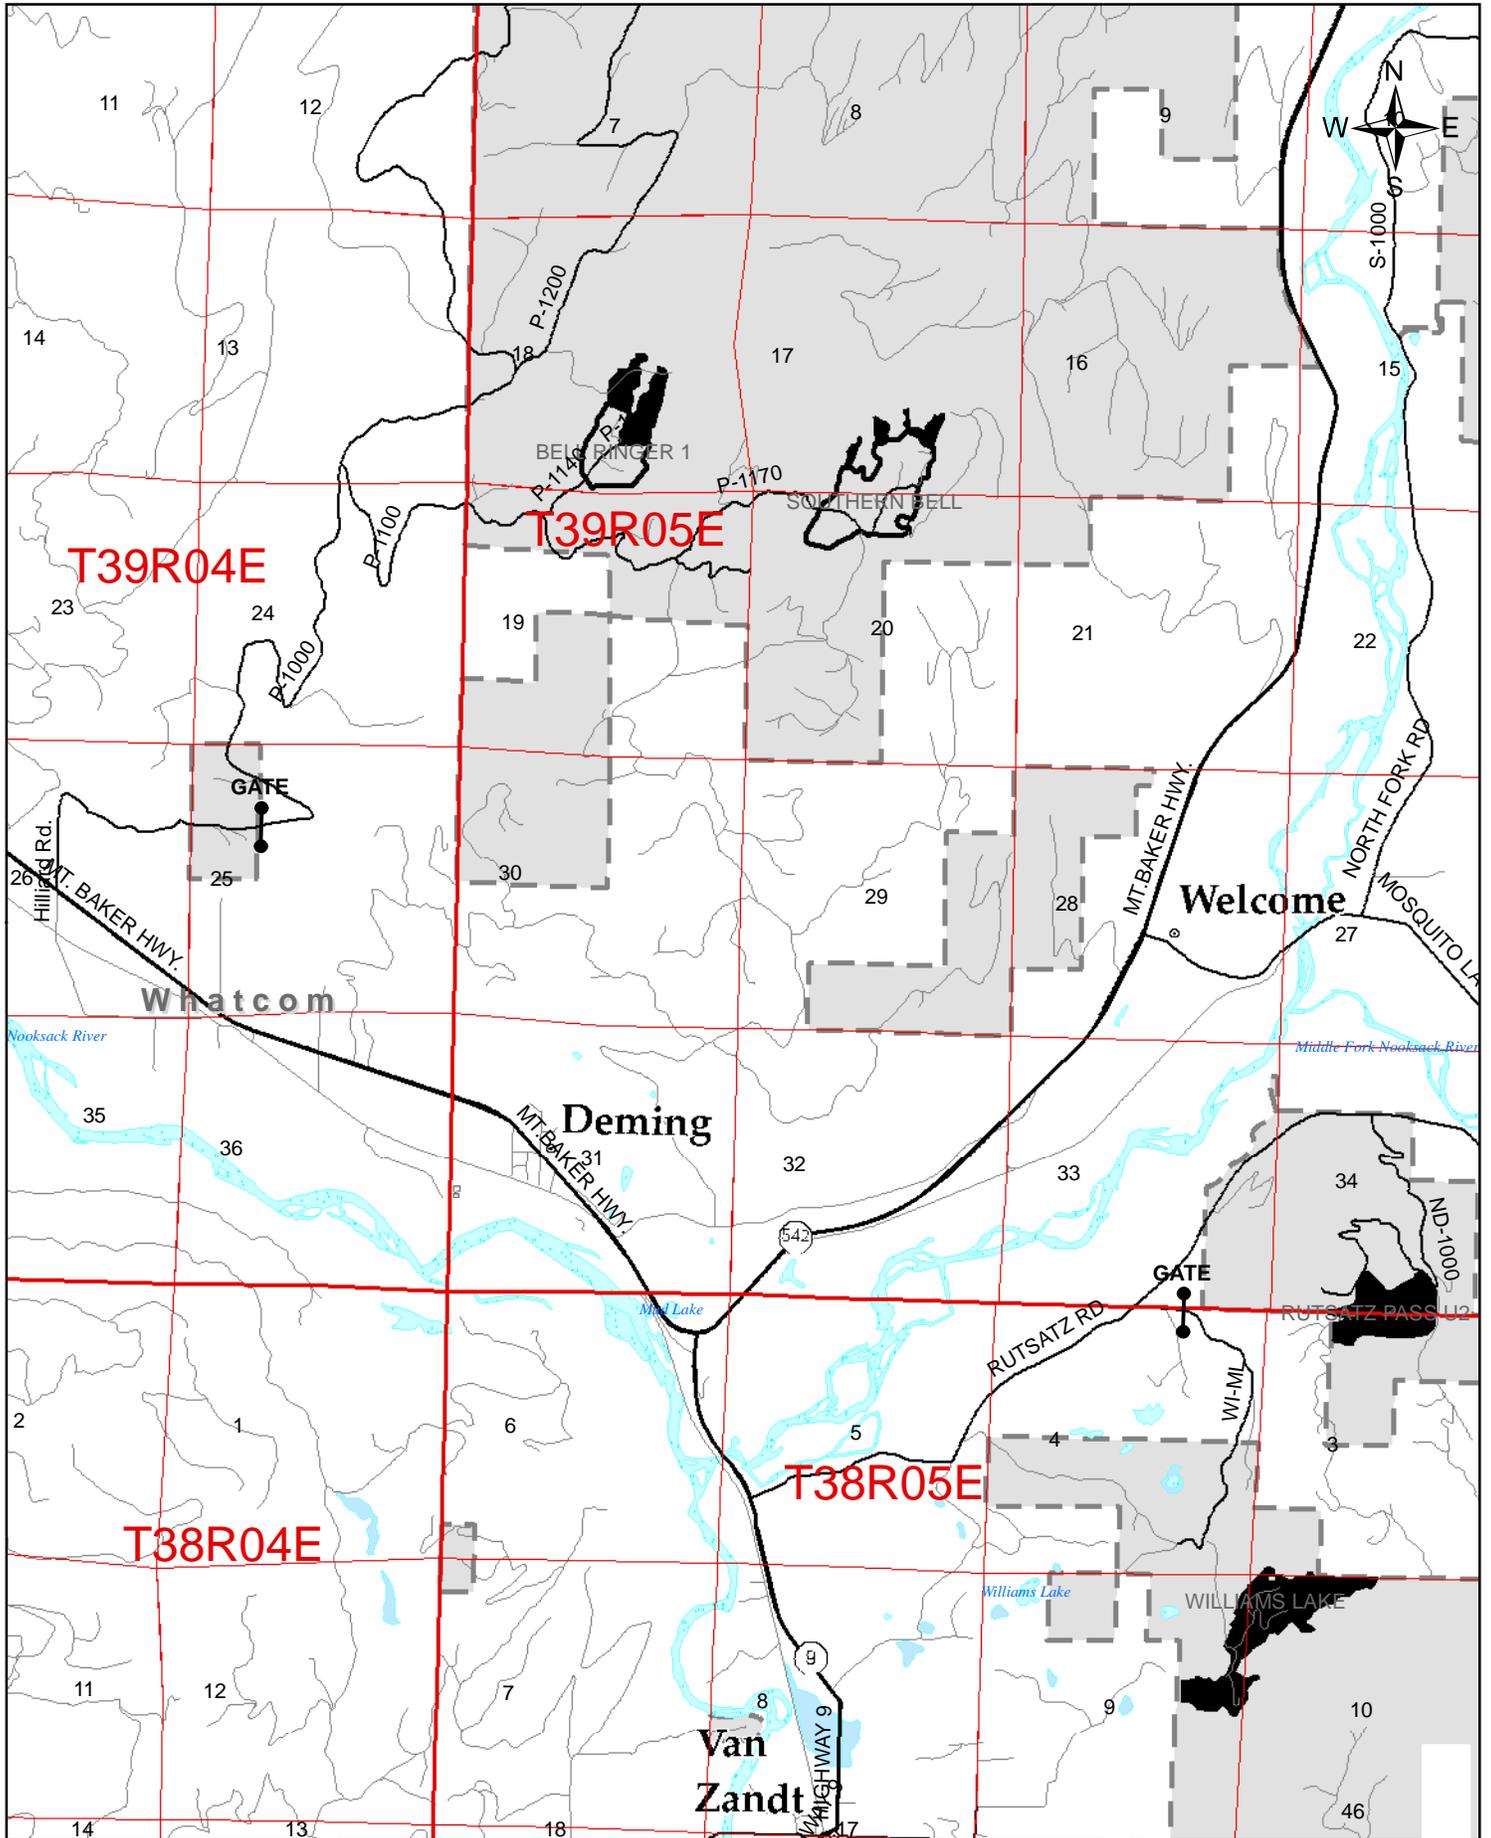

## UNIT DESCRIPTION

### CONIFER RELEASE, GROUND HERBICIDE

### INVITATION TO BID #1240

**Region:** NORTHWEST

**District:** BAKER

**Local:** DEMING

**Unit Name:** Rutsatz Pass U2

**Item Number:** 2

**Unit Number:** BK-12

**Section(s):** 03

**Township:** 38N

**Range:** 5E W.M.

**Trust:** 01

**Acres:** 21

**Section(s):** 34

**Township:** 39N

**Range:** 5E W.M.

**Trust:** 10

**Acres:** 23

**Total:** 44

### SPECIFICATIONS

**Contract Period:** September 14 – October 9, 2009

**Minimum Crew Size:** 6

**Boundaries:** See unit map.

**Buffer Zones:** Avoid herbicide application in stream channels with water present.

**Vegetation To Be Treated:** Hardwoods, elderberry, salmonberry, blackberry, thimbleberry and all new vegetation.

Product (Trade Name)	Active Ingredient (A.I.)	A.I. Concentration	Rate/ Acre	Total Solution/Ac	Carrier	Marking Required
Accord Concentrate	Glyphosate	5.4 lbs/gal 53.8%	36 oz.	10 gallons	Water	Dye compatible with herbicide. Flag strip edges.
Oust XP	Sulfometuron Methyl	75% by wieght	2 oz.			
Sylgard or Kinetic or Slither	N/A	N/A	0.5 oz.			

**Treatment Technique and Rate:** Ground broadcast, waving wand foliar application with backpack sprayers. Spray foliage till wet.

**Special Requirements:** Herbicide must be mixed on site in the presence of the DNR compliance representative. Applicator's equipment and application method must be in compliance with herbicide labels and Department of Agriculture regulations.

**GENERAL INFORMATION** – The following information is provided as a courtesy to bidders. This information is a general estimate and as such may not be accurate.

**Elevation:** 800 – 1425 Ft.

**Slope:** 47% Average

**Aspect:** SE

**Gate:** No

**Access:** From Sedro-Woolley, go 21 miles north on Hwy 9 and turn right onto Rutsatz Rd. Continue on Rutsatz Rd. for 2.7 miles and turn right onto the ND - 1000 road. Continue on the ND - 1000 road for 2.5 miles to the beginning of the unit.


**Additional Comments:** Year Harvested 2005.

**Nearest Hospital:** St. Joseph Hospital, 2901 Squalicom Parkway, Bellingham, WA. Ph: (360) 734-5400

BK- 12  
RUTSATZ PASS U2  
44 ACRES

# UNIT MAP

Invitation to Bid Number 1240  
Item 2

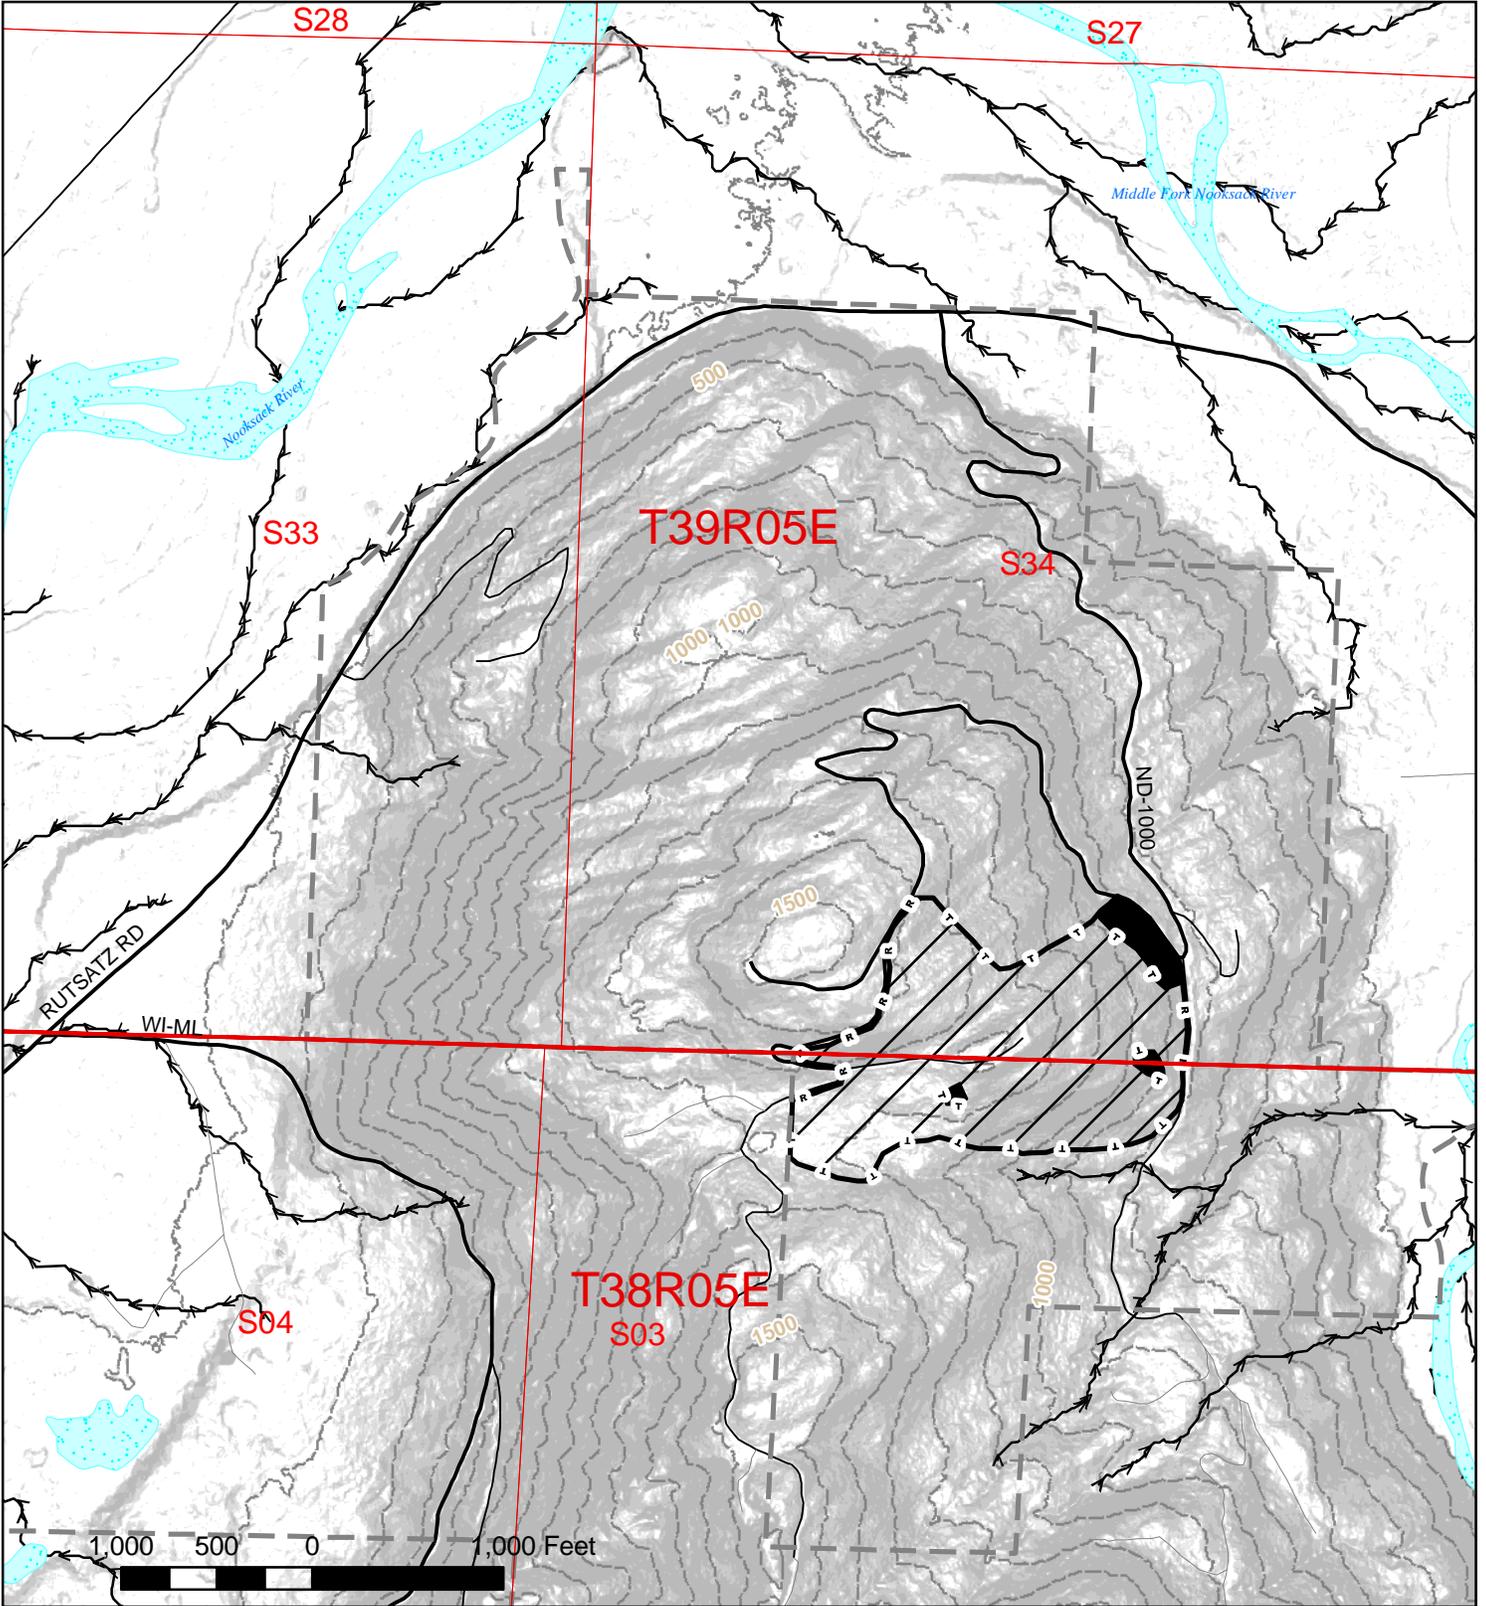

Roads	Treatment Unit	
Abandoned Road	DNR-Managed Lands	
Timber	Road	

## UNIT DESCRIPTION

### CONIFER RELEASE, GROUND HERBICIDE

### INVITATION TO BID #1240

**Region:** NORTHWEST

**District:** BAKER

**Local:** DEMING

**Unit Name:** Saint Stephen

**Item Number:** 2

**Unit Number:** BK-13

<b>Section(s):</b> 17	<b>Township:</b> 38N	<b>Range:</b> 6E W.M.	<b>Trust:</b> 03	<b>Acres:</b> 1
<b>Section(s):</b> 19	<b>Township:</b> 38N	<b>Range:</b> 6E W.M.	<b>Trust:</b> 03	<b>Acres:</b> 7
<b>Section(s):</b> 18	<b>Township:</b> 38N	<b>Range:</b> 6E W.M.	<b>Trust:</b> 03	<b>Acres:</b> 84
				<b>Total:</b> 92

### SPECIFICATIONS

**Contract Period:** September 14 – October 9, 2009

**Minimum Crew Size:** 6

**Boundaries:** See unit map.

**Buffer Zones:** Avoid herbicide application in stream channels with water present.

**Vegetation To Be Treated:** Hardwoods, elderberry, salmonberry, blackberry, thimbleberry and all new vegetation.

Product (Trade Name)	Active Ingredient (A.I.)	A.I. Concentration	Rate/ Acre	Total Solution/Ac	Carrier	Marking Required
Accord Concentrate	Glyphosate	5.4 lbs/gal 53.8%	36 oz.	10 gallons	Water	Dye compatible with herbicide. Flag strip edges.
Oust XP	Sulfometuron Methyl	75% by weight	2 oz.			
Sylgard or Kinetic or Slither	N/A	N/A	0.5 oz.			

**Treatment Technique and Rate:** Ground broadcast, waving wand foliar application with backpack sprayers. Spray foliage till wet.

**Special Requirements:** Herbicide must be mixed on site in the presence of the DNR compliance representative. Applicator's equipment and application method must be in compliance with herbicide labels and Department of Agriculture regulations.

**GENERAL INFORMATION** – The following information is provided as a courtesy to bidders. This information is a general estimate and as such may not be exact.

**Elevation:** 1255 – 2230 Ft.      **Slope:** 47% Average      **Aspect:** W      **Gate:** No

**Access:** From Sedro Woolley, go 15 miles north on Hwy 9 to Mosquito Lake Rd. and turn right. Continue on Mosquito Lake Rd. for 10 miles and turn right on the FS 38 road. Continue on the FS 38 for 2.6 miles to the unit.


**Additional Comments:** Year Harvested 2005.

**Nearest Hospital:** St. Joseph Hospital, 2901 Squalicum Parkway, Bellingham, WA. Ph: (360) 734-5400

BK- 13  
SAINT STEPHEN  
92 ACRES

# UNIT MAP

Invitation to Bid Number 1240  
Item 2

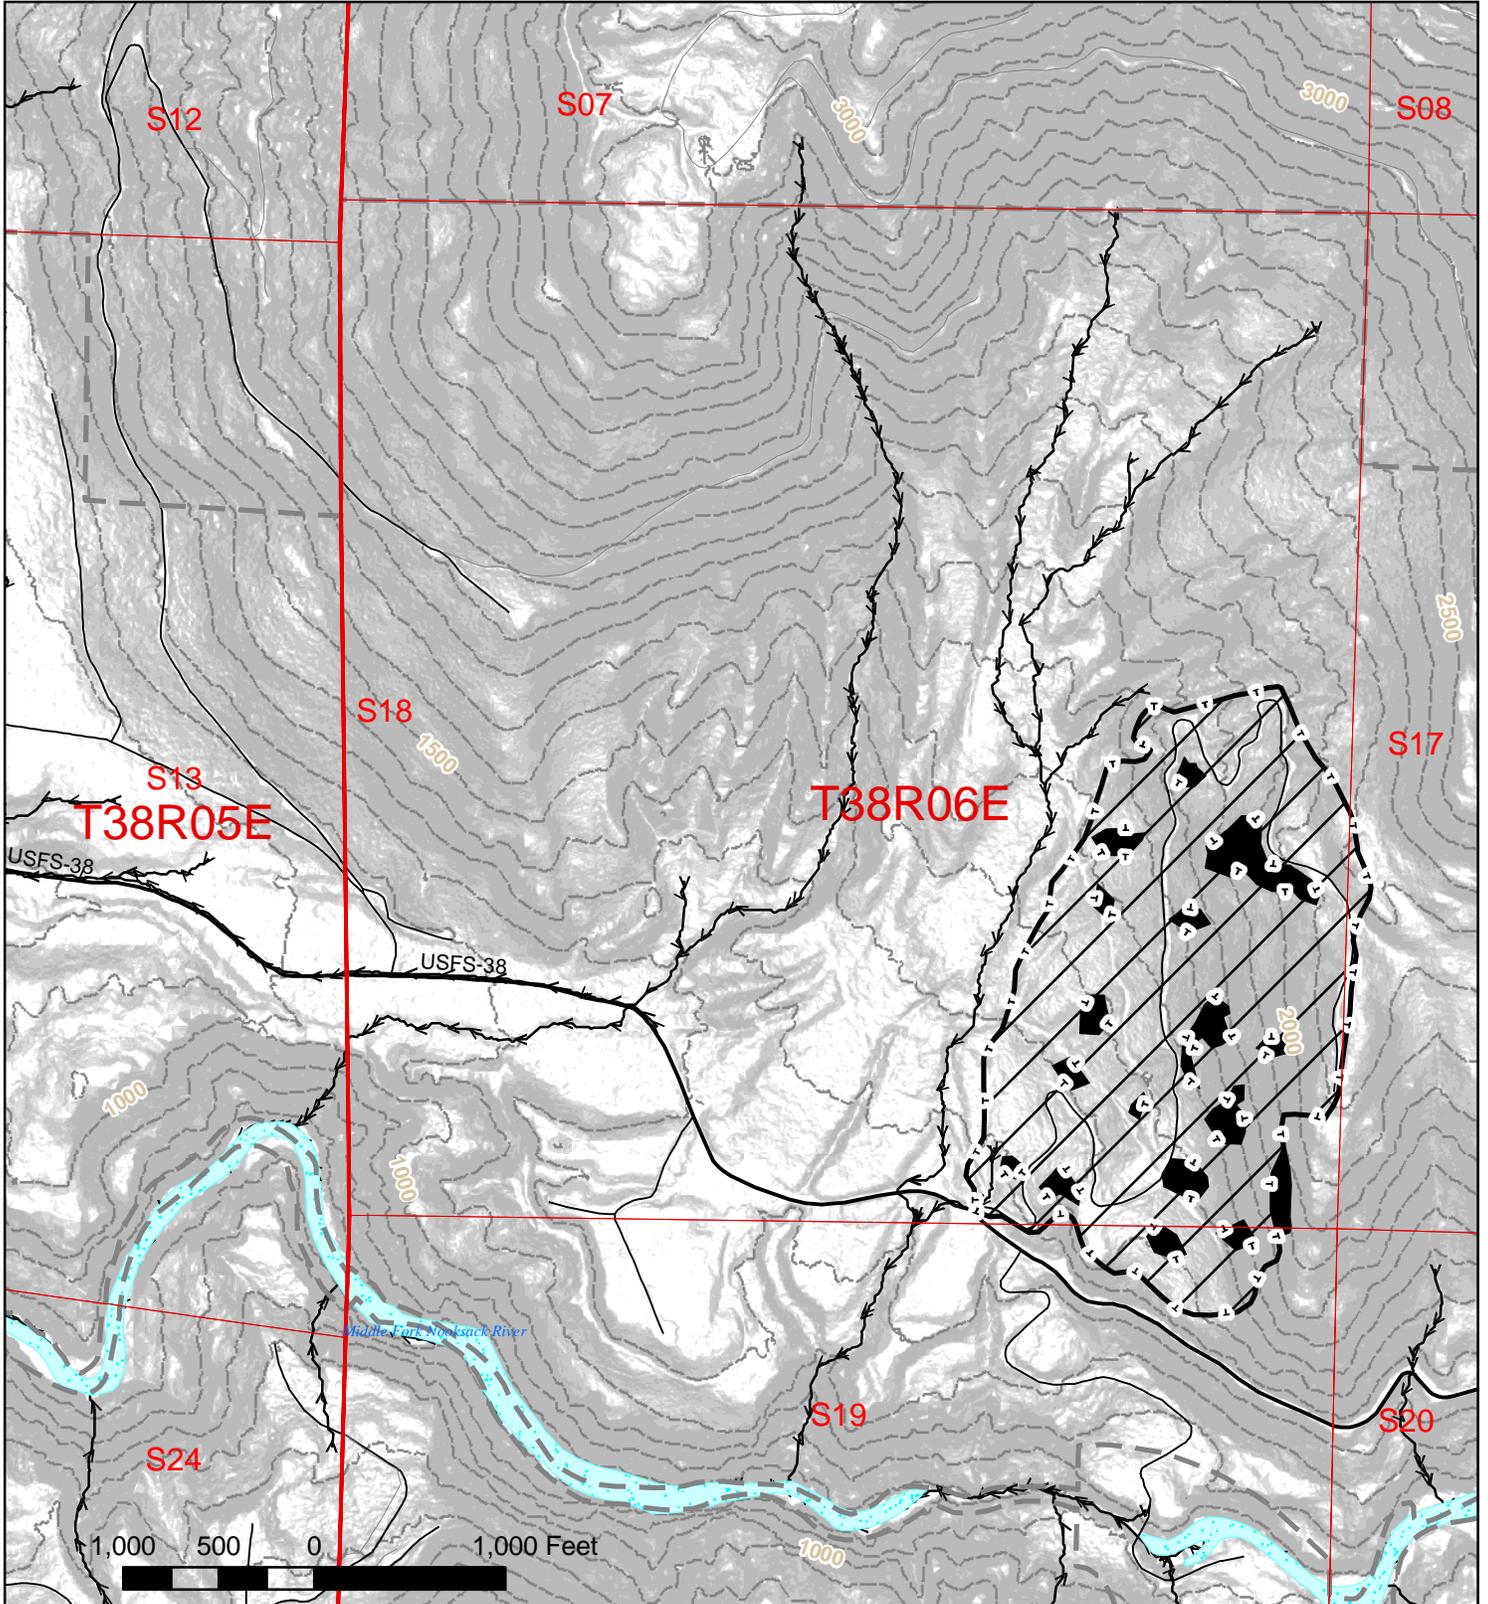

Roads	Treatment Unit	
Abandoned Road	DNR-Managed Lands	
Timber	ROAD	

# VICINITY MAP 3


## Invitation to Bid Number 1240

### Item 2



Northwest Region  
Baker District

BK-13 SAINT STEPHEN

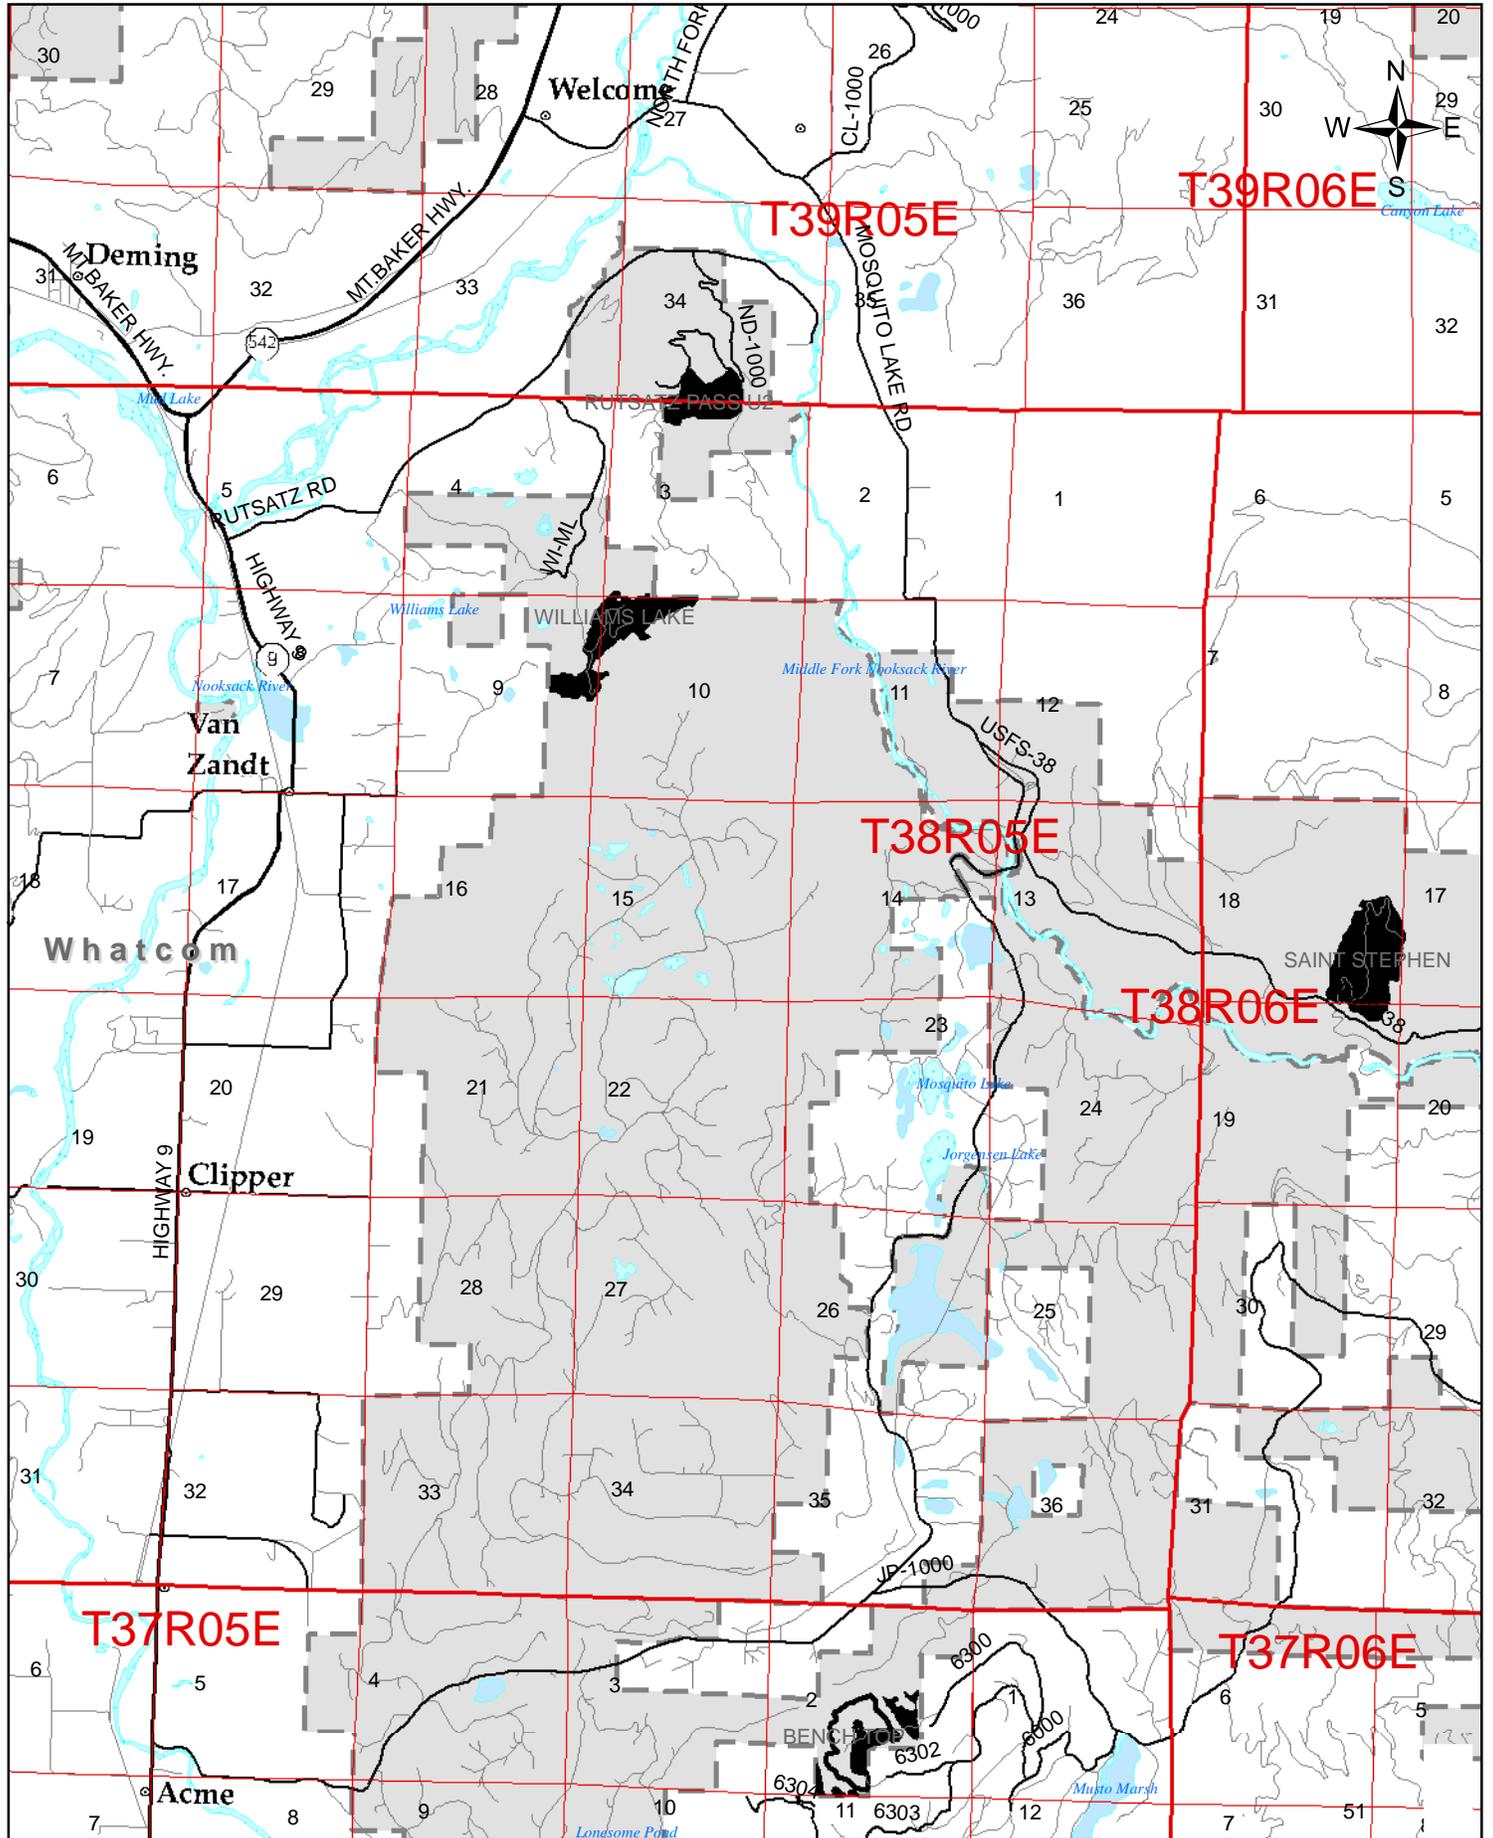

**UNIT DESCRIPTION**

**CONIFER RELEASE, GROUND HERBICIDE**

**INVITATION TO BID #1240**

**Region:** NORTHWEST

**District:** BAKER

**Local:** HAMILTON

**Unit Name:** Santa Maria 4

**Item Number:** 2

**Unit Number:** BK-14

**Section(s):** 36

**Township:** 37N

**Range:** 5E W.M.

**Trust:** 03

**Acres:** 19

**Total:** 19

**SPECIFICATIONS**

**Contract Period:** September 14, October 9, 2009

**Minimum Crew Size:** 6

**Boundaries:** See unit map.

**Buffer Zones:** Avoid herbicide application in stream channels with water present.

**Vegetation To Be Treated:** Hardwoods, elderberry, salmonberry, blackberry, thimbleberry and all new vegetation.

Product (Trade Name)	Active Ingredient (A.I.)	A.I. Concentration	Rate/Acre	Total Solution/Ac	Carrier	Marking Required
Accord Concentrate	Glyphosate	5.4 lbs/gal 53.8%	36 oz.	10 gallons	Water	Dye compatible with herbicide. Flag strip edges.
Oust XP	Sulfometuron Methyl	75% by weight	2 oz.			
Sylgard or Kinetic or Slither	N/A	N/A	0.5 oz.			

**Treatment Technique and Rate:** Ground broadcast, waving wand foliar application with backpack sprayers. Spray foliage till wet.

**Special Requirements:** Herbicide must be mixed on site in the presence of the DNR compliance representative. Applicator's equipment and application method must be in compliance with herbicide labels and Department of Agriculture regulations.

**GENERAL INFORMATION** – The following information is provided as a courtesy to bidders. This information is a general estimate and as such may not be accurate.

**Elevation:** 675 – 1060 Ft.

**Slope:** 30% Average

**Aspect:** W

**Gate:** Yes

**Access:** From Sedro Woolley, drive 10 miles north and turn right on Saxon Road. Drive 3.5 miles to the end of Saxon Road. Follow road to the right over the bridge to the locked gate. The road becomes the on the ED-ML. Follow the ED-ML for 2.9 miles to the junction of the ED-ML and the ED-29. Stay to the right and continue on the ED-ML for 0.8 miles to the ED-35. Turn right onto the ED-35 and travel 0.8 miles to the unit.


**Additional Comments:** Unit is behind a locked gate. Please contact Northwest Region at 360-856-3500 for gate information. Year Harvested 2006.

**Nearest Hospital:** United General Hospital: 1971 Highway 20, Sedro Woolley, WA. Ph: (360) 856-6021

BK- 14  
SANTA MARIA 4  
19 ACRES

# UNIT MAP

Invitation to Bid Number 1240  
Item 2

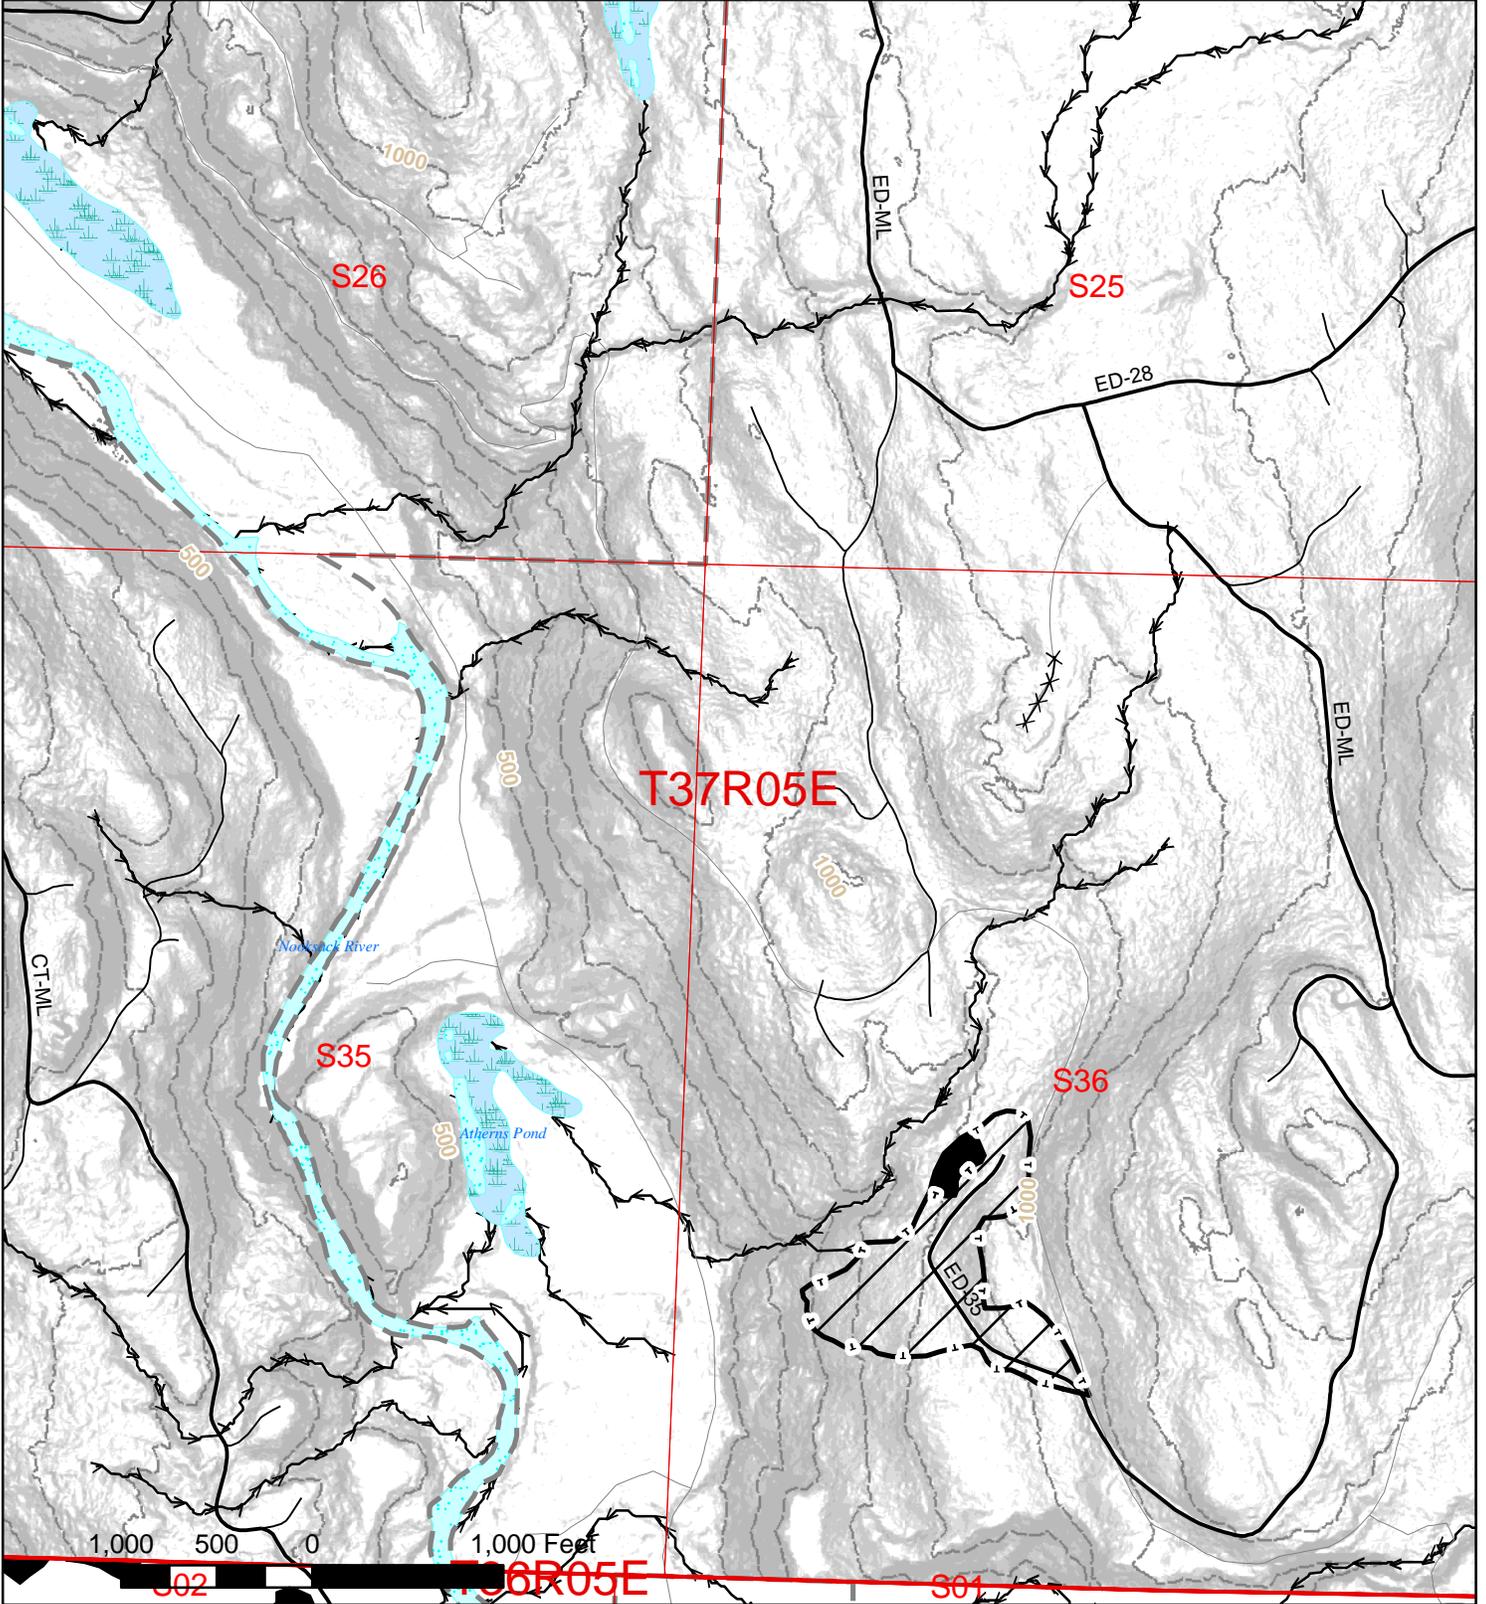

Roads	Treatment Unit	
Abandoned Road	DNR-Managed Lands	
Timber		

**UNIT DESCRIPTION**

**CONIFER RELEASE, GROUND HERBICIDE**

**INVITATION TO BID #1240**

**Region:** NORTHWEST

**District:** BAKER

**Local:** HAMILTON

**Unit Name:** Grits

**Item Number:** 2

**Unit Number:** BK-15

**Section(s):** 19

**Township:** 37N

**Range:** 5E W.M.

**Trust:** 01

**Acres:** 32

**Total:** 32

**SPECIFICATIONS**

**Contract Period:** September 14 – October 9, 2009

**Minimum Crew Size:** 6

**Boundaries:** See unit map.

**Buffer Zones:** Avoid herbicide application in stream channels with water present.

**Vegetation To Be Treated:** Hardwoods, elderberry, salmonberry, blackberry, thimbleberry and all new vegetation.

<b>Product (Trade Name)</b>	<b>Active Ingredient (A.I.)</b>	<b>A.I. Concentration</b>	<b>Rate/Acre</b>	<b>Total Solution/Ac</b>	<b>Carrier</b>	<b>Marking Required</b>
Accord Concentrate	Glyphosate	5.4 lbs/gal 53.8%	36 oz.	10 gallons	Water	Dye compatible with herbicide. Flag strip edges.
Oust XP	Sulfometuron Methyl	75% by weight	2 oz.			
Sylgard or Kinetic or Slither	N/A	N/A	0.5 oz.			

**Treatment Technique and Rate:** Ground broadcast, waving wand foliar application with backpack sprayers. Spray foliage till wet.

**Special Requirements:** Herbicide must be mixed on site in the presence of the DNR compliance representative. Applicator’s equipment and application method must be in compliance with herbicide labels and Department of Agriculture regulations.

**GENERAL INFORMATION** – The following information is provided as a courtesy to bidders. This information is a general estimate and as such may not be accurate.

**Elevation:** 1135 – 1585 Ft.

**Slope:** 26% Average

**Aspect:** E

**Gate:** Yes

**Access:** From Sedro-Woolley, travel 12.5 miles north on highway 9 and turn left onto the CC-ML. Go through the locked gate and continue up the CC-ML for 1.7 miles to the unit.


**Additional Comments:** Unit is behind a locked gate. Please contact Northwest Region at 360-856-3500 for gate information. Year Harvested 2007.

**Nearest Hospital:** United General Hospital: 1971 Highway 20, Sedro Woolley, WA. Ph: (360) 856-6021

BK- 15  
GRITS  
32 ACRES

# UNIT MAP

## Invitation to Bid Number 1240 Item 2

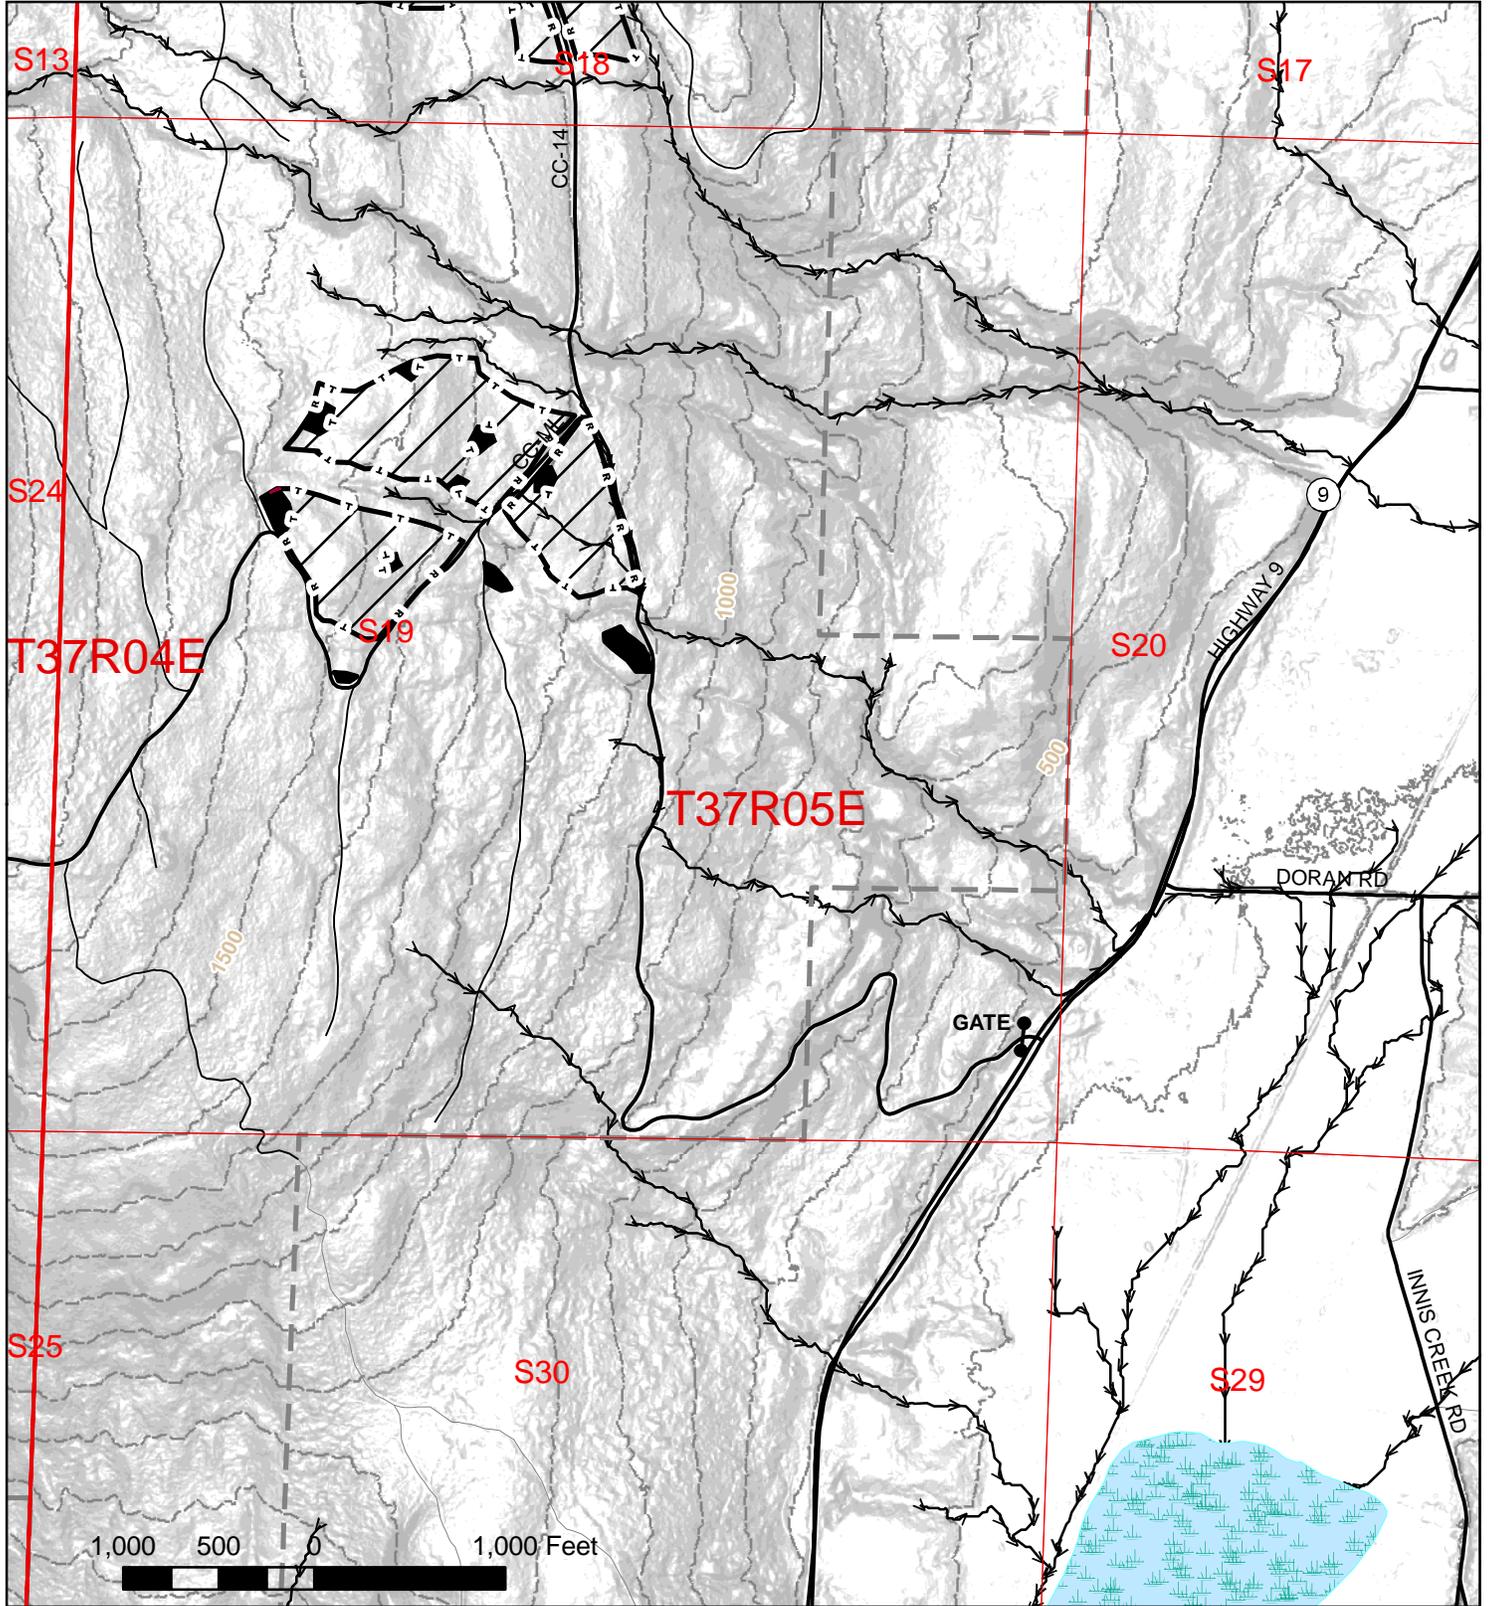

Roads	Treatment Unit	 N W E S 55
Abandoned Road	DNR-Managed Lands	
Timber	Roads(Unit Boundary)	

BK-4 BENCH TOP  
BK-5 MEDIAN 3 & APPLE PIE 1  
BK-6 APPLE PIE 2  
BK-14 SANTA MARIA 4  
BK-15 GRITS


# VICINITY MAP 4

## Invitation to Bid Number 1240

### Item 2



Northwest Region  
Baker District

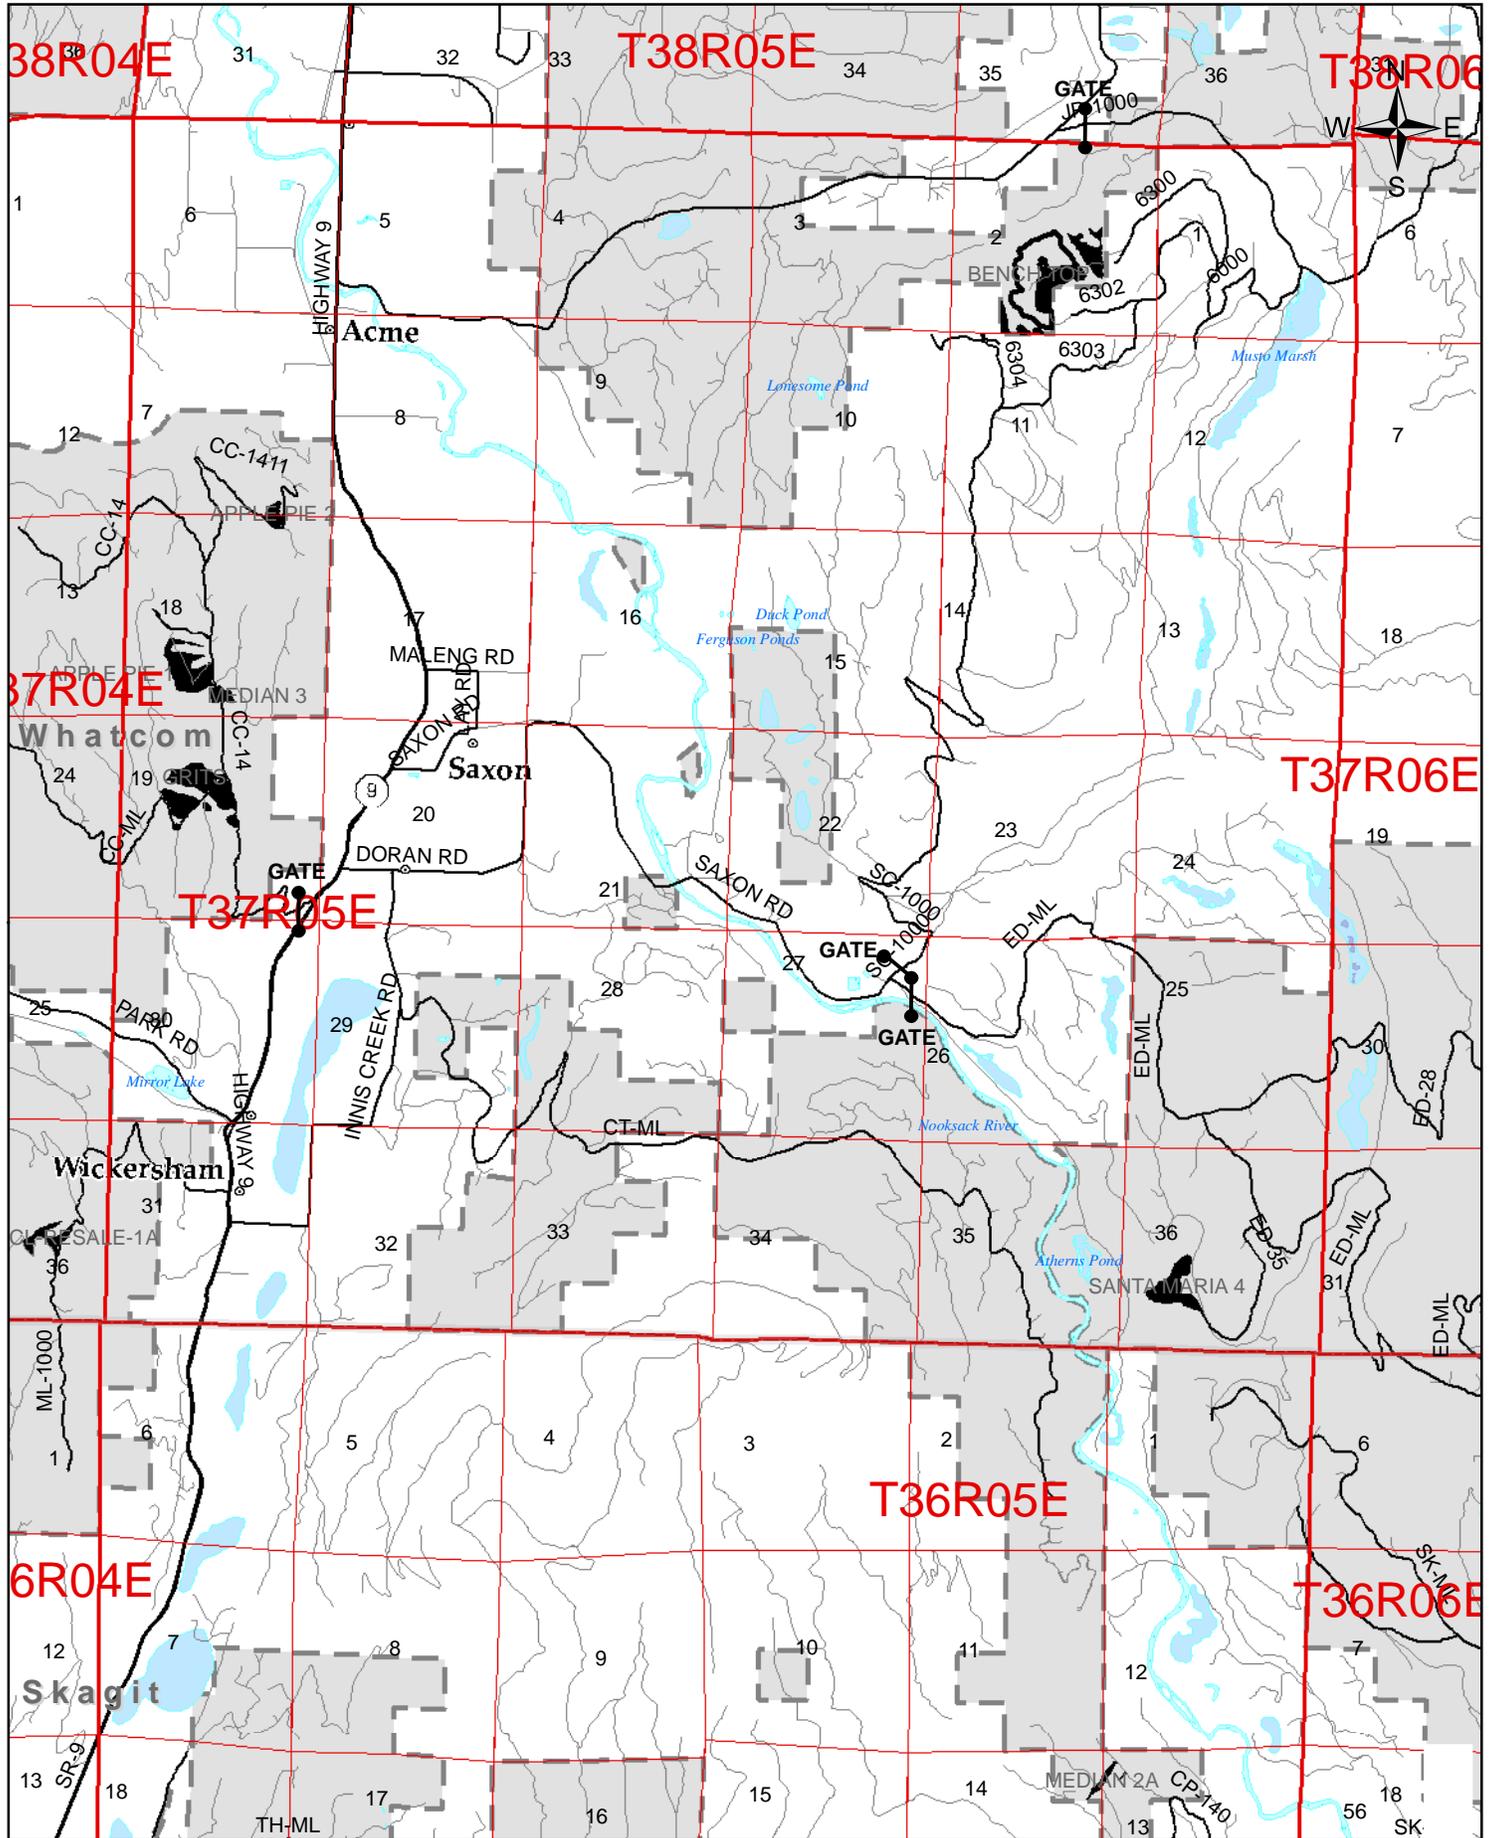

**UNIT DESCRIPTION**

**CONIFER RELEASE, GROUND HERBICIDE**

**INVITATION TO BID #1240**

**Region:** NORTHWEST

**District:** BAKER

**Local:** HAMILTON

**Unit Name:** CL- Resale-1A

**Item Number:** 2

**Unit Number:** BK-16

**Section(s):** 36

**Township:** 37N

**Range:** 4E W.M.

**Trust:** 03

**Acres:** 9

**Total:** 9

**SPECIFICATIONS**

**Contract Period:** September 14 – October 9, 2009

**Minimum Crew Size:** 6

**Boundaries:** See unit map.

**Buffer Zones:** Avoid herbicide application in stream channels with water present.

**Vegetation To Be Treated:** Hardwoods, elderberry, salmonberry, blackberry, thimbleberry and all new vegetation.

Product (Trade Name)	Active Ingredient (A.I.)	A.I. Concentration	Rate/Acre	Total Solution/Ac	Carrier	Marking Required
Accord Concentrate	Glyphosate	5.4 lbs/gal 53.8%	36 oz.	10 gallons	Water	Dye compatible with herbicide. Flag strip edges.
Oust XP	Sulfometuron Methyl	75% by weight	2 oz.			
Sylgard or Kinetic or Slither	N/A	N/A	0.5 oz.			

**Treatment Technique and Rate:** Ground broadcast, waving wand foliar application with backpack sprayers. Spray foliage till wet.

**Special Requirements:** Herbicide must be mixed on site in the presence of the DNR compliance representative. Applicator’s equipment and application method must be in compliance with herbicide labels and Department of Agriculture regulations.

**GENERAL INFORMATION** – The following information is provided as a courtesy to bidders. This information is a general estimate and as such may not be accurate.

**Elevation:** 1125 – 1520 Ft.

**Slope:** 38% Average

**Aspect:** E

**Gate:** Yes

**Access:** From Sedro Woolley, drive 10 miles north on HWY 9 and turn left onto the ML–1000. Follow the ML-1000 through the locked gate for 1.9 miles to unit.


**Additional Comments:** Unit is behind a locked gate. Please contact Northwest Region at 360-856-3500 for gate information. Year Harvested 2007.

**Nearest Hospital:** United General Hospital: 1971 Highway 20, Sedro Woolley, WA. Ph: (360) 856-6021

BK- 16  
CL-RESALE-1A  
9 ACRES

# UNIT MAP

Invitation to Bid Number 1240  
Item 2

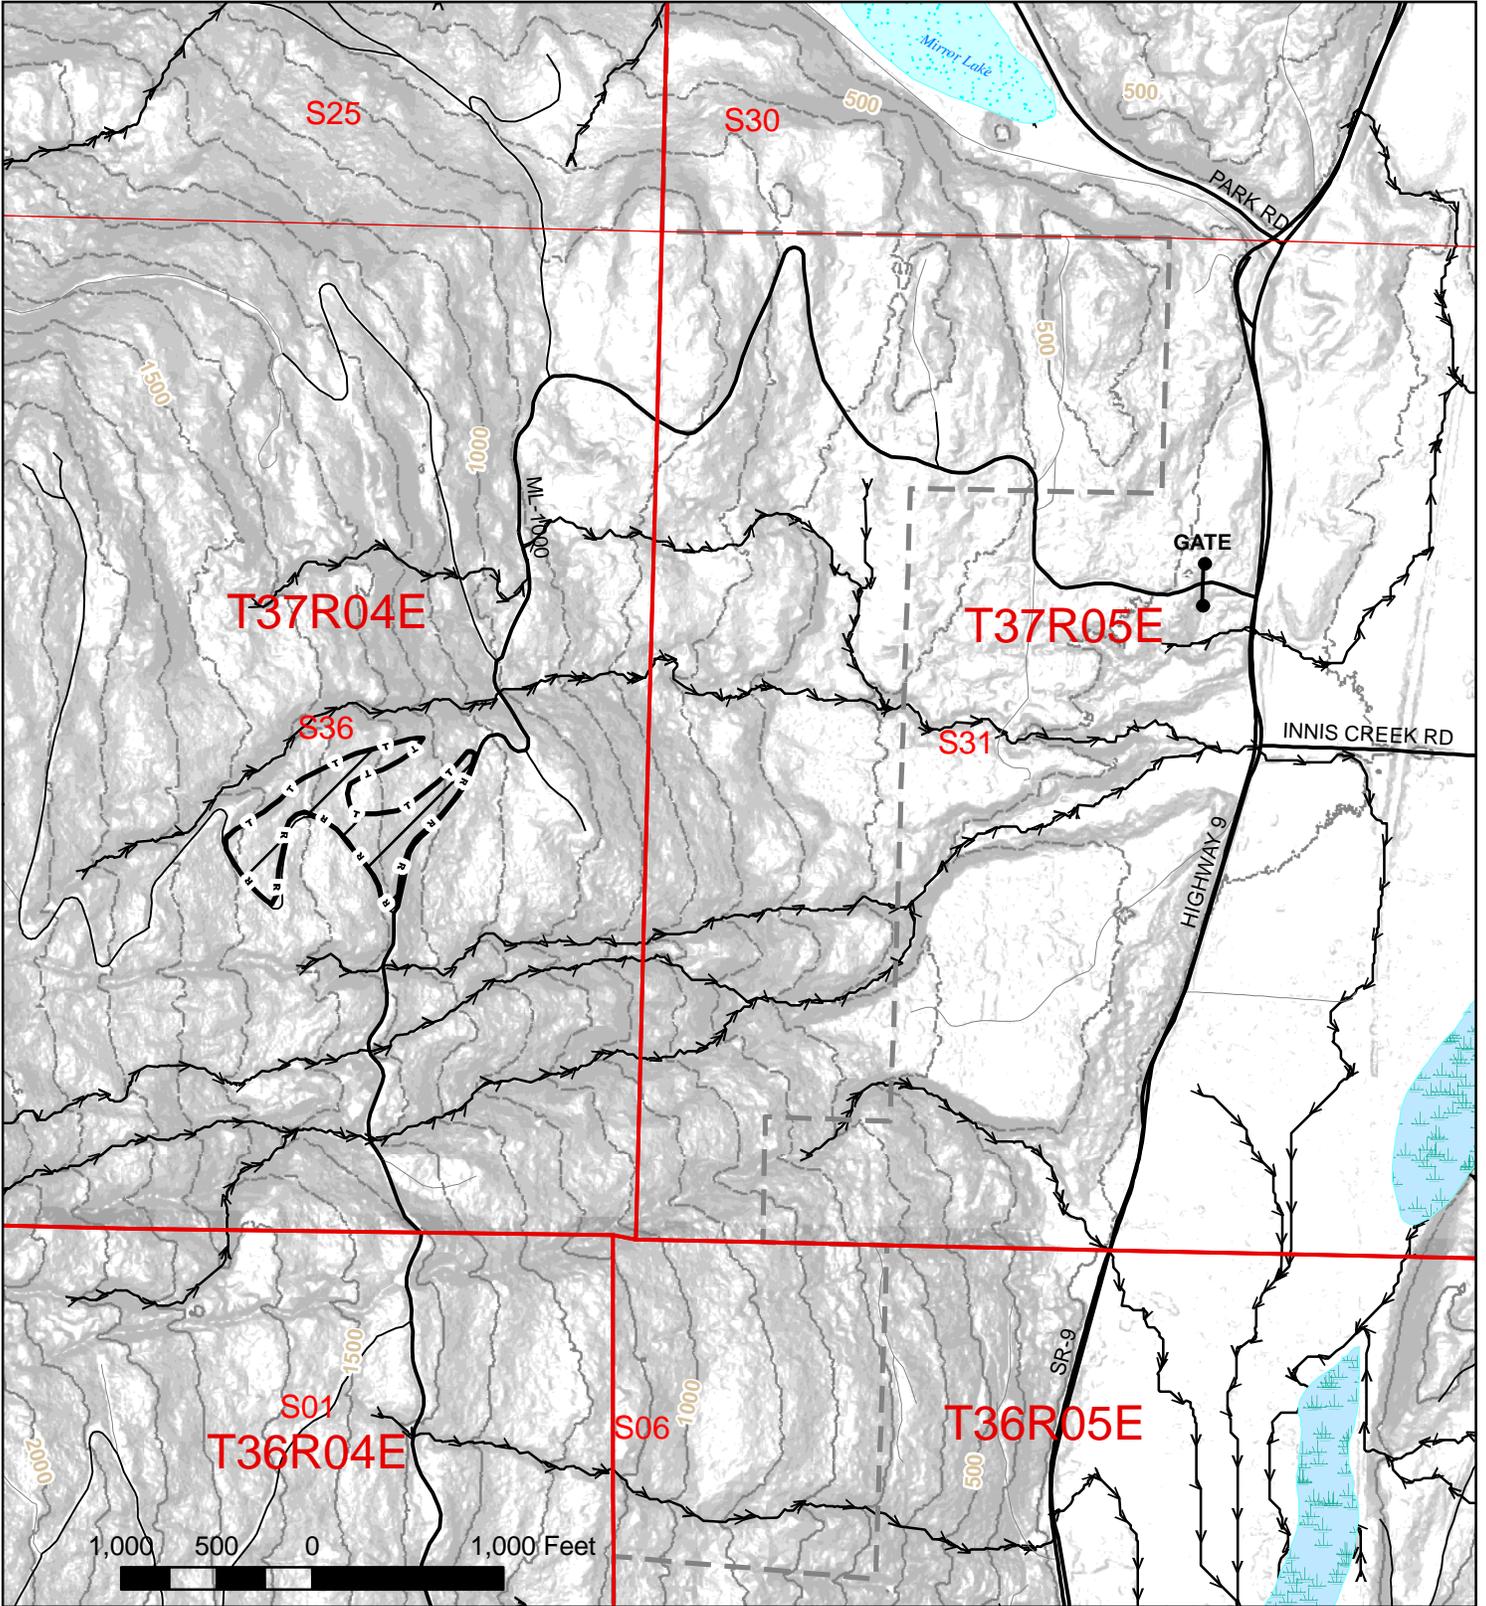


Roads	Treatment Unit	
Abandoned Road	DNR-Managed Lands	
Timber	Road (Unit Boundary)	

BK-7 MILLS CREEK REGEN  
BK-10 ALGER HWD A & B  
BK-16 CL RESALE-1A

# VICINITY MAP 5

## Invitation to Bid Number 1240

### Item 2

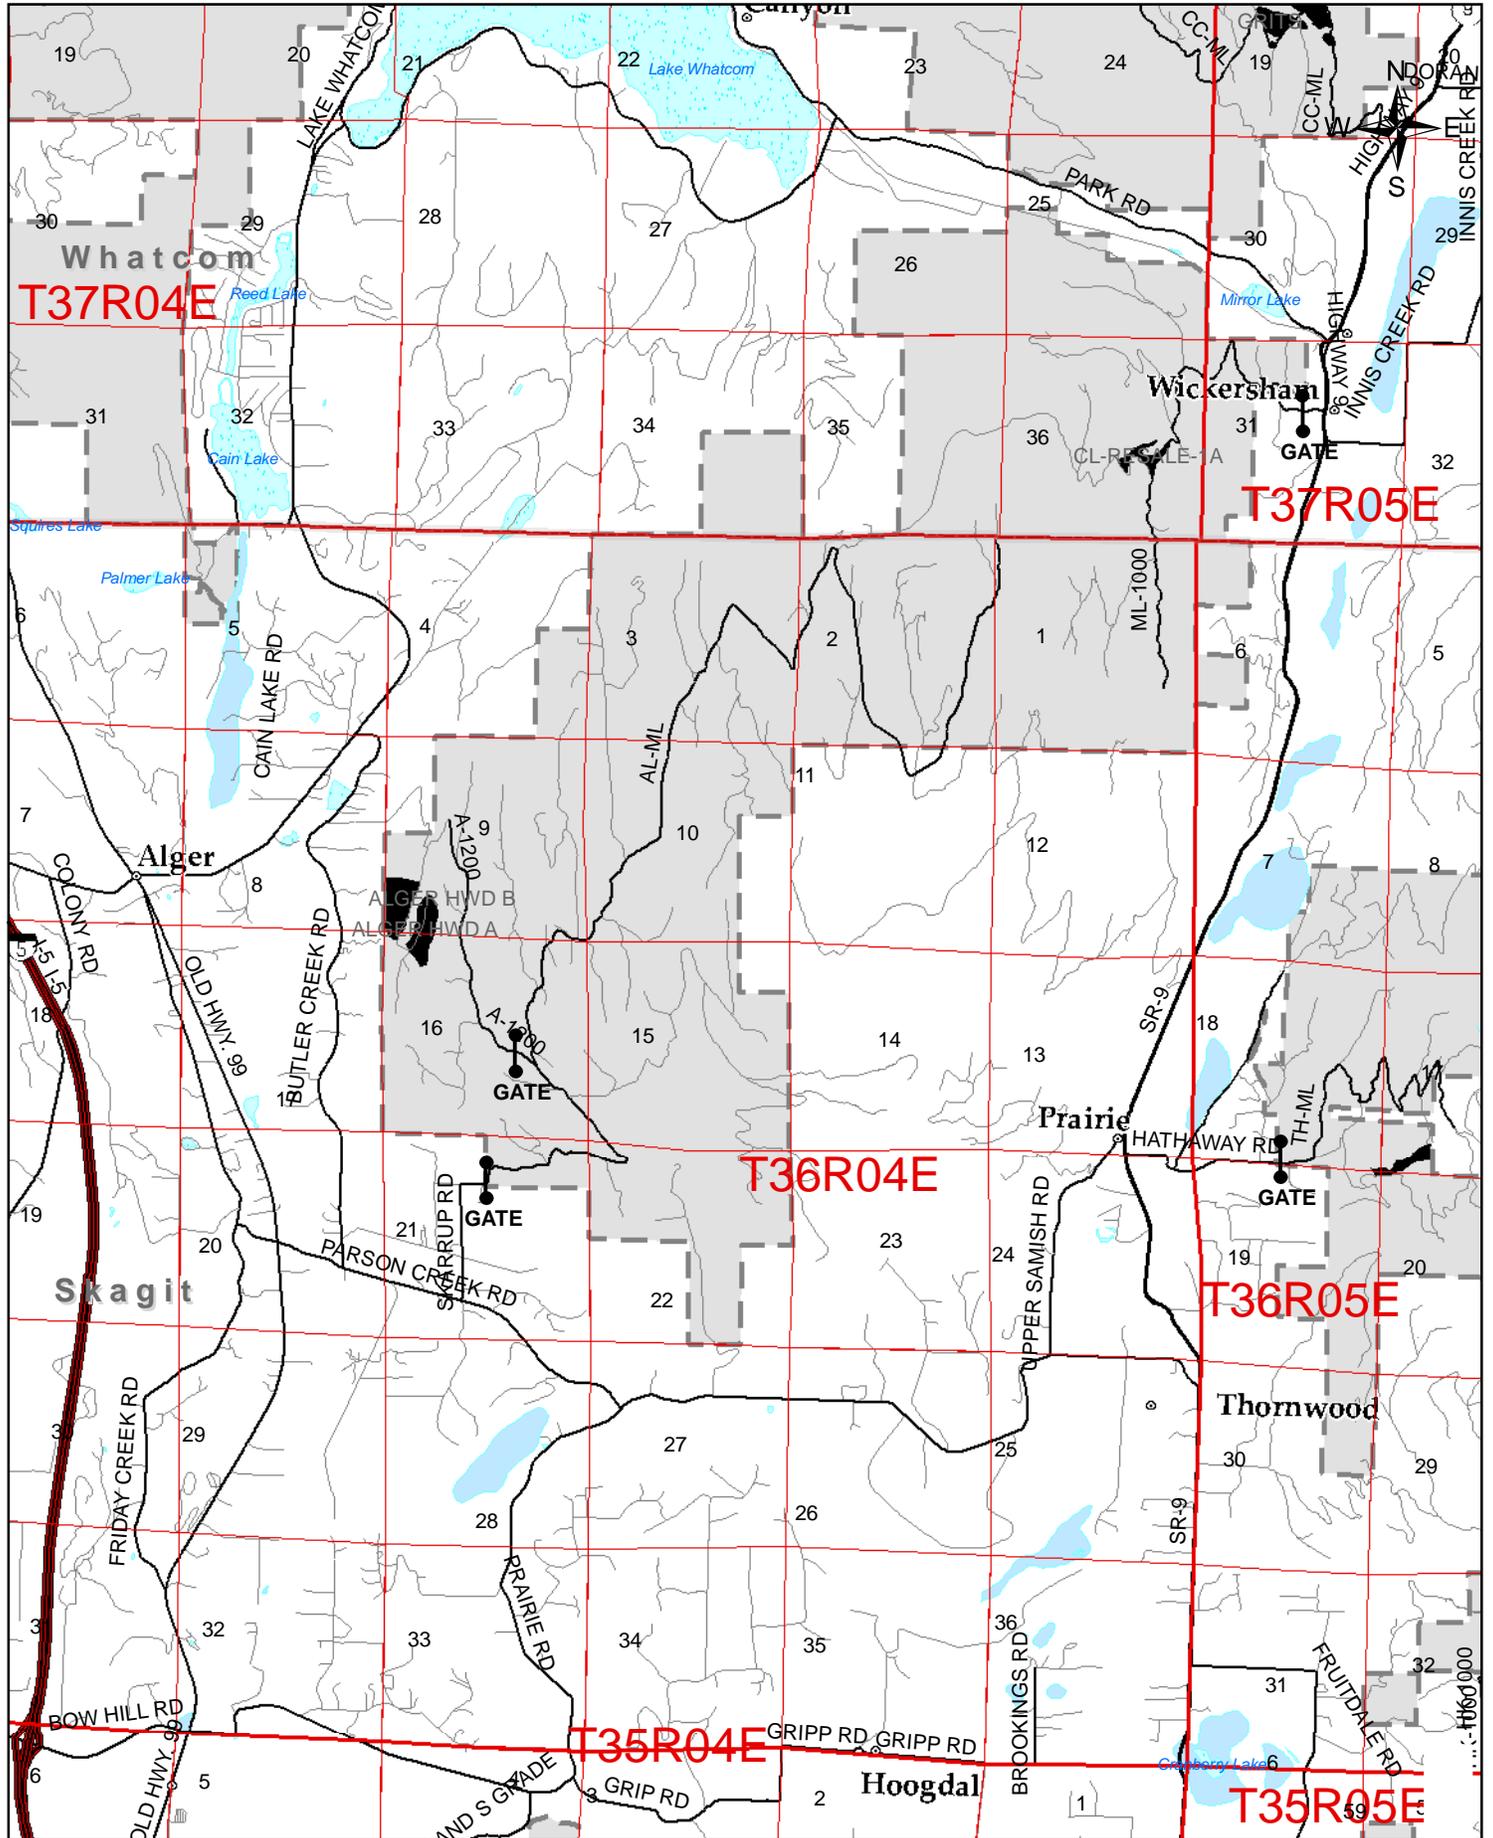

**UNIT DESCRIPTION**

**CONIFER RELEASE, GROUND HERBICIDE**

**INVITATION TO BID #1240**

**Region:** NORTHWEST

**District:** BAKER

**Local:** HAMILTON

**Unit Name:** Red Rider 2A

**Item Number:** 1

**Unit Number:** BK-17

**Section(s):** 2

**Township:** 35N

**Range:** 5E W.M.

**Trust:** 01

**Acres:** 12

**Total:** 12

**SPECIFICATIONS**

**Contract Period:** September 14 – October 9, 2009

**Minimum Crew Size:** 6

**Boundaries:** See unit map.

**Buffer Zones:** Avoid herbicide application in stream channels with water present.

**Vegetation To Be Treated:** Hardwoods, elderberry, salmonberry, blackberry, thimbleberry and all new vegetation.

Product (Trade Name)	Active Ingredient (A.I.)	A.I. Concentration	Rate/Acre	Total Solution/Ac	Carrier	Marking Required
Accord Concentrate	Glyphosate	5.4 lbs/gal 53.8%	36 oz.	10 gallons	Water	Dye compatible with herbicide. Flag strip edges.
Oust XP	Sulfometuron Methyl	75% by weight	2 oz.			
Sylgard or Kinetic or Slither	N/A	N/A	0.5 oz.			

**Treatment Technique and Rate:** Ground broadcast, waving wand foliar application with backpack sprayers. Spray foliage till wet.

**Special Requirements:** Herbicide must be mixed on site in the presence of the DNR compliance representative. Applicator’s equipment and application method must be in compliance with herbicide labels and Department of Agriculture regulations.

**GENERAL INFORMATION** – The following information is provided as a courtesy to bidders. This information is a general estimate and as such may not be accurate.

**Elevation:** 1370 – 1730 Ft.      **Slope:** 42% Average      **Aspect:** SW      **Gate:** Yes

**Access:** From Sedro Woolley drive 10 miles east on HWY 20 and turn left onto Cabin Creek Rd. Follow Cabin Creek for 0.25 miles and turn right onto Hamilton Cemetery Rd. Follow Hamilton Cemetery for 0.2 miles and turn left onto Scott Paper Rd. Follow Scott Paper Rd. to the locked gate. Road becomes the SK-ML. Follow the SK-ML Rd. for 3.0 miles and turn left onto the CP-110. Follow the CP-110 through the locked gate for 3.8 miles and turn left onto the SK-33 and go 0.8 miles to the treatment area. **Road into unit has been abandoned.**


**Additional Comments:** Unit is behind a locked gate. Please contact Northwest Region at 360-856-3500 for gate information. Year Harvested 2006.

**Nearest Hospital:** United General Hospital: 1971 Highway 20, Sedro Woolley, WA. 98284 Ph: 360-856-6021

BK- 17  
RED RIDER 2A  
12 ACRES

# UNIT MAP

Invitation to Bid Number 1240  
Item 2

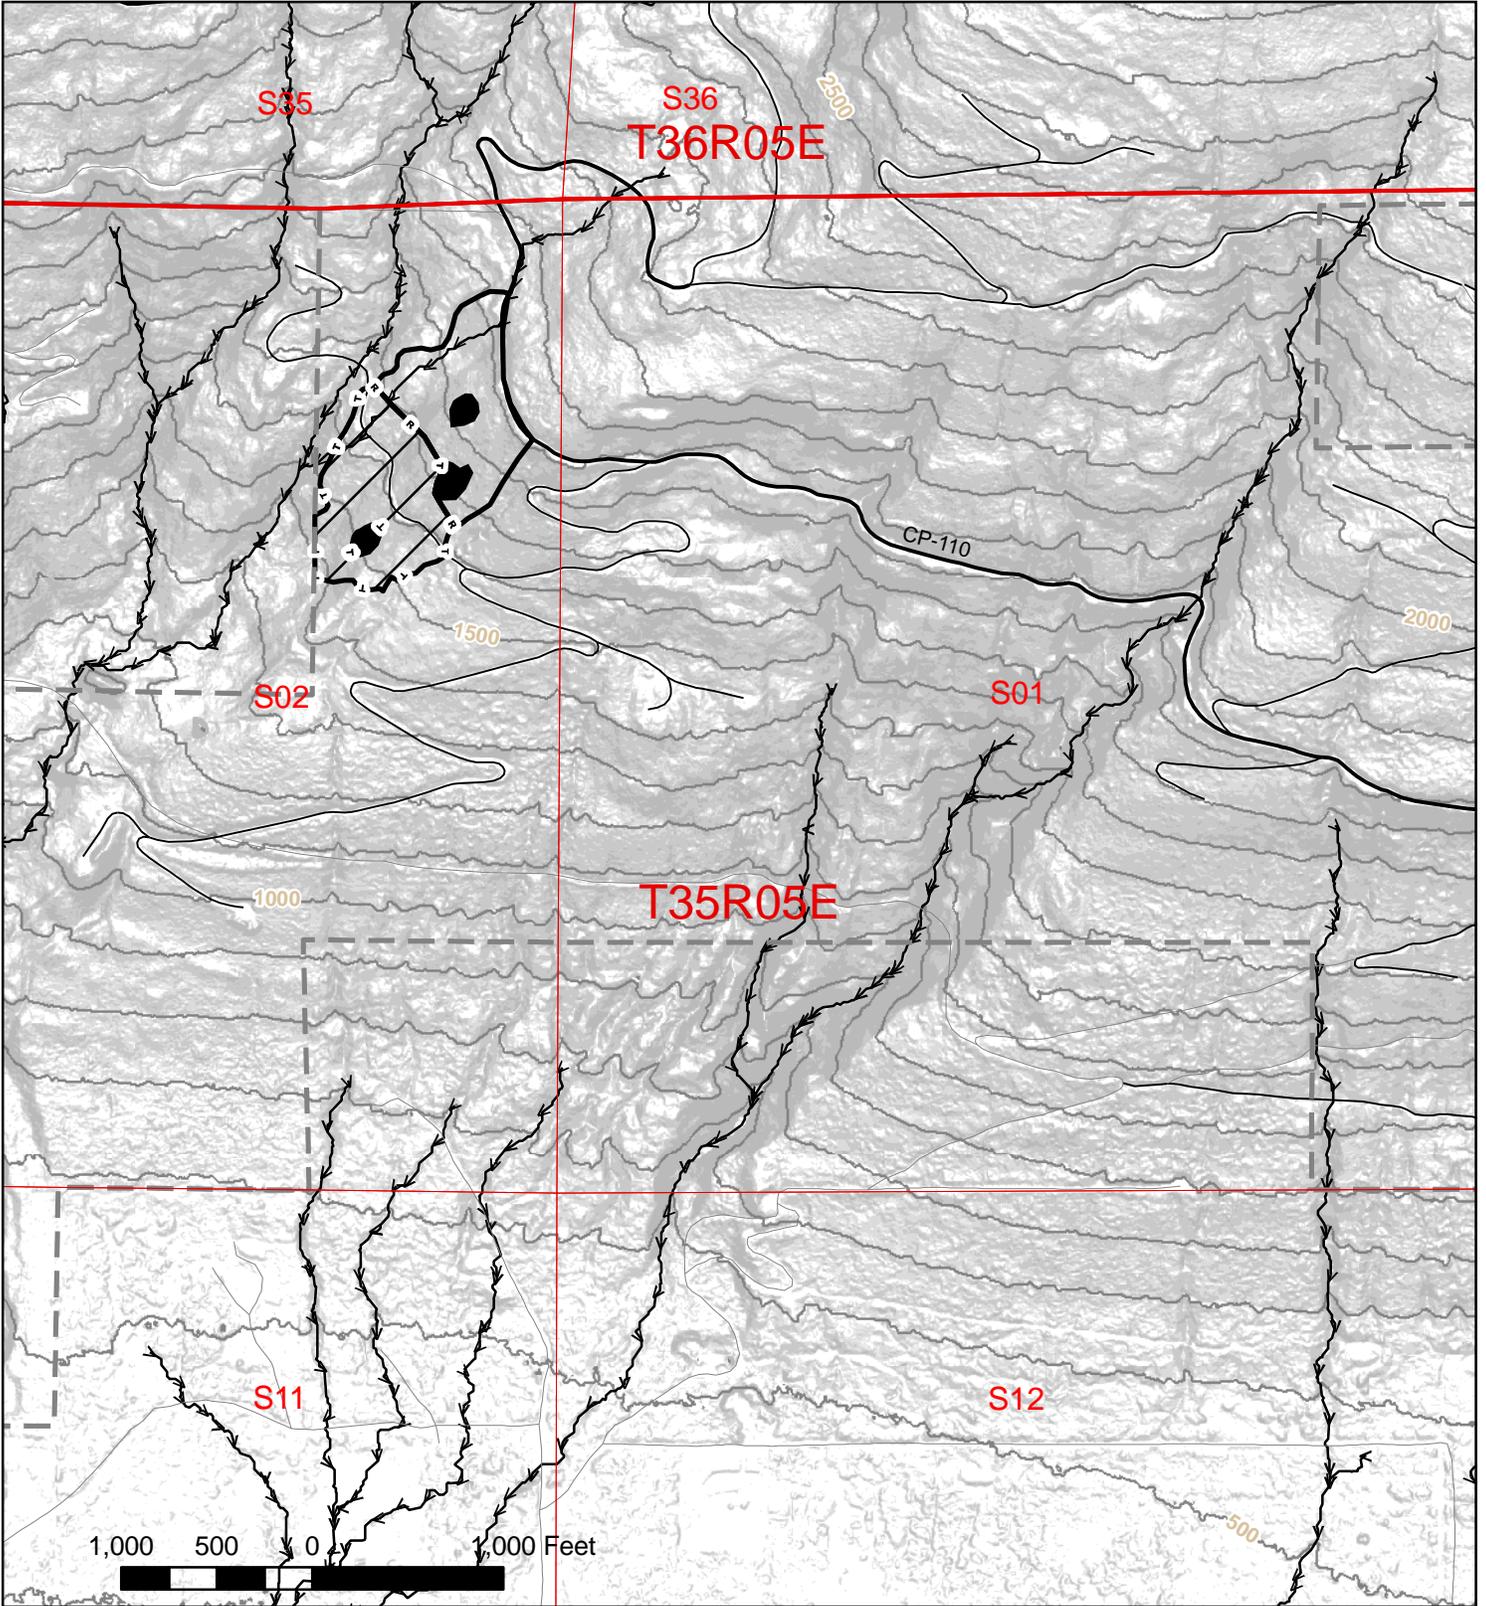


Roads	Treatment Unit	 N W E S 61
Abandoned Road	DNR-Managed Lands	
Timber	Plantation	

BK-8 GINGER BREAD 1  
BK-9 MEDIAN 2AB  
BK-17 RED RIDER 2A

# VICINITY MAP 6

## Invitation to Bid Number 1240

### Item 2

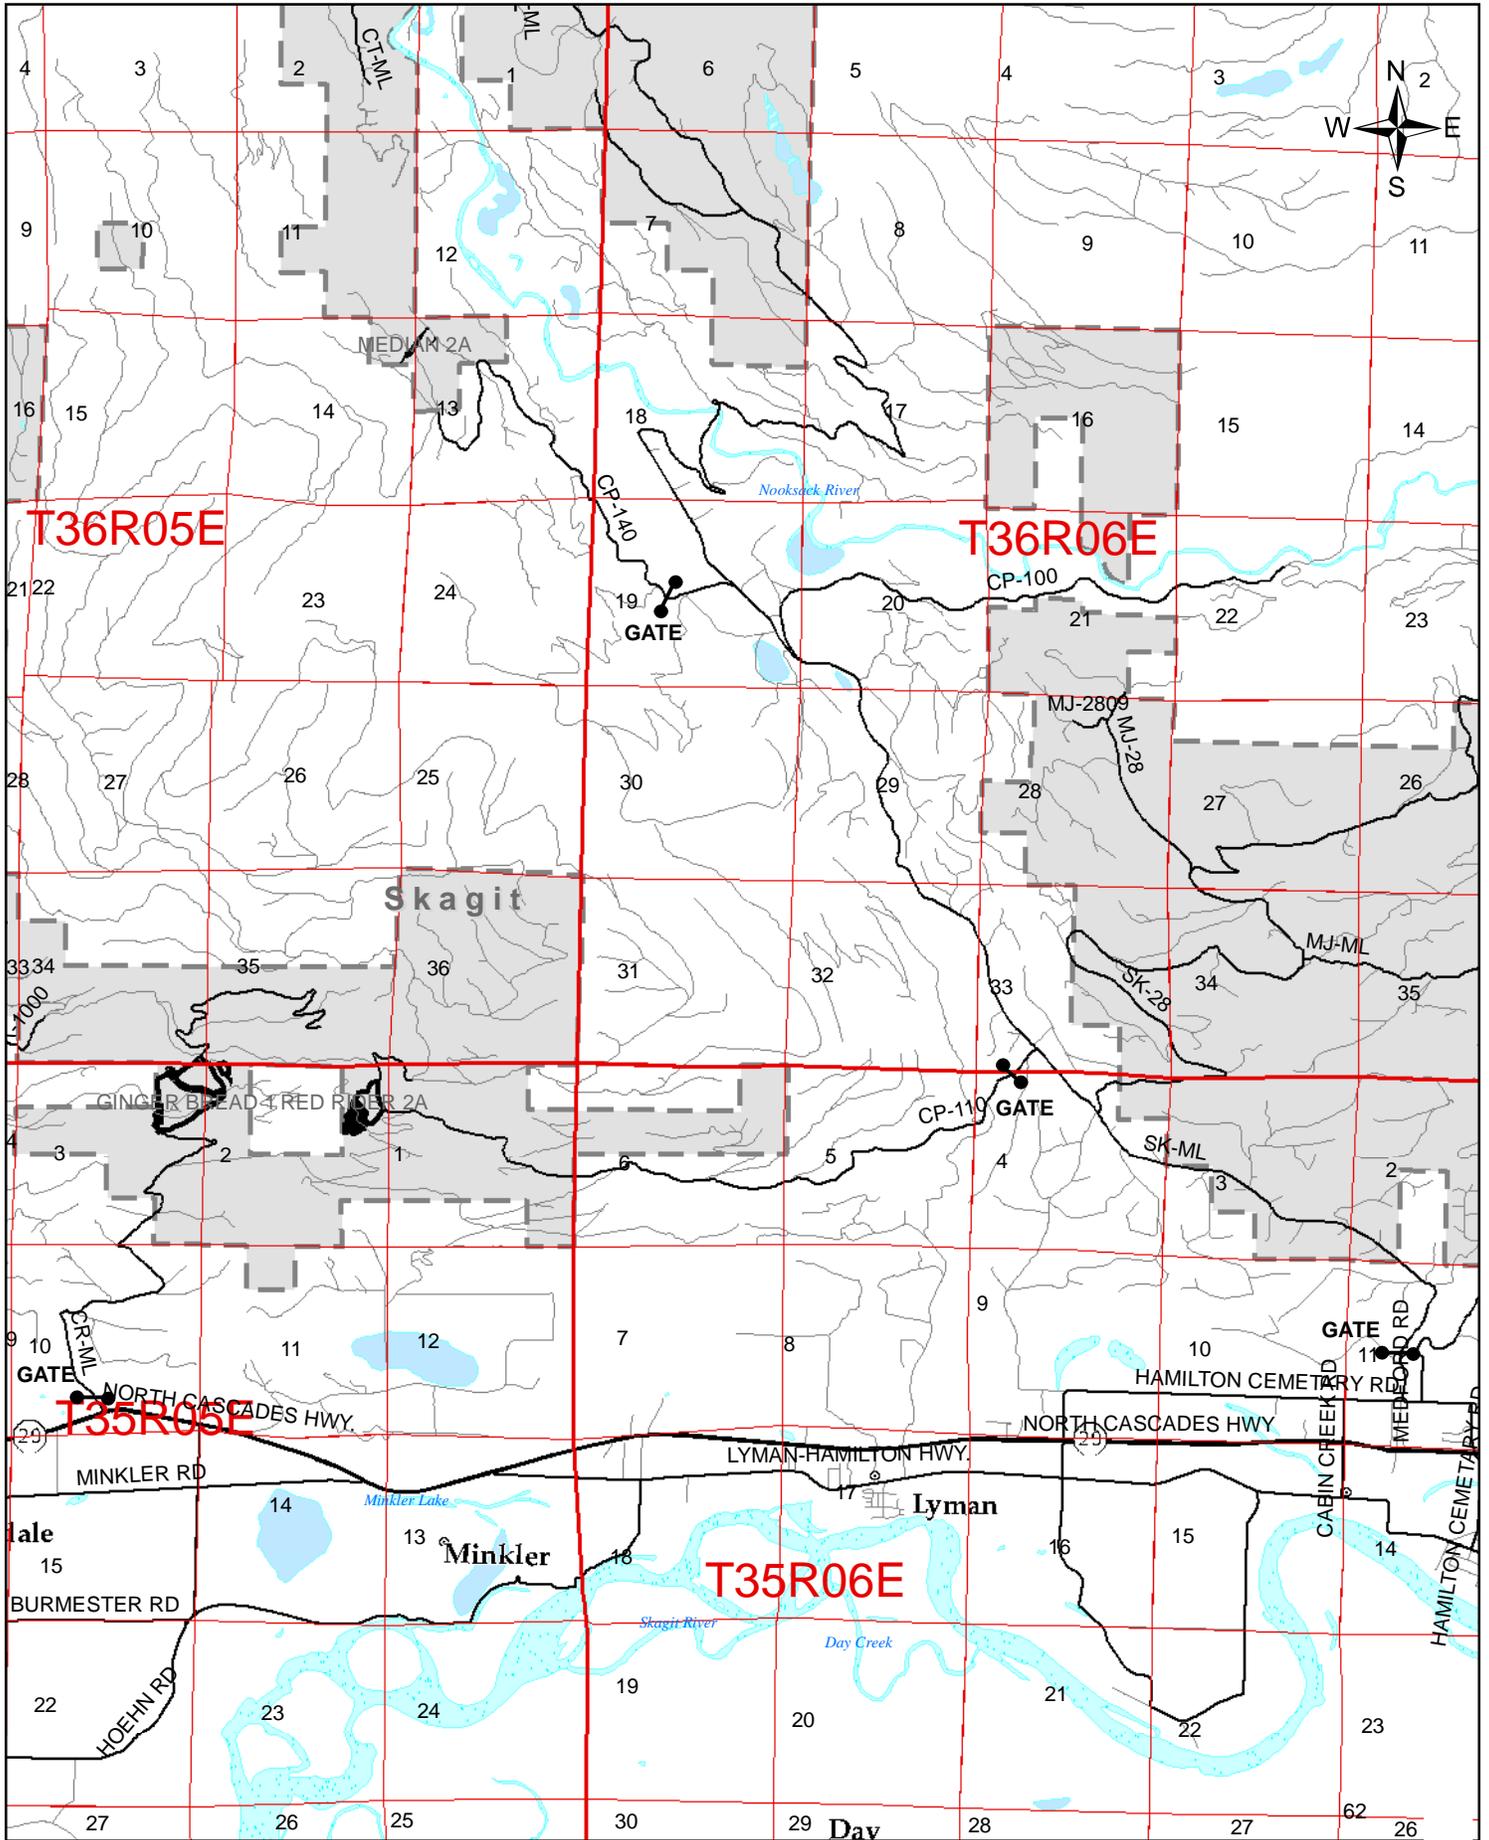

SECTION IV  
BID FORM

CONIFER RELEASE/SITE PREPARATION GROUND HERBICIDE

INVITATION TO BID/CONTRACT NUMBER **1240**

Award of contract shall be on an **Item** basis as per Clause 1-42.

At the following rates, the undersigned hereby offers and agrees to furnish materials, equipment, supplies, supervision, and services in compliance with all terms, conditions and specifications of Invitation to Bid/Contract Number **1240**.

Item No.	Unit No.	Trust	Acres	Unit Bid Price Unit Total <sup>2</sup>	
<b>1</b>	CA-1	01	17	\$ _____/Ac	\$ _____
	CA-2	01/03	13	\$ _____/Ac	\$ _____
	CA-3	01	<u>35</u>	\$ _____/Ac	\$ _____
	<b>Item 1 Total Acres</b>		<b>65</b>		
					<b>Total Price Item 1</b>
<b>2</b>	BK-1	01/08	49	\$ _____/Ac	\$ _____
	BK-2	10	10	\$ _____/Ac	\$ _____
	BK-3	01	75	\$ _____/Ac	\$ _____
	BK-4	01	28	\$ _____/Ac	\$ _____
	BK-5	01	30	\$ _____/Ac	\$ _____
	BK-6	01	5	\$ _____/Ac	\$ _____
	BK-7	01/03	10	\$ _____/Ac	\$ _____
	BK-8	01	3	\$ _____/Ac	\$ _____
	BK-9	01	4	\$ _____/Ac	\$ _____
	BK-10	01	40	\$ _____/Ac	\$ _____
	BK-11	01	26	\$ _____/Ac	\$ _____
	BK-12	01/10	44	\$ _____/Ac	\$ _____
	BK-13	03	92	\$ _____/Ac	\$ _____
	BK-14	03	19	\$ _____/Ac	\$ _____
	BK-15	01	32	\$ _____/Ac	\$ _____
	BK-16	03	9	\$ _____/Ac	\$ _____
	BK-17	01	<u>12</u>	\$ _____/Ac	\$ _____
<b>Item 2 Total Acres</b>		<b>488</b>			\$ _____
					<b>Total Price Item 2</b>
<b>Total Acreage in Items 1 and 2</b>			<b>553 Acres</b>		

Please limit my total award to a maximum of approximately \_\_\_\_\_ acres.

The business named hereon is certified by the Office of Minority and Women's Business Enterprises and is bidding as a \_\_\_\_\_ owned business. (Enter either minority or woman, if appropriate.)

Firm Name \_\_\_\_\_ Address \_\_\_\_\_

Signature \_\_\_\_\_ City and State \_\_\_\_\_

Title \_\_\_\_\_ Phone \_\_\_\_\_

Note:

Detach and return one (1) copy of this form as per Clause 1-22.

<sup>1</sup>An approximate number.

<sup>2</sup>Exclusive of Washington State Sales Tax.



**DEPARTMENT OF NATURAL RESOURCES  
PESTICIDE APPLICATION RECORD**



This form must be completed the same day as the application. Retention period is seven (7) years, ([Chapter 17.21 RCW](#)).

Date of Application: Year \_\_\_\_\_ Month \_\_\_\_\_ Day \_\_\_\_\_

FMU Name: \_\_\_\_\_ FMU Acres: \_\_\_\_\_

FMU Legal: \_\_\_\_\_

Property Owner: Dept of Natural Resources, 919 N. Township Street, Sedro Woolley, WA 98284

DNR Employee in charge: \_\_\_\_\_ (Herbicide License # \_\_\_\_\_)

Applicator's Name & Address: \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_

Applicator's Herbicide License #: \_\_\_\_\_

Vegetation being treated: \_\_\_\_\_

**Herbicide Information**

Brand Name	Generic Name	EPA Reg. #	Volume per acre	Total Mix per acre w/water

**Weather Conditions**

Time	Wind Direction	Wind Speed (mph)	Air Temp. (deg. F)	RH (%)

**Comments**

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_